



STREAMLIGHT®



FULL LINE

**PROFESSIONAL
ILLUMINATION TOOLS**

// STINGER® AND STRION® SERIES



Stinger® 2020
pg. 6

Stinger® 2020 S
pg. 7

Stinger LED HL® //
Stinger DS LED HL®
pg. 8

Stinger®
Color-Rite®
pg. 8

Stinger HPL® //
Stinger DS® HPL
pg. 9

Stinger® LED //
Stinger DS® LED
pg. 9

PolyStinger®
LED HAZ-LO®
pg. 10



PolyStinger® LED //
PolyStinger DS® LED
pg. 11



UltraStinger® LED
pg. 11



Strion® 2020
pg. 14



Strion HL® //
Strion® DS HL
pg. 15



Strion® HPL //
Strion DS HPL®
pg. 15



Strion® LED //
Strion® DS
pg. 16

// SL® SERIES

// WORK LIGHT SERIES

// WAYPOINT® SERIES



SL-20L® // SL-20LP®
pg. 18

Stinger Switchblade®//
Strion Switchblade®
pg. 22

Cyclone® Series
pg. 24

FlipMate®
pg. 24

BearTrap® 360
pg. 25

Waypoint®
pg. 35

Waypoint® 400
pg. 35

// PORTABLE SCENE LIGHT AND LANTERN SERIES



NEW

Portable Scene
Light II pg. 26

Portable Scene
Light pg. 26

Vulcan Clutch®
pg. 28

Vulcan® 180 Series
pg. 29

Fire Vulcan® LED
pg. 32

Portable Scene
Light III pg. 27

E-Flood® LiteBox® //
E-Flood® FireBox®
pg. 30

E-Spot® LiteBox® //
E-Spot® FireBox®
pg. 30

NEW

LiteBox® 1Million®
pg. 31

// SIEGE® SERIES

// SURVIVOR® SERIES

// VANTAGE® SERIES



Super Siege®
pg. 36

The Siege®
pg. 37

Siege® AA
pg. 37

Survivor® X
pg. 38

Survivor®
pg. 39

Survivor Pivot®
pg. 40

Vantage® 180 X
pg. 42

Vantage®
pg. 42

Vantage® II
pg. 43

UPGRADED

// SAFETY-RATED HANDHELD LIGHTS



Dualie® Rechargeable
pg. 46



Dualie® 3AA
pg. 47



Dualie® 3AA Laser
pg. 47



Dualie® 3AA Color-Rite®
pg. 48



Dualie® 2AA
pg. 48



Stylus Pro® HAZ-LO®
pg. 48

// ENDURO® HEADLAMP SERIES



2AAA // 2AA ProPolymer®
HAZ-LO® pg. 49



4AA ProPolymer®
LED // Lux pg. 50



Enduro® Pro USB
pg. 110



Enduro® Pro
pg. 111



Enduro®
pg. 111



Enduro® Pro HAZ-LO®
pg. 114

// SL-SIDESADDLE® AND HEADLAMP SERIES



SL-SideSaddle®
pg. 112



3AA HAZ-LO®
pg. 114



USB HAZ-LO® Headlamp
pg. 115



ProTac HL® USB // HL®
Headlamps pg. 116



ProTac® 2.0 Headlamp
pg. 117



Trident®
pg. 118



Septor®
pg. 118



Argo®
pg. 118



Bandit® // Bandit® Pro
pg. 119



Double Clutch® USB
pg. 120



Sledge®
pg. 120

// STREAM™ SERIES



MegaStream®
USB pg. 122



MegaStream®
HP USB pg. 122



MicroStream®
pg. 123



MacroStream®
USB pg. 123



MicroStream®
USB pg. 123



Stylus Pro® USB
Series pg. 124



Stylus Pro®
pg. 124



Stylus® Series
pg. 125



Stylus Reach®
pg. 126

// STYLUS® SERIES

// STREAMLIGHT® JR SERIES



Streamlight Jr. F-Stop®
pg. 127



Streamlight Jr.® LED/Reach
pg. 127

// CLIPMATE®, POCKET MATE® AND NANO LIGHT® II



ClipMate® USB
pg. 126



Pocket Mate® USB
pg. 128



Nano Light® II
pg. 128

// TLR-1®, TLR-2®, TLR-3® X AND TLR-4® SERIES



TLR-1 HL®
pg. 55



TLR-1 HL-X®
pg. 56



TLR-1® HP
pg. 57



TLR-1® HP-X
pg. 57



TLR-1® // TLR-1®s
pg. 58



TLR-2 HL®
pg. 58



TLR-2 HL® G
pg. 58



TLR-2® // TLR-2®s
pg. 59



TLR-2® G
pg. 59



TLR-3® X
pg. 59



TLR-4®
pg. 60



TLR-4® G
pg. 60

// TLR-6® AND TLR-7® X SERIES



TLR-6®
pg. 60



TLR-6 HL®
pg. 61



TLR-7® X
pg. 62



TLR-7® X Contour
Remote pg. 62



TLR-7® HL-X USB
pg. 64



TLR-7® X sub
pg. 65



TLR-7® HL-X sub
pg. 65

// TLR-8® X SERIES



TLR-8® HL-X
pg. 66



TLR-8® HL-X G
pg. 66



TLR-8® HL-X sub
pg. 67



TLR-8® HL-X G sub
pg. 67



TLR-8® X sub
pg. 68



TLR-8® X G sub
pg. 68

// TLR-9®, TLR-10® AND TLR-VIR® II



TLR-8® X
pg. 69



TLR-8® X G
pg. 69



TLR-9®
pg. 69



TLR-10®
pg. 70



TLR-10® G
pg. 70



TLR-VIR® II
pg. 71

// TLR® RM SERIES



TLR® RM 1 HL-X
pg. 72



TLR® RM 1
pg. 72



TLR® RM 2
pg. 73



TLR® RM 1 Laser
pg. 74



TLR® RM 2 Laser
pg. 74



TLR® RM 1 Laser-G
pg. 75



TLR® RM 2 Laser-G
pg. 75

// TLR-1 HPL® AND TL-RACKER®



TLR-1 HPL®
pg. 76



TL-Racker®
pg. 77

// PROTAC® RAIL MOUNT SERIES



ProTac® Rail Mount 1L-X
Series pg. 80



ProTac® Rail Mount 1
pg. 81



ProTac® Rail Mount 2
pg. 81

// PROTAC® RAIL MOUNT SERIES



ProTac® Rail Mount HL-X pg. 83

ProTac® Rail Mount HL-X Pro pg. 82

ProTac® Rail Mount HL-X Laser pg. 83

ProTac® Rail Mount HP-X Pro pg. 84

ProTac® 2.0 Rail Mount pg. 84

ProTac® 2.0 Rail Mount HP pg. 85

ProTac® Rail Mount VIR pg. 5

// PROTAC® AND POLYTAC® SERIES



ProTac® 1L-1AA pg. 90

ProTac® 2.0 pg. 91

ProTac® 2.0 HP pg. 91

ProTac® 2AA-X pg. 92

ProTac® 2L pg. 93

ProTac® 2L-X pg. 93

ProTac® HL-X pg. 94

ProTac® HP-X pg. 94

ProTac HL® pg. 95



ProTac® 90X pg. 95

ProTac HL® 6 pg. 96

ProTac HL® 5-X pg. 96

ProTac® HPL USB pg. 97

ProTac HL® USB pg. 97

PolyTac® 1X pg. 99

PolyTac® X pg. 100

PolyTac 90° X pg. 101

PolyTac® pg. 101

// SIDEWINDER® SERIES



Sidewinder Stalk® pg. 104

Sidewinder® X pg. 106

Sidewinder Boot® pg. 108

Sidewinder Compact® III pg. 108

// RECHARGEABLE BATTERY PACK



SL-B9® Battery Pack pg. 63

SL-B26® Battery Pack pg. 103

SL-B50® Battery Pack pg. 102



SpeedLocker® pg. 70

// WEDGE® SERIES



Wedge® pg. 88

Wedge® XT pg. 89

Wedge® SL pg. 89



STINGER[®] SERIES

STINGER[®] 2020



Rechargeable, high-lumen flashlight with mode selector switch

- Dual power switches and intuitive mode selector switch (as shown in the image below) for ease of use
- Multiple charging options; recharges in 8 hours
- Anti-roll design

	HIGH	MEDIUM	LOW
LUMENS	2,000	850	100
CANDELA	25,000	10,000	1,200
DISTANCE	315m	200m	70m
RUN TIME	2 hrs	4 hrs	24 hrs
Strobe runs 3.25 hours			



Description	Item #
Stinger 2020 - 120V AC/12V DC - 1 holder - Black	78101
Stinger 2020 - 120V AC/12V DC - 1 holder - Red	78121
Stinger 2020 - 120V AC/12V DC - 1 holder - Blue	78131
Stinger 2020 - 12V DC - 1 holder - Black	78104
Stinger 2020 - Light only - Includes "Y" USB cord - Black	78100
Stinger 2020 - Light only - Includes "Y" USB cord - Red	78120
Stinger 2020 - Light only - Includes "Y" USB cord - Blue	78130

Size and Weight	Battery
7.67" (19.48 cm); 12.3 oz (350g)	(2) SL-B26 battery packs



STINGER® 2020 S


IPX7

Multi-function flashlight with PiggyBack® charger option

- Intuitive mode selector switch (as shown in blue image below) for ease of use
- Stinger 2020 S uses a protected li-ion rechargeable battery pack
- PiggyBack charger allows you to charge your light and a second battery pack simultaneously

	HIGH	MEDIUM	LOW
LUMENS	2,000	850	100
CANDELA	25,000	10,000	1,200
DISTANCE	315m	200m	70m
RUN TIME	2 hrs	4 hrs	24 hrs

Strobe runs 3.25 hours




2000
LUMENS

Description	Item #
Stinger 2020 S - 120V AC/12V DC - PiggyBack - Black	78201
Stinger 2020 S - 120V AC/12V DC - PiggyBack - Red	78221
Stinger 2020 S - 120V AC/12V DC - PiggyBack - Blue	78231
Stinger 2020 S - 120V AC/12V DC - 1 holder - Black	78202
Stinger 2020 S - Light only - Black	78200
Stinger 2020 S - Light only - Red	78220
Stinger 2020 S - Light only - Blue	78230

Size and Weight	Battery
7.69" (19.53 cm); 12.2 oz (346g)	Lithium-ion



STINGER LED HL[®] // STINGER DS LED HL[®]



High-lumen, flashlight provides maximum illumination

- Wide beam pattern gives you a bright flood light
- High, medium, low and strobe modes; recharges in 4.5 hours
- DS model provides both a tailcap and head switch

	HIGH	MEDIUM	LOW
LUMENS	800	400	200
CANDELA	24,000	12,000	6,000
DISTANCE	310m	219m	155m
RUN TIME	1.5 hrs	2.5 hrs	5 hrs

Strobe runs 3 hours



Description	LED HL	DS LED HL
120V AC/12V DC - 2 holders - Black	75430	75454
120V AC - Black	75431	75455
12V DC - Black	75432	75456
120V AC/12V DC PiggyBack - Black	75434	75458
Light Only - Black	75429	75453

Size and Weight	Battery
LED HL: 8.41" (21.36 cm); 12.4 oz (352g) // DS LED HL: 8.85" (22.48 cm); 12.8 oz (364g)	NiMH

STINGER[®] COLOR-RITE[®]




Rechargeable flashlight featuring Streamlight's Color-Rite Technology[®]

- Provides warm white light that produces a natural balance of color
- 90 CRI LED for true color recognition of wire colors, paint and fine details
- Multi-function, push-button switch: high, medium, low or strobe

	HIGH	MEDIUM	LOW
LUMENS	500	275	140
CANDELA	17,500	9,000	4,500
DISTANCE	265m	190m	134m
RUN TIME	1.5 hrs	2.5 hrs	5 hrs

Strobe runs 3 hours / Color Temperature: 3,000k

**Color-
Rite[®]**

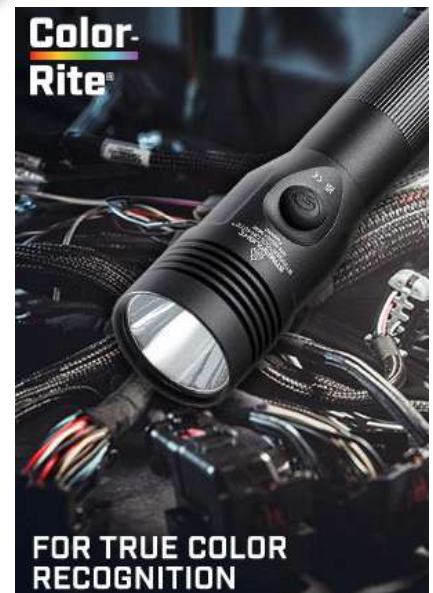

Description	Item #
Stinger Color-Rite - 120V/100V AC - Black	75499
Stinger Color-Rite - 120V/100V AC - PiggyBack - Black	75502
Stinger Color-Rite - Light Only - Black	75498

Size and Weight	Battery
8.41" (21.36 cm); 12.4 oz (352g)	NiMH

STINGER® HPL // STINGER DS® HPL



IPX4

Long-range flashlight produces an intense spot beam for illuminating objects at a distance

- Powerful beam configurations
- High, medium, low and strobe modes
- DS model provides both a tailcap and head switch

	HIGH	MEDIUM	LOW
LUMENS	800	400	200
CANDELA	48,000	24,000	12,000
DISTANCE	438m	310m	219m
RUN TIME	1.5 hrs	2.5 hrs	5 hrs

Strobe runs 3 hours

Description	HPL	DS HPL
120V AC/12V DC - 2 holders - Black	75763	75863
120V AC - Black	75761	75861
12V DC - Black	75799	75899
120V AC/12V DC PiggyBack - Black	75782	75882
Light Only - Black	75980	75900

Size and Weight	Battery
HPL: 9.23" (23.44 cm); 13.6 oz (385g) // DS HPL: 9.65" (24.51 cm); 14 oz (396g)	NiMH



STINGER® LED // STINGER DS® LED



IPX4

Rugged, rechargeable flashlight built for maximum versatility

- Optimal balance of performance and value
- High, medium, low and strobe modes
- DS model provides both a tailcap and head switch

	HIGH	MEDIUM	LOW
LUMENS	425	200	100
CANDELA	26,000	12,000	6,000
DISTANCE	322m	219m	155m
RUN TIME	3 hrs	5.5 hrs	10 hrs

Strobe runs 7.5 hours

Description	LED	DS LED
120V AC/12V DC - 2 holders - Black	75713	75813
120V AC - Black	75711	75811
12V DC - Black	75712	75812
120V AC/12V DC PiggyBack - Black	75732	75832
Light Only - Black	75710	75810

Size and Weight	Battery
LED: 8.41" (21.36 cm); 12.4 oz (352g) // DS LED: 8.85" (22.48 cm); 12.8 oz (364g)	NiMH





POLYSTINGER® LED HAZ-LO®



IPX4

Durable, safety-rated, rechargeable flashlight

- Unbreakable, scratch-resistant polycarbonate lens
- Non-conductive, corrosion-resistant body
- Developed for petrochemical and heavy industrial applications with hazardous atmospheres

	HIGH	LOW
LUMENS	260	80
CANDELA	16,000	5,700
DISTANCE	253m	151m
RUN TIME	5 hrs	16 hrs

Moonlight mode runs 20 days



Description	Yellow	Black
PolyStinger LED HAZ-LO - 120V AC /12V DC	76412	76442
PolyStinger LED HAZ-LO - 12V DC	76411	76441
PolyStinger LED HAZ-LO - Light Only	76410	76440

Size and Weight	Battery
10.2" (25.9 cm); 13.5 oz (382g)	NiMH



Class I, II, Div. 1, Groups C, D, F, G;
Class III, 138°C (T3C)
Non-Incendive: Class I, Div. 2
Groups A, B, C, D

POLYSTINGER® LED



IPX4

All-purpose, polymer flashlight designed for the broadest range of lighting needs at the best value

- Unbreakable, scratch-resistant polycarbonate lens
- Four lighting modes: high, medium, low and strobe
- Non-conductive, super-tough nylon polymer with rubberized grip
- DS model provides both a tailcap and head switch

	HIGH	MEDIUM	LOW
LUMENS	485	240	120
CANDELA	28,000	14,000	7,000
DISTANCE	335m	237m	167m
RUN TIME	3 hrs	5.5 hrs	10 hrs

Strobe runs 7.5 hours

Description	LED	DS LED
120V AC/12V DC - 2 Holders - Yellow	76163	---
120V AC/12V DC - 2 Holders - Black	76113	76813
120V AC - Yellow	76161	---
120V AC - Black	76111	76811
12V DC - Yellow	76162	---
12V DC - Black	76112	76812
120V AC/12V DC PiggyBack - Yellow	76182	---
120V AC/12V DC PiggyBack - Black	76132	76832
Light Only - Yellow	76160	---
Light Only - Black	76110	76810

Size and Weight	Battery
LED: 8.07" (20.5 cm); 11.5 oz (326g) // DS LED: 8.64" (21.95 cm); 11.9 oz (338g)	NiMH



ULTRASTINGER® LED



IPX4

High-lumen, full size flashlight with superior down-range performance

- High, medium, low and strobes modes
- Durable, anodized aluminum body with non-slip rubberized comfort grip
- TEN-TAP® Programmable

	HIGH	MEDIUM	LOW
LUMENS	1,100	350	90
CANDELA	65,000	21,000	5,000
DISTANCE	510m	290m	141m
RUN TIME	1.5 hrs	4.5 hrs	16 hrs

Strobe runs 3.25 hours





Description	Item #
UltraStinger LED - 120V/12V AC/DC - 2 holders - Black	77553
UltraStinger LED - 120V/12V AC/DC - Black	77551
UltraStinger LED - 12V DC - Black	77555
UltraStinger LED - Light Only - Black	77550

Size and Weight	Battery
11.82" (30 cm); 19.9 oz (564g)	NiMH



STINGER® ACCESSORIES

DESCRIPTION	ITEM #	STINGER 2020	STINGER 2020 S	STINGER COLOR-RITE	STINGER LED HL // DS LED HL	STINGER HPL // DS HPL	STINGER LED // DS LED	ULTRASTINGER LED	POLYSTINGER LED HAZ-LO	POLYSTINGER LED // DS LED
5-Unit Bank Charger	75400	✓	✓	✓	✓	✓	✓	✓	✓	✓
8-Unit SL-B26 Bank Charger - 120V DC (For more information on SL-B26 Bank Charger, visit page 107)	22024	✓								
SL-B26 Battery Pack Charger Kit, USB (Includes (2) SL-B26 battery packs and USB cord)	22010	✓								
SL-B26 Battery Pack Charger Kit, 120V AC (Includes (2) SL-B26 battery packs and USB cord)	22011	✓								
Smart Charger	75105	✓	✓	✓	✓	✓	✓	✓	✓	✓
PiggyBack® Charger	78119		✓							
PiggyBack® Charger includes batteries	78204		✓							
Smart PiggyBack® Charger	75277			✓	✓	✓	✓			✓
Stinger 2020 S Battery Pack	78118		✓							
Li-Ion Battery Stick	75176			✓	✓	✓	✓			✓
NiMH Battery Stick	75375			✓	✓	✓	✓			✓
NiMH Battery Stick	76375								✓	
NiMH Battery Stick	77375							✓		
SL-B26 Battery Pack - 1pk (For more information on SL-B26 Battery Pack, visit page 107)	22101	✓								
SL-B26 Battery Carrier batteries included	78105	✓								
SL-B26 Battery Carrier batteries NOT included	78106	✓								
12V DC1 Charge Cord	22051	✓	✓	✓	✓	✓	✓	✓	✓	✓
12V DC2 Charge Cord	22050	✓	✓	✓	✓	✓	✓	✓	✓	✓
120V AC Charge Cord	22071	✓	✓	✓	✓	✓	✓	✓	✓	✓
"Y" USB Cord	22082	✓								
Stinger 2020 S Rear Door Kit	78205		✓							
Stinger 2020 S Service Kit	78206		✓							

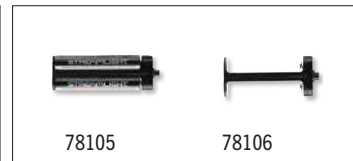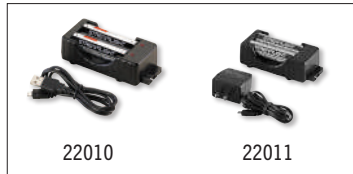

DESCRIPTION	ITEM #	STINGER 2020	STINGER 2020 S	STINGER COLOR-RITE	STINGER LED HL // DS LED HL	STINGER HPL // DS HPL	STINGER LED // DS LED	ULTRASTINGER LED	POLYSTINGER LED HAZ-LO	POLYSTINGER LED // DS LED
Stinger 2020 Switch Kit	78115	✓								
Stinger 2020 Rear Door Kit	78116	✓								
Stinger 2020 Service Kit	78117	✓								
Leather Plain Holster	75133				✓		✓			✓
Leather Weave Holster	78114	✓	✓							
Leather Weave Holster	75134				✓		✓			✓
Nylon Holster	75927			✓	✓	✓	✓			
Nylon Holster	75910									✓
Nylon Holster	78107	✓	✓							✓
Loop Nylon Holster	75928			✓	✓	✓	✓	✓	✓	✓
Duty Holster	88053			✓	✓	✓	✓	✓		
Ring Holder	75906			✓	✓	✓	✓	✓	✓	✓
Facecap Ring Kit	78113	✓	✓							
Red Flip Lens	75115	✓	✓	✓	✓		✓			
Blue Flip Lens	75116	✓	✓	✓	✓		✓			
Green Flip Lens	75117	✓	✓	✓	✓		✓			
IR Flip Lens	75027	✓	✓	✓	✓		✓			
Red Wand	75903	✓	✓	✓	✓		✓	✓		
Red Wand	75946					✓				
Red Wand	75933									✓
White Wand	75908	✓	✓	✓	✓		✓			✓
Blue Wand	75902	✓	✓	✓	✓		✓			
Yellow Wand	75904	✓	✓	✓	✓		✓	✓		
Yellow Wand	75934									✓
Glow in the Dark Wand	75913	✓	✓	✓	✓		✓	✓		
Glow in the Dark Wand	75950					✓				
Glow in the Dark Wand	75943									✓





STRION® SERIES

STRION® 2020



Compact, high-lumen flashlight with intuitive mode selector switch

- Features independently functioning head and tail switches
- Works with existing Strion series chargers; recharges in 4.5 hours
- PiggyBack® charger option available (as shown below)

	HIGH	MEDIUM	LOW
LUMENS	1,200	460	120
CANDELA	28,000	10,000	3,000
DISTANCE	335m	200m	110m
RUN TIME	1.75 hrs	5.5 hrs	12 hrs

Strobe runs 3.5 hours



Description	Item #
Strion 2020 - 120V/100V AC - 1 Holder - Black	74431
Strion 2020 - 120V/100V AC - PiggyBack - Black	74435
Strion 2020 - 12V DC - Black	74434
Strion 2020 - Light Only - Black	74430

Size and Weight	Battery
6.33" (16.1 cm); 5.7 oz (161.6g)	Lithium-ion



Battery status indicator:
Green = Charged
Red = Needs to be charged



STRION LED HL® / STRION® DS HL



Delivers wide beam brightness that lights up a scene with dual switch option

- TEN-TAP® Programming
- Recharges in 3.5 hours
- DS model provides both a tailcap and head switch

HL	HIGH	MEDIUM	LOW
LUMENS	615	320	160
CANDELA	12,000	6,000	3,000
DISTANCE	219m	155m	110m
RUN TIME	1.25 hrs	2.5 hrs	4.5 hrs

Strobe runs 3 hours



DS HL	HIGH	MEDIUM	LOW
LUMENS	700	300	40
CANDELA	12,000	5,000	800
DISTANCE	219m	141m	57m
RUN TIME	1.25 hrs	3.5 hrs	24 hrs

Strobe runs 2.5 hours

Description	HL	DS HL
120V AC/12V DC - 2 Holders - Black	74752	74612
120V AC/12V DC - 1 Holder - Black	74751	74611
120V AC/12V DC - 1 Holder - Clam - Black	74755	74621
120V AC/12V DC PiggyBack - Black	74778	74619
120V AC - Black	74753	74613
120V AC - with Grip Ring - Black	74509	74620
12V DC - Black	74754	74614
Light Only - Black	74750	74610

Size and Weight	Battery
HL: 5.9" (14.9 cm); 5.2 oz (148g) // DS HL: 6.33" (16.1 cm); 5.4 oz (153g)	Lithium-ion

STRION® HPL / STRION® DS HPL



Compact duty light that produces a wide beam pattern with superior down-range performance

- TEN-TAP® Programming
- Recharges in 3.5 hours
- DS model provides both a tailcap and head switch

DS HPL	HIGH	MEDIUM	LOW
LUMENS	700	300	40
CANDELA	44,000	18,000	2,600
DISTANCE	420m	268m	102m
RUN TIME	1.25 hrs	3.5 hrs	24 hrs

Strobe runs 2.5 hours



HPL	HIGH	MEDIUM	LOW
LUMENS	615	320	160
CANDELA	40,000	20,000	10,000
DISTANCE	400m	283m	200m
RUN TIME	1.25 hrs	2.5 hrs	4.5 hrs

Strobe runs 3 hours

Description	HPL	DS HPL
120V AC/12V DC - 2 Holders - Black	74502	74812
120V AC/12V DC - 1 Holder - Black	74501	74811
120V AC/12V DC PiggyBack - Black	74536	74819
120V AC - Black	---	74813
12V DC - Black	74504	74814
Light Only - Black	74500	74810

Size and Weight	Battery
HPL: 7.1" (17.78 cm); 7.1 oz (202g) // DS HPL: 7.56" (19.2 cm); 6.9 oz (196g)	Lithium-ion

STRION® LED // STRION® DS



Compact, high performance flashlight that provides good beam distance, peripheral light and long lasting power - all at one exceptional value

- Recharges in 3.5 hours
- High, medium, low and strobe modes
- DS model provides both a tailcap and head switch



LED	HIGH	MEDIUM	LOW
LUMENS	375	175	80
CANDELA	12,000	6,500	3,200
DISTANCE	219m	161m	113m
RUN TIME	2.5 hrs	4.75 hrs	9.5 hrs

Strobe runs 6.5 hours

Description	LED	DS
120V AC/12V DC - 2 Holders - Black	74302	74412
120V AC/12V DC - 1 Holder - Black	74301	74411
120V AC/12V DC PiggyBack - Black	74353	74419
120V AC - Black	74303	74413
120V AC - with Grip Ring - Black	74309	74420
12V DC - Black	74304	74414
Light Only - Black	74300	74410

ds	HIGH	MEDIUM	LOW
LUMENS	375	150	40
CANDELA	12,000	5,000	1,300
DISTANCE	219m	141m	72m
RUN TIME	2.5 hrs	6.25 hrs	24 hrs


Strobe runs 5 hours

Size and Weight	Battery
LED: 5.9" (14.99 cm); 5.2 oz (148g) // DS: 6.4" (16.26 cm); 5.4 oz (153g)	Lithium-ion



STRION® ACCESSORIES

DESCRIPTION	ITEM #	STRION LED HL / STRION DS LED HL	STRION HPL/ STRION DS HPL	STRION LED / STRION DS	STRION 2020
6-Unit Bank Charger - 120V	74400	√	√	√	√
6-Unit Bank Charger - 12V DC	74401	√	√	√	√
PiggyBack® Charger	74115	√	√	√	√
Charger Holder	74102	√	√	√	√
Lithium-ion Battery	74436	√	√	√	√
Li-ion Battery Stick	74175	√	√	√	√
12V DC1 Charge Cord	22051	√	√	√	√
12V DC2 Charge Cord	22050	√	√	√	√
120V AC Charge Cord	22071	√	√	√	√
Rail Mount	74200	√	√	√	√
Vertical Grip	69114	√	√	√	√
Leather Plain Holster	74059	√		√	√
Leather Weave Holster	74060	√		√	√
Nylon Holster	85905	√		√	√
Tactical Holster	88051	√	√	√	√
Red Flip Lens	85115	√		√	√
Green Flip Lens	85117	√		√	√
Blue Flip Lens	85116	√		√	√
Red Wand	74903	√		√	√
Red Wand	75946		√		
Yellow Wand	74904	√		√	√
Glow in the Dark Wand	74913	√		√	√
Glow in the Dark Wand	75950		√		

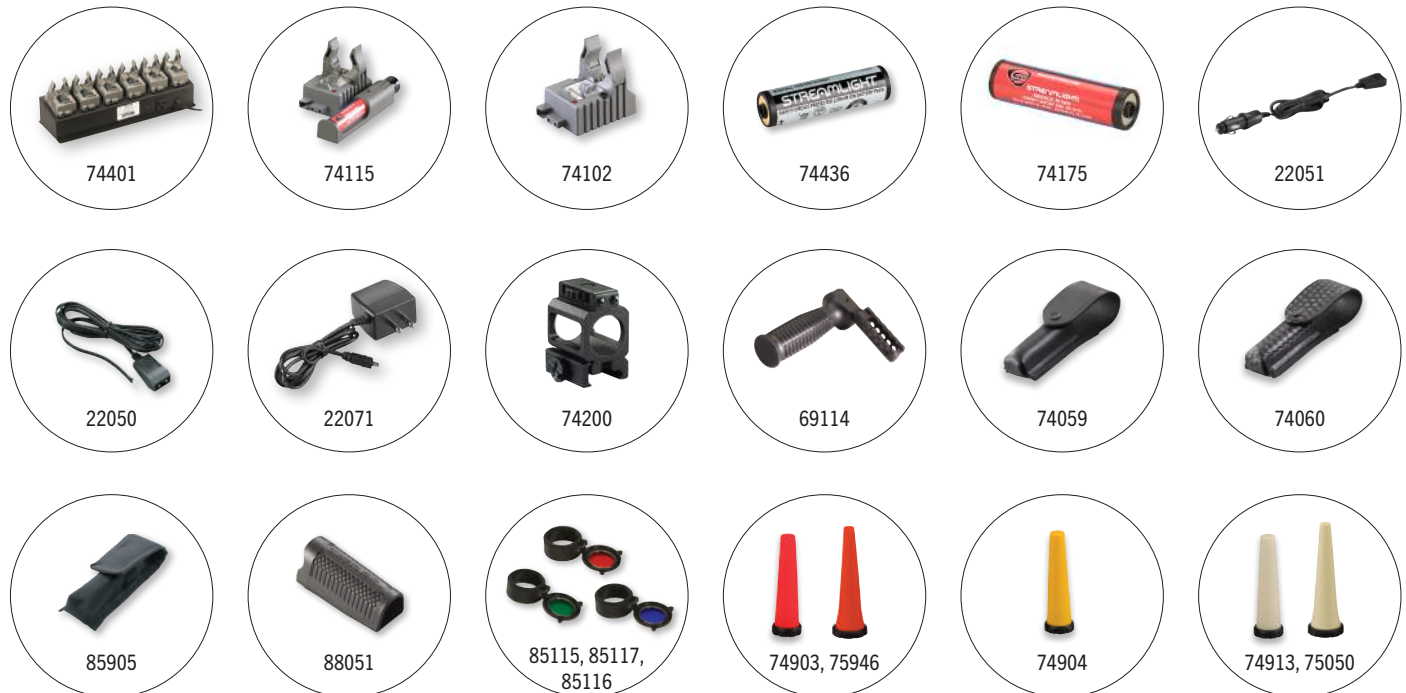



SL[®] SERIES

SL-20L[®]



Full size, professional grade, rechargeable, aluminum flashlight

- Tight beam for down range visibility
- Illuminated switch housing shows charge status; recharges in 9 hours
- Multi-function push-button switch

	HIGH	MEDIUM	LOW
LUMENS	450	225	60
CANDELA	70,000	35,000	9,000
DISTANCE	529m	374m	189m
RUN TIME	3.25 hrs	5 hrs	20 hrs

Strobe runs 4.5 hours



Description	Item #
SL-20L - 120V AC/12V DC - 2 sleeves - Black	20703
SL-20L - 120V AC - Black	20701
SL-20L - 12V DC - Black	20702
SL-20L - Light Only - Black	20700

Size and Weight	Battery
13.1" (33.3 cm); 1.7 lbs (770g)	NiMH

SL-20LP[®]



IPX4

Full size, professional grade, rechargeable, polymer flashlight

- Deep-dish parabolic reflector produces a tight beam
- Illuminated switch housing shows charge status; recharges in 4.5 hours
- Non-slip rubber comfort grip

	HIGH	MEDIUM	LOW
LUMENS	450	225	60
CANDELA	70,000	35,000	9,000
DISTANCE	529m	374m	189m
RUN TIME	3.25 hrs	5 hrs	20 hrs

Strobe runs 4.5 hours



Description	Item #
SL-20LP - 120V AC/12V DC - 2 sleeves - Yellow	25323
SL-20LP - 120V AC/12V DC - 2 sleeves - Black	25303
SL-20LP - 120V AC/12V DC - 2 sleeves - Orange	25313
SL-20LP - 120V AC - Yellow	25321
SL-20LP - 120V AC - Black	25301
SL-20LP - 120V AC - Orange	25311
SL-20LP - 12V DC - Yellow	25322
SL-20LP - 12V DC - Black	25302
SL-20LP - 12V DC - Orange	25312
SL-20LP - Light Only - Yellow	25320
SL-20LP - Light Only - Black	25300
SL-20LP - Light Only - Orange	25310

Size and Weight	Battery
13.2" (33.5 cm); 1.3 lbs (590g)	NiMH



SL-20L[®] / SL-20LP[®] ACCESSORIES

DESCRIPTION	ITEM #	SL-20L	SL-20LP
5-Unit Bank Charger - 120V AC	21400	√	√
5-Unit Bank Charger - 12V DC	21401	√	√
Charge Sleeve	22047	√	√
DC2 Direct Wire Charge Cord	22050	√	√
DC1 Charge Cord	22051	√	√
120V AC Charge Cord	22060	√	√
NiMH Battery Stick	77375	√	√
Nylon Holster	25090	√	√
Red Wand	22511	√	√
Glow in the Dark Wand	22513	√	√
Yellow Wand	22519	√	√



// COLOR-RITE TECHNOLOGY®

// WHAT IS COLOR-RITE TECHNOLOGY?

Color-Rite Technology is based on the Color Rendering Index (CRI) - a scale from 0-100 that indicates how a light source reflects color variations as they appear to the human eye. The higher the CRI, the more vibrant the colors appear. On the scale, lights that measure 90+ are considered “high” CRI lights and are critical for tasks requiring the most accurate color discrimination. A perfect 100 would enable us to see colors as they appear in natural sunlight.

// WHY STREAMLIGHT COLOR-RITE TECHNOLOGY?

Flashlights equipped with Streamlight’s proprietary Color-Rite Technology allow users to see the color spectrum as they would in natural light. While a standard high-lumen LED light produces an ultra-bright white beam that is needed in many applications, it prevents seeing subtle color differences in, for example, auto body paint colors or electrical wiring. In contrast, a high CRI light provides a softer, warmer beam to prevent color “washout,” allowing the user to see specific colors or imperfections and subtle details, regardless of the task.

// COLOR-RITE® APPLICATIONS FOR EVERY SITUATION

Streamlight offers a family of Color-Rite® lights for situations that require detailed inspections or color differentiation. For markets as diverse as automotive, industrial, law enforcement, military and even outdoor recreation, we have developed high CRI lights with Color-Rite Technology® for a wide variety of tasks that require exacting attention to detail. From repairing electrical wires to inspecting paint finishes or examining forensic evidence, count on Streamlight’s Color-Rite® products help get the job done efficiently and safely.

Our family of Color-Rite® products include the following:



STINGER® COLOR-RITE®

Rechargeable, warm white (3,000K)
90 CRI LED with Streamlight’s
Color-Rite Technology



DUALIE® 3AA COLOR-RITE®

Intrinsically-safe multi-function dual beam flashlight with
a cool white LED and a warm white (4,000K) 90 CRI LED
with Streamlight’s Color-Rite Technology



STINGER SWITCHBLADE®

Five lights in one:
Drop Light | Hands-Free | White Light |
Color-Rite Light (4,000K) | UV Light



STRION SWITCHBLADE®

Five lights in one:
Drop Light | Hands-Free | White Light |
Color-Rite Light (4,000K) | UV Light



SYCLONE®

Ultra-compact work light with a cool white LED and a
warm white (4,000K) 90 CRI LED with Streamlight’s
Color-Rite Technology



FLIPMATE®

Compact work light with cool white LEDs and warm
white (4,000K) 90 CRI LEDs with Streamlight’s Color-Rite
Technology - each with high and low modes

// A LIGHT FOR EVERY SITUATION

// COLOR-RITE® APPLICATIONS BY MARKET

LAW ENFORCEMENT/MILITARY

- **Improve tracking in low-light conditions.** High CRI lights like the Stinger® Color-Rite® help border patrol and other law enforcement agencies reveal subtle details of tracks and other markings that white LEDs with their bright “hot spots” can miss.
- **Detect trace evidence.** Forensic teams can more clearly spot fingerprints, fibers and other trace evidence on glass and other slick surfaces with high CRI lights such as the Stinger Color-Rite.
- **Enhance visualization.** High CRI lights can help cut through murky lake or ocean water, thick smoke or fog, and even heavy dust when pursuing vehicles in rough terrain.

AUTOMOTIVE

- **Match and identify colors.** The Dualie® 3AA Color-Rite®, Stinger Switchblade®, Syclone® and Strion Switchblade® are ideal for color matching and identifying body imperfections before and after paint repairs.
- **Identify defects.** Paint defects such as swirl marks and color sanding scratches are easily identifiable with high CRI LEDs.
- **Distinguish colors.** When troubleshooting electrical short circuits or other motor vehicle repairs, high CRI lights assist in differentiating colored wires in hard-to-see areas under a hood or carriage.
- **Reduce glare when working in tight spaces.** Because high CRI LEDs reflect back less light than bright white LEDs, mechanics can see greater detail when working in dark, hard-to-reach places underneath a car or under the hood.

INDUSTRIAL


- **Differentiate wire colors in electrical panels.** In plants and other facilities, high CRI lights like the Dualie® 3AA Color-Rite® and Syclone® provide better color contrast of intricate wires in electrical cabinets, helping technicians to work more efficiently.
- **Spot imperfections.** High CRI lights allow for contrast of color to identify imperfections in finish inspections of products including parts.
- **Reduce eye fatigue.** The soft lighting of high CRI LEDs reduces eye strain and fatigue for many users.

FIRE/RESCUE/EMS

- When responding to fires, accidents or other events under low light conditions, high CRI area lights such as the Dualie® 3AA Color-Rite®, Stinger Switchblade® and Stinger® Color-Rite® can be essential tools, permitting first responders to see the color spectrum as they would in natural daylight.
- High CRI lights allow investigators to see specific colors, imperfections and subtle details when examining fire or accident scenes and gathering evidence.

OUTDOOR RECREATION

- **Identify blood trails.** State-of-the-art blood trailing technology in high CRI lights, such as the Stinger® Color-Rite®, reduces certain colors in the spectrum to better amplify blood trails.
- **Visualize in low-light conditions.** Hikers and other outdoor enthusiasts use high CRI lights like the Dualie® 3AA Color-Rite® to better see obstacles when navigating trails at night and under other low-light conditions.

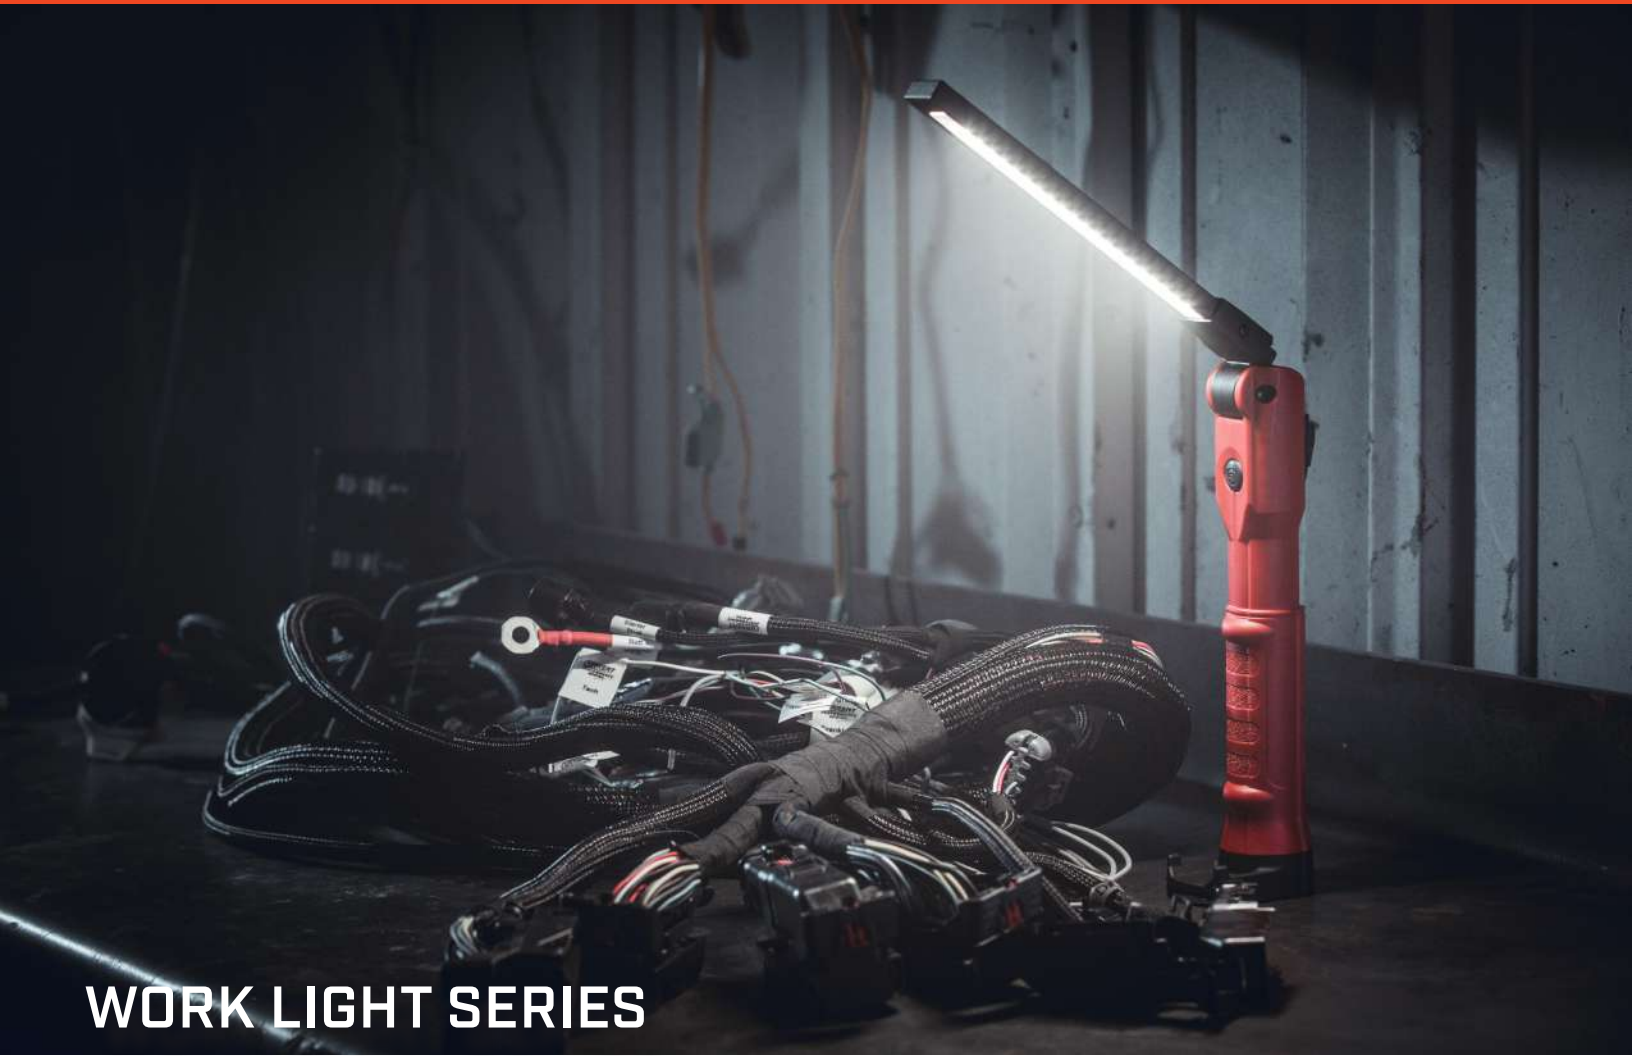

WORK LIGHT SERIES

STINGER SWITCHBLADE®



Color-Rite®

180° articulating, multi-function light bar

- Five Lights in One: droplight, hands-free light, bright white light, high CRI light with Streamlight's Color-Rite Technology® and UV light
- Recharges in 6.25 hours
- Ultra thin design fits in tight spaces and folds in half for storage



	COOL WHITE	HIGH CRI (90)	UV LED
LUMENS	800	600	500 mW
RUN TIME	3.75 hrs	3.75 hrs	15 hrs

Description	Item #
Stinger Switchblade - 120V/100V AC - 1 holder - Red	76801
Stinger Switchblade - with USB cord - Red	76800

Size and Weight	Battery
Folded - 9.8" (24.89 cm); Extended - 17" (43.18 cm); 17.1 oz (485g)	Lithium-ion



STRION SWITCHBLADE®



IPX4

Compact, rechargeable, 180° articulating, multi-function light bar

- Five Lights in One: droplight, hands-free light, bright white light, high CRI light with Streamlight's Color-Rite Technology® and UV light
- PiggyBack® charger option for extra battery, ready to replace and use whenever you need it
- Lithium-ion battery recharges in 4 hours



Color-Rite®

	COOL WHITE	HIGH CRI (90)	UV LED
LUMENS	500	400	500 mW
RUN TIME	3 hrs	3 hrs	5 hrs

Description	Item #
Strion Switchblade - with USB cord - Red	74850
Strion Switchblade - 120V/100V AC - 1 holder - Red	74851
Strion Switchblade - 120V/100V AC PiggyBack - Red	74854

Size and Weight	Battery
Folded - 6" (15.24 cm); Extended - 10.75" (27.3 cm); 6.4 oz (181g)	Lithium-ion



SYCLONE® JR.



Ultra-compact work light with a cool white LED for everyday use

- Head swivels 360° to aim it where you need it, adjustable with one hand
- Multi-function, push-button switch with charge indicator - charges in 4.5 hours
- Go hands-free with the flat, magnetic base and stowable hook



	HIGH	LOW
LUMENS	210	85
DISTANCE	79m	49m
RUN TIME	3.75 hrs	8.5 hrs



Hands-free applications: 1.) Magnetic base 2.) Stowable hang hook

Description	Item #
Syclone Jr. - Includes USB cord - Red	61530

Size and Weight	Battery
2.04" (5.18 cm); 2 oz (57g)	Lithium polymer

SYCLONE®



Compact, rechargeable work light with Color-Rite Technology®

- Cool white light and 90 CRI LED - each with high, medium and low modes
- Hands-free options with the flat, magnetic base and stowable hang hook
- Head swivels 360° to aim the beam



Spot/Cool White	HIGH	MEDIUM	LOW
LUMENS	400	200	100
DISTANCE	141m	95m	72m
RUN TIME	2 hrs	4.5 hrs	9.5 hrs

Flood/90 CRI	HIGH	MEDIUM	LOW
LUMENS	300	150	75
DISTANCE	48m	35m	24m
RUN TIME	2 hrs	4 hrs	8 hrs

Color Temperature 4,000K



Description	Item #
Syclone - Includes USB cord - Red	61510

Size and Weight	Battery
2.97" (7.54 cm); 5.3 oz (150g)	Lithium polymer

FLIPMATE®



Work light featuring a 270° rotating light bar

- Double function light bar with 90 CRI LEDs and cool white LEDs
- Go hands-free with the magnetic base, stowable hang hook or flat, stable bottom for standing on its own
- USB rechargeable; recharges in 4.5 hours

	COOL WHITE		90 CRI	
	HIGH	LOW	HIGH	LOW
LUMENS	500	250	400	200
RUN TIME	4 hrs	5.75 hrs	4 hrs	6 hrs

Color Temperature 4,000k



Description	Item #
FlipMate - Includes USB cord - Black	61500
FlipMate - Includes USB cord - Red	61501
FlipMate - Includes USB cord - Blue	61502

Size and Weight	Battery
Folded: 4.58" (11.63 cm) // Extended: 7.94" (20.17); 8.7 oz (247g)	Lithium-ion

BEARTRAP® 360



IPX4

Rechargeable work light with 360° rotating body that pivots 270°

- Produces bright white light in both spot and flood modes
- Go hands-free - clamp it or use its magnetic base
- Will continue to charge while plugged in and in use

	SPOT			FLOOD		
	HIGH	MEDIUM	LOW	HIGH	MEDIUM	LOW
LUMENS	1,000	450	325	2,000	1,000	575
CANDELA	7,500	3,600	2,500	1,200	680	360
DISTANCE	174m	120m	100m	69m	52m	38m
RUN TIME	4.5 hrs	8.75 hrs	12.5 hrs	2.5 hrs	5 hrs	8.75 hrs


Description	Item #
BearTrap 360 - 120V/100V AC - Red	61523

Size and Weight	Battery
7.62" (19.35 cm); 2 lbs 5 oz (1049g)	Lithium-ion



WORK LIGHT ACCESSORIES

DESCRIPTION	ITEM #	BEARTRAP 360	STRION SWITCHBLADE	STINGER SWITCHBLADE	FLIPMATE	SYCLONE	SYCLONE JR.
Stinger 6 Unit Bank Charger 120V	75400			√			
Strion 6 Unit Bank Charger 12V	74401		√				
Strion 6 Unit Bank Charger 120V	74400		√				
PiggyBack® Charger *batteries and cord sold separately	74115		√				
Smart Charger Holder *cord sold separately	75105			√			
Charger Holder *cord sold separately	74102		√				
Lithium-ion Battery - BearTrap360	61522	√					
Battery Stick - Lithium-ion	74175		√				
Stinger Switchblade Battery	76805			√			
12V DC Adapter	44923	√					
120V USB Charge Cord	22060		√	√			
12V DC1 Charge Cord	22051		√	√			
12V DC2 Charge Cord	22050		√	√			
40" USB Cord	22070		√	√	√	√	√
22" USB Cord	22081		√	√	√	√	√
120V AC USB Charge Cord	22071			√			
120V AC BearTrap Cord	44922	√					

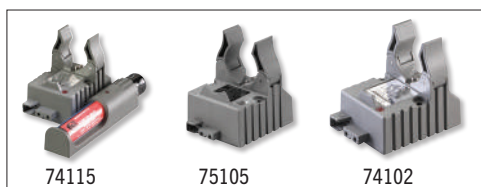

PORTABLE SCENE LIGHT SERIES

PORTABLE SCENE LIGHT



Portable and collapsible flood light with extreme brightness

- 90° swivel neck shines light to out-of-the-way places
- Extends to full height within seconds
- Designed to adapt to tight space, rugged enough to withstand rough terrain and resists 40 mph winds

	HIGH	MEDIUM	LOW
LUMENS	10,000	5,300	2,000
CANDELA	95,000	49,500	22,450
DISTANCE	616m	445m	300m
RUN TIME	2 hrs	4 hrs	12 hrs



Description	Item #
Portable Scene Light - 120V AC/12V DC - Yellow	45670
Portable Scene Light EXT - 120V AC/12V DC - Yellow	45680

Size and Weight	Battery
22.5" (57.2 cm); 25.8 lbs (11.7kg) EXT: 25.5" (64.8 cm); 26.3 lbs (11.9kg)	Zero-maintenance, sealed lead acid; or 12V DC power cord

PORTABLE SCENE LIGHT II



Cordless, compact scene light enhances safety at your work site by eliminating trip hazards

- 360° rotating head directs the light where you need it; stackable for "light tower" capability
- 18 LEDs provide 10,000 lumens to light up an entire scene
- Hooked feet for hanging over doors, guard rails, fences, etc.



	100%	80%	60%	40%	20%
LUMENS	10,000	8,300	6,300	4,500	2,300
RUN TIME	2 hrs	2.75 hrs	3.75 hrs	5.75 hrs	11 hrs



Description	Item #
Portable Scene Light II - 120V/12V DC - Red	46000

Size and Weight	Battery
16" (40.6 cm); 15.56 lbs (7.06kg)	Lithium-ion

NEW

PORTABLE SCENE LIGHT III



NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

PORTABLE SCENE LIGHT III



Rugged, all-weather scene light delivering powerful, high-lumen, 360° adjustable 12-LED illumination for complete scene coverage

- IPX7-rated with swappable battery installed for reliable performance in wet conditions
- Wireless remote control (up to ~75 feet) with multi-light pairing for seamless operation
- Modular design with swappable battery packs, multiple power options, and 7.7 foot heavy-duty tripod for versatile indoor and outdoor use

	HIGH	MEDIUM	LOW
LUMENS	10,000	5,000	2,500
CANDELA	121,000	61,000	28,000
DISTANCE	696m	494m	390m
RUN TIME	2 hrs	4 hrs	8 hrs

Description	Item #
Portable Scene Light III - Light Head Only - 120V AC/12V DC - Includes (1) SL-P6™ battery, (1) SL-P6 battery charger, (1) 120V AC cord/power supply and (1) 12V DC cord - Black	46100
Portable Scene Light III - Tripod System - 120V AC/12V DC - Includes tripod, (2) SL-P6™ batteries, (1) wireless remote, (1) SL-P6 battery charger, (2) 120V AC cord/power supplies and (1) 12V DC cord - Black	46105

Size	Weight	Battery
Head: 7.5" (19.1 cm); Tripod Collapsed: 37.7" (95.8 cm) Tripod Extended: 92" (233.7 cm)	Head: 7.5 lbs (3.4kg) Tripod: 13.3 lbs (6kg) Total: 23.5 lbs (10.7kg)	(1) SL-P6™ lithium-ion battery pack





LANTERN SERIES

VULCAN CLUTCH®



Multi-function lantern with adjustable head and versatile clamping handle

- 340° articulating head aims the beam where you need it
- 20° downcast head for footpath lighting
- Flash mode for use as an exit marker/warning beacon
- Three white LEDs produce extreme brightness and two ultra-bright blue taillight LEDs provide visibility from behind


	HIGH	LOW
LUMENS	1,700	380
CANDELA	67,500	15,000
DISTANCE	520m	245m
RUN TIME	6.5 hrs	18 hrs

Flash runs 25 hours



Description	Item #
Vulcan Clutch - 120V/100V AC/12V DC - Includes quick release shoulder strap - Orange	44361
Vulcan Clutch - Vehicle Mount System - 12V DC - Includes quick release shoulder strap - Orange	44365
Vulcan Clutch - Light Only - Includes quick release shoulder strap - Orange	44360
Vulcan Clutch - 120V/100V AC/12V DC - Includes heavy duty shoulder strap - Yellow	44371
Vulcan Clutch - Vehicle Mount System - 12V DC - Includes heavy duty shoulder strap - Yellow	44375
Vulcan Clutch - Light Only - Includes heavy duty shoulder strap - Yellow	44370

Size and Weight	Battery
9.39" (23.85 cm); 2.84 lbs (1.288kg)	Lithium-ion

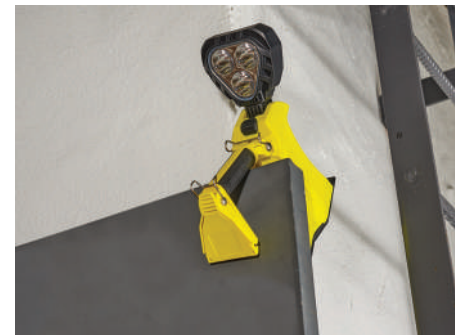

VULCAN® 180 HAZ-LO®

Portable lantern, developed for use in hazardous locations

- 180° tilting head for precise light direction (as shown in image below)
- Three LEDs provide extreme brightness along with two blue taillight LEDs for visibility from behind
- Rechargeable with battery status/ charge indicator; recharges in 16 hours



IP65

NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



Class I, II, III, Div. 1, Grps. A, B, C, D, E, F, G; Class I, Zone 0, Grps. IIC, Class III; T-Code: T4

	HIGH	LOW
LUMENS	450	130
CANDELA	25,000	8,000
DISTANCE	316m	179m
RUN TIME	14 hrs	30 hrs



Description	Yellow	Orange
Vulcan 180 HAZ-LO - Standard System - 120V AC/12V DC, Includes quick release shoulder strap	44321	44331
Vulcan 180 HAZ-LO - Vehicle Mount System - 12V DC, Includes quick release shoulder strap	44325	44335
Vulcan 180 HAZ-LO - Without Charger	44320	44330

Size and Weight	Battery
7.43" (18.87 cm); 2.45 lbs (1.111kg)	Lithium-ion

VULCAN® 180

Rechargeable, waterproof lantern with tilting head

- 180° articulating head directs the light where you need it
- Three LEDs provide extreme brightness along with two blue taillight LEDs for visibility from behind
- Battery status/ charge indicator; recharges in 11 hours



IP64



Class I, Div. 2, Grps. A, B, C, D; Class II, Div. 2, Grps. F, G; Class III; T-Class: T4

NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

	HIGH	LOW
LUMENS	1,200	350
CANDELA	75,000	22,000
DISTANCE	548m	296m
RUN TIME	7.25 hrs	19 hrs



Description	Yellow	Orange
Vulcan 180 - Standard System - 120V/100V AC/12V DC - Includes quick release strap	44307	44311
Vulcan 180 - Vehicle Mount System - 12V DC - Includes heavy duty shoulder strap	44305	44315
Vulcan 180 - Without Charger	44300	44310

Size and Weight	Battery
7.43" (18.8 cm); 2.47 lbs (1.12kg)	Lithium-ion

E-FLOOD® LITEBOX® // E-FLOOD® FIREBOX®



Lightweight lantern providing diffused area lighting

- 90° articulating head for precise beam direction
- Four LEDs with shallow reflectors for a widened beam pattern
- Recharges in 7 hours

	HIGH	LOW
LUMENS	1,500	350
CANDELA	4,700	1,000
DISTANCE	137m	63m
RUN TIME	8.5 hrs	20 hrs



NFPA Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

Description	Orange	Yellow
E-Flood LiteBox - 120V AC/12V DC - Includes shoulder strap and mounting rack	45801	45821
E-Flood LiteBox Vehicle Mount System - 12V DC - Includes shoulder strap	45805	45825
E-Flood LiteBox Power Failure System - 120V AC/12V DC - Includes mounting rack <small>Features "Smart" power failure circuitry which automatically illuminates the light when the power is lost</small>	45807	---
E-Flood LiteBox - Light Only	45806	45826
E-Flood FireBox - 120V AC/12V DC - Includes shoulder strap and mounting rack	45811	---
E-Flood FireBox Vehicle Mount System - 12V DC - Includes shoulder strap	45815	---
E-Flood FireBox - Light Only	45832	---

Size and Weight	Battery
11.2" (28.4 cm); 3.1 lbs (1.389kg)	Lithium-ion



E-SPOT® LITEBOX® // E-SPOT® FIREBOX®



Lightweight, high candela lantern with articulating head

- 90° swivel neck to aim the beam where you need it
- Four LEDs with deep parabolic reflectors for a long-range, spot beam pattern
- Recharges in 7 hours

	HIGH	LOW
LUMENS	1,500	350
CANDELA	110,000	25,000
DISTANCE	663m	316m
RUN TIME	8.5 hrs	20 hrs



NFPA Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

Description	Orange	Yellow
E-Spot LiteBox - 120V AC/12V DC - Includes shoulder strap and mounting rack	45851	45871
E-Spot LiteBox Vehicle Mount System - 12V DC - Includes shoulder strap	45855	45875
E-Spot LiteBox Power Failure System - 120V AC/12V DC - Includes mounting rack <small>Features "Smart" power failure circuitry which automatically illuminates the light when the power is lost.</small>	45857	--
E-Spot LiteBox - Light Only	45856	45876
E-Spot FireBox - 120V AC/12V DC - Includes shoulder strap and mounting rack	45861	---
E-Spot FireBox Vehicle Mount System - 12V DC - Includes shoulder strap	45865	---
E-Spot FireBox - Light Only	45862	---

Size and Weight	Battery
11.2" (28.4 cm); 3.1 lbs (1.389kg)	Lithium-ion

NEW

LITEBOX[®] 1MILLION[®]



Rugged, rechargeable high-intensity search and scene light delivering 1.25 million candela and a 1.39-mile beam to support fireground operations, search and rescue, storm response, and long-range scene illumination

- Articulating head pivots 135° and rotates 270°
- Intuitive integrated battery status indicator
- IPX4 water resistant design
- Fits existing Streamlight LiteBox chargers

	HIGH	LOW
LUMENS	3,300	525
CANDELA	1,250,000	200,000
DISTANCE	2,236m	894m
RUN TIME	4.5 hrs	22.5 hrs

Description	Item #
LiteBox 1Million - Standard System - 120V/100V AC/12V DC - Includes heavy duty shoulder strap and mounting rack - Orange	46201
LiteBox 1Million - Vehicle Mount System - 12V DC - Includes heavy duty shoulder strap and mounting rack - Orange	46203
LiteBox 1Million (Without Charger) - Includes heavy duty shoulder strap - Orange	46200

Size and Weight	Battery
12.5" (31.75 cm); 7 lbs (3.18kg)	Lithium-ion



NFPA Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position





FIRE VULCAN® LED



IPX7

Lightweight lantern with two ultra-bright blue taillight LEDs that floats

- Bright beam reaches long distances while still providing optimum peripheral illumination
- Toggle switch - easy to use with gloves
- Recharges in 5 hours

WHITE LED	HIGH	LOW
LUMENS	180	80
CANDELA	100,000	45,000
DISTANCE	662m	424m
RUN TIME	5 hrs	10 hrs



Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G;
Class III, T-Code: T4

NFPA

Charging rack meets requirements
of NFPA 1900-11.1.11.2 (2024)
mounted in any position

Description	Item #
Fire Vulcan LED - Standard System - 120V/100V AC/12V DC - Includes shoulder strap & rack - Orange	44450
Fire Vulcan LED - Vehicle Mount System - 12V DC - Includes direct wire rack, shoulder strap - Orange	44451
Fire Vulcan LED (Without Charger)	44454

Size and Weight	Battery
7.5" (19.05 cm); 1.85 lbs (839g)	Lithium-ion



LANTERN ACCESSORIES

DESCRIPTION	ITEM #	VULCAN 180	VULCAN 180 HAZ-LO	VULCAN CLUTCH	PORTABLE SCENE LIGHT	PORTABLE SCENE LIGHT II	PORTABLE SCENE LIGHT III	LITEBOX 1MILLION	LITEBOX/FIREBOX	FIRE VULCAN
Quick Release Strap	44050	√	√	√				√	√	√
Heavy Duty Strap	45232	√		√				√	√	√
Heavy Duty Strap w/Carabiner Lock	45677				√					
Standard Mounting Rack - Orange	45070							√	√	
Vehicle Mounting Rack - Orange	45071								√	
Vehicle Mounting Rack - Yellow	45074								√	
Standard Charging Rack - Black	44103									√
Vehicle Mounting Rack - Black	44132									√
Standard Charging Rack - Black	44350	√	√	√						
Direct Wire 12V Charge Kit - Black	44306	√		√						
12V DC (Car Socket) Charge Cord	22051	√		√				√	√	√
12V DC2 Charge Cord	22050	√		√				√	√	√
12V DC Charge Cord - 10' (3.048m)	22056				√	√	√			
120V AC Charge Cord	22060	√		√				√	√	√
Power Supply	22083				√	√				
PSL III Power Supply	22092						√			
120V AC Charge Cord	22074				√	√	√			
Battery (Sealed Lead Acid)	45630				√					
Battery (Lithium-ion)	44366			√				√		
Battery (Lithium-ion)	45938								√	
Battery (Lithium-ion)	44610									√
Battery (Lithium-ion)	44351	√								
Battery (Lithium-ion)	44353		√							
Battery (Lithium-ion)	46005					√				
SL-P6 Battery	20242						√			
SL-P6 Battery and Charger Kit	20243						√			
SL-P6 Series Charger	20244						√			
PSL III Remote	46110						√			
PSL III Tripod	46111						√			





WAYPOINT® SERIES

WAYPOINT® 400



IPX8



1400
LUMENS



Rechargeable spotlight for long range targeting

- Far reaching beam
- Integrated stand for hands-free lighting
- Rechargeable in 4 hours

Description	Item #
Waypoint 400 - 120V AC - Yellow	44910
Waypoint 400 - 120V AC - Black	44911

	HIGH	MEDIUM	LOW
LUMENS	1,400	600	38
CANDELA	400,000	165,000	10,000
DISTANCE	1,265m	812m	200m
RUN TIME	3.25 hrs	7.5 hrs	84 hrs

Size and Weight	Battery
6.75" (17.15 cm); 1.52 lbs (691g)	Lithium-ion

WAYPOINT®



IPX4

Alkaline powered spotlight for long range targeting

- Long distance, ultra-bright beam
- Integrated stand for hands-free lighting
- 12V DC power cord for unlimited run time (not a charge cord)

Description	Item #
Waypoint - Includes 12V DC power cord - Yellow	44900
Waypoint - Includes 12V DC power cord - Black	44902
Waypoint - Includes 12V DC power cord - Clam - Black	44905

	HIGH	LOW
LUMENS	750	60
CANDELA	150,000	12,000
DISTANCE	775m	219m
RUN TIME	10 hrs	92 hrs

12V DC Power Cord - Unlimited run time
Emergency Signal - Runs 82 hours



Size and Weight	Battery
6.75" (17.15 cm); 1.8 lbs (816g)	(4) C batteries (not included)



WAYPOINT® ACCESSORIES

DESCRIPTION	ITEM #	WAYPOINT 400	WAYPOINT
Polymer Storage Mount	44918	√	
Polymer Storage Mount	44908		√
120V AC Charge Cord	44909	√	
12V AC Power Cord	44923	√	
12V AC Power Cord	44903		√
Red Filter	44924		√
Green Filter	44925		√
Red Filter	44915	√	
Green Filter	44916	√	



44909



44923



44903



44918, 44908



44915, 44916



44924, 44925



SIEGE® SERIES

SUPER SIEGE®



Rechargeable lantern provides 360° of bright light that illuminates an entire area

- Easy, large button for turning off and on with battery status indicator
- Rechargeable - charges in 7 hours
- Auxiliary charger charges portable devices
- Glare Guard™ will shield light from behind for up-close task lighting

WHITE	HIGH	MEDIUM	LOW
LUMENS	1,100	550	125
RUN TIME	5.75 hrs	11.5 hrs	36.25 hrs
RED	HIGH	SOS	LOW
LUMENS	2.7	2.7	1
RUN TIME	140 hrs	320 hrs	348 hrs



A small dry storage area is provided in the light's base



Description	Item #
Super Siege - 120V AC - Coyote	44947
Super Siege - 120V AC - Yellow	44945

Size and Weight	Battery
7.5" (19.05 cm); 1 lb 14 oz (867.62g)	Lithium-ion

THE SIEGE®



Compact, alkaline battery powered hand lantern with ergonomic handle

- Spring loaded D-rings for hanging
- Battery indicator in switch
- Three white light settings, a red light for softer light and an SOS mode



WHITE	HIGH	MEDIUM	LOW
LUMENS	540	275	55
RUN TIME	30 hrs	70 hrs	295 hrs
RED	HIGH	SOS	
LUMENS	10	10	
RUN TIME	235 hrs	430 hrs	

Description	Item #
The Siege - Coyote	44931
Size and Weight	Battery
7.25" (18.41 cm); 1 lb 15 oz (878.83g)	(3) D batteries

SIEGE® AA



A rugged, compact lantern for when you need a lot of light without taking up a lot of space

- One white LED and two red LEDs; five output modes
- Spring loaded D-rings for hanging and ergonomic handle
- Battery indicator in switch



Features rugged carry handle and D-rings for hanging



WHITE	HIGH	MEDIUM	LOW
LUMENS	200	100	50
RUN TIME	7 hrs	15.5 hrs	37 hrs
RED	HIGH	SOS	
LUMENS	0.7	0.7	
RUN TIME	192 hrs	288 hrs	

Description	Item #
Siege AA - Coyote	44941
Siege AA - Yellow with Magnetic Base	44943
Size and Weight	Battery
5.44" (13.82 cm); 8.8 oz (249.47g) // 9.1 oz (257.98g) with Magnetic base	(3) AA alkaline batteries

SIEGE® ACCESSORIES

DESCRIPTION	ITEM #	SUPER SIEGE	THE SIEGE	SIEGE AA
Glare Guard™	44950	√	√	
Magnetic Accessory Base - Coyote	44942			√
Magnetic Accessory Base - Black	44951	√		
Magnetic Accessory Base - Black	44952		√	
120V AC Charge Cord	44909	√		



SURVIVOR[®] SERIES

SURVIVOR[®] X



Right angle, lightweight, low profile flashlight, that won't interfere with your gear

- Rubber dome push button switch is designed for easy operation
- Spring-loaded clip securely grabs onto belts and gear; D-ring provides forward-hanging orientation
- Battery indicator in switch: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery



	HIGH	LOW
LUMENS	250	60
CANDELA	50,000	14,000
DISTANCE	447m	237m
RUN TIME Lithium	3.75 hrs	15 hrs
RUN TIME Alkaline	5 hrs	15 hrs
Flash runs 8 hours		

Description	Orange	Yellow
Survivor X - 120V/100V AC/12V DC	90952	90962
Survivor X - Alkaline	90950	90960

Note: The Survivor X is not compatible with legacy Survivor chargers.

Size and Weight	Battery
7.06" (17.92 cm); Alkaline: 12.8 oz (363g) // Lithium: 12.2 oz (346g)	Rechargeable lithium-ion battery pack or (3) AA alkaline

NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



Class I, II, Div. 1, Grps. A, B, C, D, E, F, G; Class III, T-Code: T3/T4

NFPA

Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)

SURVIVOR[®] X USB



USB rechargeable, right-angle flashlight

- Rubber dome push button switch is designed for easy operation
- Spring-loaded clip securely grabs onto belts and gear; D-ring provides forward-hanging orientation
- Battery life indicator in switch: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery

	HIGH	LOW
LUMENS	250	60
CANDELA	50,000	14,000
DISTANCE	447m	237m
RUN TIME SL-B26	4 hrs	15 hrs
RUN TIME Alkaline	5 hrs	15 hrs
Flash runs 8 hours		

NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

NFPA

Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)



Class I, II, Div. 2, Grps. A, B, C, D, F, G; Class III, T-Code: T4

Description	Orange	Yellow
Survivor X USB - Includes (1) SL-B26 battery pack	90044	90244

Note: The Survivor X is not compatible with legacy Survivor chargers.

Size and Weight	Battery
7.06" (17.92 cm); Alkaline: 12.8 oz (363g) // SL-B26: 11.9 oz (337g)	SL-B26 battery pack or (3) AA alkaline



SURVIVOR[®]



Extremely durable right angle flashlight

- Push button switch for easy operation
- Unbreakable, scratch-resistant polycarbonate lens
- Four lighting modes including high, low, flash, and moonlight
- Features a D-ring for forward hanging orientation and a spring loaded clip that grabs onto your gear

	HIGH	LOW
LUMENS	175	60
CANDELA	41,000	14,000
DISTANCE	405m	237m
RUN TIME NiMH	3.5 hrs	13 hrs
RUN TIME Alkaline	4 hrs	15 hrs
Moonlight mode runs 20 days // Flash runs 8 hours		



Description	Orange	Yellow	Black
Survivor - 120V AC/12V DC	90503	90513	90523
Survivor - Without Charger	90500	90510	90520
Survivor - Alkaline	90540	90541	90545

Size and Weight	Battery
7.06" (17.92 cm); Alkaline: 13.7 oz (388g) NiMH: 18 oz (510g)	Rechargeable NiMH battery pack; also accepts (4) AA Alkaline batteries



Class I, II, Div. 1, Groups C, D, E, F, G;
Class I, Div. 2, Groups A, B, C, D;
Class III, T-Code: T4

NFPA

Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)

NFPA

Charger meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



Permissible Flashlight, Approval No. 20-A150001-0 (Alkaline model)

SURVIVOR PIVOT® // SURVIVOR PIVOT® USB



Multi-function, dual-beam flashlight with a 90° articulating head

- Spot beam uses a cool white, high-power LED for maximum distance illumination and flood beam is angled downward for area illumination
- Securely locks into charger with quick release latch for one-handed grab and go
- Translucent switch boot with integrated battery status indicator: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery



	SPOT		FLOOD		COMBO	
	HIGH	LOW	HIGH	LOW	HIGH	LOW
LUMENS	300	70	300	70	325	80
CANDELA	34,000	8,500	300	75	19,000	5,000
DISTANCE	369m	184m	35m	17m	276m	141m
RUN TIME Lithium	4.25 hrs	16 hrs	4.25 hrs	16 hrs	3.75 hrs	13 hrs
RUN TIME Alkaline	5.5 hrs	15 hrs	5.5 hrs	15 hrs	4.5 hrs	12 hrs



Survivor Pivot Safety Ratings



NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



Class I, II, Div. 1, Grps. A, B, C, D, E, F, G; Class III, T-Code: T3/T4

Survivor Pivot USB Safety Ratings

NFPA

Charger meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



Class I, II, Div. 2, Grps. A, B, C, D, E, F, G; Class III, T-Code: T4

Description	Orange	Yellow
Survivor Pivot - 120V/100V AC/12V DC	91802	91812
Survivor Pivot - Alkaline - Includes battery carrier	91800	91810
Survivor Pivot Magnet - 120V/100V AC/12V DC	91830	91831
Survivor Pivot Magnet - Alkaline - Includes battery carrier	91825	91826

Description	Orange	Yellow
Survivor Pivot USB - Includes 22" (55.88 cm) USB cord and battery carrier	91804	91814
Survivor Pivot USB Magnet - Includes 22" (55.88 cm) USB cord and battery carrier	91838	91839

Size and Weight

7.93" (20.14 cm);
Lithium-ion: 16.2 oz (459g) // Alkaline: 16.7 oz (473g)
Lithium-ion: 17.6 oz (499g) // Alkaline: 18.1 oz (513g) W/MAGNET

USB Model: 7.93" (20.14 cm)
USB Model: SL-B26: 15.8 oz (448g) // Alkaline: 16.7 oz (473g)
USB Model with Magnet: SL-B26: 17.2 oz (488g) // Alkaline: 18.1 oz (513g)

Battery

Rechargeable lithium-ion battery pack, SL-B26 or (3) AA alkaline

Note: The Survivor Pivot® is not compatible with legacy Survivor chargers





Strong spring-loaded clip securely grabs onto jackets and gear; D-ring provides forward hanging orientation



Optional magnet

SURVIVOR® ACCESSORIES

DESCRIPTION	ITEM #	SURVIVOR	SURVIVOR X	SURVIVOR X USB	SURVIVOR PIVOT	SURVIVOR PIVOT USB
5 Unit 120V AC Bank Charger	90910		✓		✓	
5 Unit 12V AC Bank Charger	90912		✓		✓	
120V AC Charge Cord	22060					
12V DC2 Charge Cord	22050					
12V DC2 Charge Cord	22051					
Charge Holder	90345	✓	✓		✓	
Lithium-ion Battery - C1D1	90341		✓		✓	
Alkaline/SL-B26 Battery Carrier	90342		✓	✓	✓	✓
Alkaline Battery Cartridge	90542	✓				
NiMH Battery	90339	✓				
SL-B26 Battery Pack - 1pk <i>*For more information on SL-B26 battery pack and bank chargers, turn to pg 107</i>	22101			✓		✓





VANTAGE® 180 X



Multi-fuel, right-angle flashlight

- Versatile - three lights in one - mount it to your helmet, attach it to your turn out gear or use as a handheld flashlight
- Head articulates 180° to aim the beam where you need it
- Easily attaches to both traditional and modern style helmets with no tools necessary

	HIGH	LOW
LUMENS	250	100
CANDELA	7,200	2,650
DISTANCE	170m	103m
RUN TIME CR123A	4 hrs	12 hrs
RUN TIME SL-B26	5 hrs	15 hrs



VANTAGE® SERIES

Description	Item #
Vantage 180 X USB - Includes (1) SL-B26 battery pack and helmet bracket - Orange	88911
Vantage 180 X USB - Includes (1) SL-B26 battery pack and helmet bracket - Black	88913
Vantage 180 X - Includes (2) CR123A batteries and helmet bracket - Orange	88901
Vantage 180 X - Includes (2) CR123A batteries and helmet bracket - Black	88903

Size and Weight	Battery
5.2" (13.2 cm); SL-B26: 5.9 oz (167g) // CR123A: 5.5 oz (156g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries

NFPA

Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)



NFPA

Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)

CE

Meets applicable European Community Directives

UPGRADED

VANTAGE®



Compact, powerful, shock-proof, and virtually indestructible helmet light

- Attaches easily to helmets and hard hats, no tools necessary
- Fits both traditional and modern helmets
- Features a bright, blue taillight LED to be seen from behind even in heavy smoke

LUMENS	225
CANDELA	22,000
DISTANCE	297m
RUN TIME	5 hrs

Description	Item #
Vantage - Includes (2) CR123A lithium batteries - Black	69140

Size and Weight	Battery
3.08" (7.82 cm); 5.08 oz (144g)	(2) CR123A lithium batteries



NFPA

Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)

CE

Meets applicable European Community Directives

VANTAGE® II



IPX7

Compact, low-profile helmet light designed to easily attach above or below brim of fire helmets

- Shock-proof and virtually indestructible with safety feature - blue taillight LED so you can be scene from behind
- Large push-button switch for easy on/off, even with gloves
- Swivel clamp to optimize beam location

Fire model



	HIGH	LOW
LUMENS	350	135
CANDELA	3,500	1,700
DISTANCE	118m	80m
RUN TIME	2.25 hrs	5 hrs

Description	Item #
Vantage II - Fire - Includes (1) CR123A lithium battery - Black	69331
Vantage II - Industrial - Includes (1) CR123A lithium battery - Black	69333
Vantage II - for MSA Cairns® 1010/1044 Traditional Fire Helmets - Includes (1) CR123A lithium battery - Black	69337
Bracket Kit - Fire	69334
Bracket Kit - Industrial	69336
Bracket Kit - for MSA Cairns® 1010/1044 Traditional Fire Helmets	69339

All right reserved. Cairns® is a registered trademark of the Cairns Trademark Trust.

Size and Weight	Battery
2.37" (6.02 cm); Industrial Mount: 2.97 oz (84.2g) // Fire Mount: 3.65 oz (103.5g)	(1) CR123A lithium



Industrial model

**fits in accessory slot of standard hard hats*



NFPA Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)

CE Meets applicable European Community Directives





STREAMLIGHT SAFETY-RATED LIGHTING TOOLS

// DIFFERENT LIGHTS FOR DIFFERENT HAZARDOUS LOCATIONS

The National Electric Code (NEC) defines hazardous locations by “class” and “division.” There are three classes:



CLASS I locations are made hazardous by the presence of flammable gases, liquids or vapors.



CLASS II locations are hazardous because combustible dusts are present.



CLASS III locations contain easily ignitable fibers or flyings.

The “Division” designation refers to the likelihood that ignitable concentrations of flammable materials are present. There are two divisions:



DIVISION 1 designates an environment where ignitable concentrations of flammable gases, liquids, vapors or dusts can exist some of the time or all of the time under normal operating conditions, or where easily ignitable fibers and flyings are manufactured, handled or used.



DIVISION 2 locations are where ignitable concentrations are not likely to exist under normal operating conditions or where Class 3 materials are stored or handled.

Hazardous classes are further defined by “groups” based on the physical properties of their combustible materials. These groups include (but are not limited to):



- GROUP A** Acetylene
- GROUP B** Hydrogen
- GROUP C** Ethylene, Carbon Monoxide
- GROUP D** Propane, gasoline, naphtha, benzene, butane, ethyl alcohol, acetone, methane



- GROUP E** Metals including aluminum, magnesium (Div. 1 only)
- GROUP F** Carbonaceous dusts including coal, carbon black, coke
- GROUP G** Dusts not included in E and F including wood, plastics, flour, starch or grain dusts



STREAMLIGHT GIVES YOU MORE SAFETY-RATED LIGHTS FOR MORE OPTIONS IN HAZARDOUS LOCATIONS.

Streamlight flashlights are tested and certified by the world's leading independent laboratories - including Underwriters Laboratories, ATEX, Demko, and the Mine Safety and Health Administration (MSHA). This testing is your assurance that the Streamlight flashlight you choose will be safe in the environment(s) in which you'll be using it.



// STREAMLIGHT'S HAZ-LO SERIES OF LIGHTING TOOLS PROVIDE DIFFERENT PATHS TO THE SAME RESULT: A DIVISION 1 RATING!

When working in a Division 1 area, we expect explosive atmospheres to be present. Streamlight's HAZ-LO product line is suitable for use in Division 1 areas. Streamlight uses different protection standards and testing at Nationally Recognized Test Labs (NRTL) to achieve the Division 1 rating that is common to all Streamlight HAZ-LO Lighting. This is the best possible performance while ensuring that your flashlight will not become an ignition source. ANSI/UL 783 is the specific standard for flashlights used in hazardous locations. ANSI/UL 913 is the intrinsically safe standard for general electronic equipment. While either standard can direct certification to Division 1 level, it is important to note Class, Group and Temperature code requirements to select the correct flashlight for specific applications.



Scan or click to watch our video:
"You Bet Your Light On It:
Safety Ratings Explained"

// WHY ARE SAFETY RATINGS IMPORTANT?

There are several types of locations in which it can be extremely dangerous to use any light that has not been specifically designed — and approved — for that kind of location. These are areas where fire or explosion hazards may exist due to the presence of flammable gases, liquids, vapors, dusts, or ignitable fibers or flyings. If you will be using a flashlight in any potentially hazardous location, it is critical that your light be safety-rated for that specific kind of environment.

// ATEX RATINGS

Streamlight also offers safety-rated lights that comply with the European Union (EU) Directive 2014/34/EU (ATEX) for products intended for use in potentially explosive atmospheres within the EU member countries. Please visit our website, streamlight.com for more information on ATEX-rated products. We also have a catalog of ATEX-rated products available upon request.



DUALIE® AND PROPOLYMER® SERIES

DUALIE® RECHARGEABLE



Rechargeable, multi-function flashlight with dual beams

- Recharges in 8 hours
- Spot, flood and combo modes
- Durable, non conductive non-corrosive polymer construction
- Mount virtually anywhere with charge holder

	SPOT	FLOOD	COMBO
LUMENS	180	105	275
CANDELA	11,500	60	--
DISTANCE	171m	18m	--
RUN TIME	7.25 hrs	13.5 hrs	5.5 hrs

Description	Item #
Dualie Rechargeable - 120V/100V AC - Yellow	68732
Dualie Rechargeable - 120V/100V AC - Black	68733
Dualie Rechargeable - Light Only - Yellow	68730
Dualie Rechargeable - Light Only - Black	68731
Dualie Rechargeable - Magnet - 120V/100V AC - Yellow	68793
Dualie Rechargeable - Magnet - 120V/100V AC - Black	68794
Dualie Rechargeable - Magnet - Light Only - Yellow	68785
Dualie Rechargeable - Magnet - Light Only - Black	68786

Size and Weight	Battery
7" (17.78 cm); 6.8 oz (193g) // Magnet: 7.5" (19.05 cm); 7.09 oz (201g)	Lithium-ion



Permissible Flashlight
App. No. 20-A160001-0
Tested for use in methane-air mixtures only

DUALIE® 3AA



Features two LEDs and three lighting modes: spot, flood, spot and flood combo with optional integrated magnet for hands-free use

- Durable, corrosion-proof polymer resin
- Dual head switches on either side of the body for easy beam selection and one-handed operation
- Snag free pocket clip with optional magnet

	SPOT	FLOOD	COMBO
LUMENS	140	140	245
CANDELA	7,300	80	---
DISTANCE	171m	8m	---
RUN TIME	18 hrs	18 hrs	9 hrs



Description	Item #
Dualie 3AA - Includes (3) AA alkaline batteries - Yellow	68750
Dualie 3AA - Includes (3) AA alkaline batteries - Black	68752
Dualie 3AA - batteries not included - Mailer - Yellow	68751
Dualie 3AA - batteries not included - Mailer - Black	68753
Dualie 3AA Magnet - Includes (3) AA alkaline batteries and lanyard - Yellow	68782
Dualie 3AA Magnet - Includes (3) AA alkaline batteries and lanyard - Black	68783
Dualie 3AA Magnet - batteries not included - Mailer - Yellow	68780
Dualie 3AA Magnet - batteries not included - Mailer - Black	68781

Size and Weight	Battery
7" (17.78 cm); 6.8 oz (193g) // Magnet: 7.1 oz (201g)	(3) AA alkaline



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G;
Class III, T-Code: T4



Permissible Flashlight
App. No. 20-A160001-0
Tested for use in methane-air
mixtures only

DUALIE® 3AA LASER



Intrinsically safe, high performance battery powered flashlight with laser

- Durable, corrosion-proof polymer resin
- Dual head switches on either side of the body for easy beam selection and one-handed operation
- Snag free pocket clip

	LED	LASER
LUMENS	150	<5mW output
CANDELA	7,700	---
DISTANCE	175m	---
RUN TIME	17 hrs	70 hrs



Description	Item #
Dualie 3AA Laser - Includes (3) AA alkaline batteries - Yellow	68760
Dualie 3AA Laser - Includes (3) AA alkaline batteries - Black	68762

Size and Weight	Battery
7" (17.78 cm); 6.8 oz (193g)	(3) AA alkaline



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G;
Class III, T-Code: T4



Permissible Flashlight
App. No. 20-A160001-0
Tested for use in methane-air
mixtures only

DUALIE® 3AA COLOR-RITE®



Multi-function, AA flashlight with Color-Rite Technology®

- Flood beam uses a high CRI LED for true color recognition
- Produces a soft, wide beam to illuminate your work area
- Chemical resistant, corrosion proof
- Snag free pocket clip

	SPOT (COOL WHITE)	FLOOD (WARM WHITE)	COMBO
LUMENS	225	175	320
CANDELA	8,000	380	7,000
DISTANCE	179m	39m	167m
RUN TIME	8 hrs	8.5 hrs	5 hrs

Color Temperature: 4,000k



Color-Rite®



Class I, II, Div. I
Grps. A, B, C, D, E, F, G
Class III, T-Code: T4

Description	Item #
Dualie 3AA Color-Rite - Includes (3) AA alkaline batteries - Yellow	68910

Size and Weight	Battery
7" (17.78 cm); 6.6 oz (187g)	(3) AA alkaline

DUALIE® 2AA



Dual beam, compact, C1D1 battery operated flashlight

- Spot and flood LED options
- Integrated magnet for hands-free use

	SPOT	FLOOD	COMBO
LUMENS	115	115	175
CANDELA	3,100	75	---
DISTANCE	111m	17m	---
RUN TIME	24 hrs	24 hrs	15 hrs



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G;
Class III, T-Code: T4

Description	Item #
Dualie 2AA - Includes (2) AA alkaline batteries - Clam - Yellow	67750
Dualie 2AA - Includes (2) AA alkaline batteries - Box - Yellow	67751

Size and Weight	Battery
6.1" (15.5 cm); 3.9 oz (111g)	(2) AA alkaline

STYLUS PRO® HAZ-LO®



Intrinsically safe, durable, alkaline penlight

- Features a tail switch with momentary and constant on operation
- Chemical-resistant polymer construction

LUMENS	105
CANDELA	380
DISTANCE	39m
RUN TIME	2.25 hrs



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G;
Class III, T-Class: T3/T4

Description	Item #
Stylus Pro HAZ-LO - Includes (2) AA alkaline batteries - Yellow	66300

Size and Weight	Battery
5.92" (15 cm); 1.9 oz (53.9g)	(2) AA alkaline





2AA PROPOLYMER[®] HAZ-LO[®]



Virtually indestructible safety-rated flashlight

- Long run time
- Provides a focused beam with optimum peripheral illumination
- Fits in your pocket or strap it to a helmet using Poly Mount Kit (see page 53)

Description	Item #
2AA ProPolymer HAZ-LO - Includes (2) AA alkaline batteries - Clam - Black	67100
2AA ProPolymer HAZ-LO - Includes (2) AA alkaline batteries - Clam - Yellow	67101

Size and Weight	Battery
6.4" (16.26 cm); 3.6 oz (100g)	(2) AA alkaline

LUMENS	65
CANDELA	2,300
DISTANCE	96m
RUN TIME	24 hrs



Permissible Flashlight.
Approval No. 20-A140002-0.
Tested for Intrinsic Safety in Methane-Air mixtures only.



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G;
Class III; T-Class: T4



2AAA PROPOLYMER[®] HAZ-LO[®]



General purpose, handheld (about the size of a marker), intrinsically-safe flashlight

- Push-button tailswitch for momentary on or on/off operation
- Extremely durable with super tough nylon housing
- Integrated pocket clip

Description	Item #
2AAA ProPolymer HAZ-LO - Includes (2) AA alkaline batteries - Clam - Yellow	66500
2AAA ProPolymer HAZ-LO - Includes (2) AA alkaline batteries - Box - Yellow	66505

Size and Weight	Battery
5.4" (13.7 cm); 1.9 oz (54g)	(2) AAA alkaline

LUMENS	60
CANDELA	800
DISTANCE	57m
RUN TIME	16 hrs



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G;
Class III; CL I, ZN 0, IIC;
T-Class: T4A





4AA PROPOLYMER® LUX



Safety-rated, long-reaching, flashlight

- Ergonomic design for comfortable handling
- Unbreakable, scratch resistant lens
- Durable, non-conductive polymer

LUMENS	200
CANDELA	12,000
DISTANCE	219m
RUN TIME	6 hrs



4AA Lux Div. 1



Class I, II, Div. 1, Grps. C, D, F, G;
Class I, Div. 2, Grps. A, B, C, D;
Class III, T-Code: T4

4AA Lux Div. 2



Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G;
Class III, T-Code: T3C

Description	Black	Yellow
4AA ProPolymer Lux Div. 2 - Includes (4) AA alkaline batteries	68344	68244
4AA ProPolymer Lux Div. 1 - Includes (4) AA alkaline batteries	68702	68602
Size and Weight	Battery	
7" (17.8 cm); 7.2 oz (204g)	(4) AA alkaline	

4AA PROPOLYMER® LED



Intrinsically safe flashlight producing a soft flood light

- Seven LEDs produce soft diffused light
- Perfect light for up close work
- Unbreakable, scratch resistant lens

LUMENS	67
RUN TIME	155 hrs



Class I, Div. 1, Grps. C, D;
Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G;
Class III, T-Code: T3C



Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G;
Class III, T-Code: T3C



Permissible Flashlight
App. No. 10C-658-0
Tested for use in methane-air
mixtures only

Description	Black	Yellow
4AA ProPolymer LED - batteries not included	68300	68200
4AA ProPolymer LED - Includes (4) AA alkaline batteries - Box	68301	68201
4AA ProPolymer LED - Includes (4) AA alkaline batteries - Clam	68302	68202
Size and Weight	Battery	
6.5" (16.51 cm); 6.3 oz (178.6g)	(4) AA alkaline	

POLY MOUNT KIT

“No tools required” kit to easily attach your flashlight to your hard hat

- Attaches to a variety of helmets and Streamlight lights (listed below) for hands-free use
- Adjustable so you can aim the light where you need it



Poly Mount Kit includes:

Adhesive base to attach to side of hard hat
Mounting base that slides into the slot of hard hat

Bands for:

Dualie® 2AA 2AA ProPolymer® HAZ-LO®
Dualie® 3AA 4AA ProPolymer® Lux
Dualie® Rechargeable PolyTac® / PolyTac® X



Shown with Dualie 2AA (not included) using adhesive base



Shown with Dualie 2AA (not included) using slot attachment

Description	Item #
Poly Mount Kit	68089

DUALIE® AND PROPOLYMER® ACCESSORIES

DESCRIPTION	ITEM #	DUALIE 2AA	DUALIE 3AA/ 3AA LASER	DUALIE RECHARGEABLE	2AA PROPOLYMER HAZ-LO	4AA PROPOLYMER LUX	STYLUS PRO HAZ-LO
Charge Holder	68790			√			
6 Unit Bank Charger	68789			√			
Lithium-ion Battery	68792			√			
120V AC USB Cord	22071			√			
12V USB Cord	22080			√			
Nylon Holster	66029						√
Helmet Mount	68085		√	√			
Metal Clip	66301						√
Poly Mount Kit	68089	√	√	√	√	√	
Tailcap Assembly	66302						√
Rubber Helmet Band	99075				√	√	
Red Safety Wand	74903				√		
Yellow Safety Wand	74904				√		
Glow in the Dark Safety Wand	74913				√		



LIGHT ONLY

COMPACT & FULL FRAME PISTOLS

UNIVERSAL RAIL MOUNT MODELS



TLR-1® HP



TLR-1® HP-X



TLR-1 HL®



TLR-1 HL®-X



TLR-1® // TLR-1®s



TLR-3®X



TLR-7® X



TLR-7® X Contour Remote



TLR-7® HL-X



TLR-9®

SUBCOMPACT PISTOLS

TRIGGER GUARD AND RAIL MOUNT MODELS



TLR-3®X



TLR-6®
Non-Laser



TLR-7® X sub



TLR-7® HL-X sub

LONG GUN/AR

SHOTGUN FOREND AND RAIL MOUNT MODELS



TL-Racker®



TLR® RM 1



TLR® RM 1 HL-X



TLR® RM 2



ProTac®
Rail Mount 1L-X //
Rail Mount 1L-X Pro



ProTac®
Rail Mount 1



ProTac®
Rail Mount 2



ProTac® Rail
Mount HL-X



ProTac® Rail Mount
HL-X Pro



ProTac® Rail Mount
HP-X Pro



ProTac® 2.0
Rail Mount



ProTac® 2.0
Rail Mount HP



TLR-1 HL®
(Long Gun Kit)



TLR-1® HP
(Long Gun Kit)



TLR-1 HPL®
(Long Gun Kit)

LIGHT/LASER COMBO

COMPACT & FULL FRAME PISTOLS

UNIVERSAL RAIL MOUNT MODELS



TLR-2® // TLR-2®s



TLR-2 HL®



TLR-2® G // TLR-2 HL® G



TLR-4® // TLR-4® G



TLR-8® HL-X // TLR-8® HL-X G



TLR-8® X // TLR-8® X G



TLR-10® // TLR-10® G

SUBCOMPACT PISTOLS

TRIGGER GUARD & RAIL MOUNT MODELS



TLR-6®



TLR-6 HL® // TLR-6 HL® G



TLR-8® X // TLR-8® X G



TLR-8® X sub // TLR-8® X G sub



TLR-8® HL-X // TLR-8® HL-X G



TLR-8® HL-X sub // TLR-8® HL-X G sub

LONG GUN/AR

SHOTGUN FOREND AND RAIL MOUNT MODELS



TLR-2® // TLR-2®s



TLR-2 HL®



TLR-2 HL® G



TLR® RM 1 Laser Red // Green



TLR® RM 2 Laser Red // Green



ProTac® Rail Mount HL-X Laser

SPECIALTY/IR

LONG GUN/AR & FULL FRAME PISTOLS



ProTac® Rail Mount VIR Pro



TLR-VIR® II



It can be difficult to choose the right weapon-mounted light for your specific gun and application. We want to make the process easier. That's why we designed the TLR Fit Guide to make it easy for you to select the right light for your weapon.

SCAN OR CLICK THE QR CODE TO VIEW OUR TLR FIT GUIDE

Beam Patterns Explained

Choosing the best gun light means pairing the right beam with your needs. Streamlight's range of gun lights offers Traditional, High-Lumen, and High-Candela options, each designed with features tailored to different tactical applications. Whether you need wide area visibility, a powerful pinpoint beam, or a mix of both, Streamlight has a solution to keep you ready for any challenge.



Traditional Beam Pattern: Designed for versatile, multi-purpose use, these lights offer exceptional value across a wide range of lighting needs.

Performance Characteristics	Traditional Product	
<ul style="list-style-type: none"> Optimal balance of candela and lumens - the beam pattern most people expect out of a quality flashlight Very good all-around use, broadest range of lighting applications Good focus and arc/periphery light Longest regulated run times 	<ul style="list-style-type: none"> TLR-1[®] and TLR-1[®]s TLR-2[®] and TLR-2[®]s TLR-3[®]X TLR-4[®] Series TLR-6[®] TLR-7[®] X Series 	<ul style="list-style-type: none"> TLR-8[®] X Series TLR-9[®] TLR-10[®] Series ProTac[®] Rail Mount 1 ProTac[®] Rail Mount 2

High Lumen Beam Pattern: Delivers maximum brightness with a wide beam pattern, ensuring full situational awareness. Perfect for illuminating smaller spaces where intense light is essential without requiring long-range reach.

Performance Characteristics	High-Lumen Product	
<ul style="list-style-type: none"> High-lumen beam Maximum illumination - a broader beam pattern with a wider center spot Shorter regulated run time More glare/bounce back 	<ul style="list-style-type: none"> TLR-1 HL[®] TLR-1 HL[®]-X TLR-2 HL[®] Series TLR-6 HL[®] Series TLR-7[®] HL-X sub 	<ul style="list-style-type: none"> TLR-8[®] HL-X sub Series ProTac[®] Rail Mount HL-X Series ProTac[®] 2.0 Rail Mount ProTac[®] Rail Mount 1L-X ProTac[®] Rail Mount VIR Pro

High Candela Beam Pattern: Delivers powerful, long-distance beam with high-lumen output - perfect for down-range applications requiring precision and clarity.

Performance Characteristics	High-Candela Product	
<ul style="list-style-type: none"> High-candela beam Casts a wide, bright beam with a tight, focused center spot for greater down-range light More light on your target at a distance 	<ul style="list-style-type: none"> TLR-1[®] HP TLR-1[®] HP-X TLR-1 HPL[®] TLR-7[®] HL-X Series TLR-8[®] HL-X Series 	<ul style="list-style-type: none"> TLR[®] RM 1 Series TLR[®] RM 2 Series ProTac[®] 2.0 Rail Mount HP ProTac[®] Rail Mount HP-X Pro

TLR-1[®] EVOLUTION



2006
 -First Generation
 -80 Lumens
 -Later Upgraded to 300 Lumens

2013
 -630 Lumens
 -Later Upgraded to 1,000 Lumens

2024
 -1,500 Lumens
 -Front Loaded Batteries
 -Multi-Fuel
 -Paddle Switches

2025
 -65,000 Candela
 -Original Form Factor

2025
 -77,000 Candela
 -Front Loaded Batteries
 -Multi-Fuel
 -Paddle Switches

THEN



TLR-1[®]



TLR-1[®] HL



TLR-1 HL-X



TLR-1[®] HP



TLR-1[®] HP-X

NOW

TLR-1 HL[®]

WHITE LIGHT ILLUMINATOR



IPX7

Provides for maximum illumination with a wide beam pattern that lights up large areas so you can identify what is nearby

- Rail-grip clamp system securely attaches/detaches quickly and safely
- User programmable strobe for disorienting
- Unbreakable, scratch-resistant, gasket sealed lens
- Ambidextrous momentary/constant-on operation

LUMENS	1,000
CANDELA	20,000
DISTANCE	283m
RUN TIME	1.5 hrs



Description	Item #
TLR-1 HL - Includes Rail Locating Keys for use with GLOCK [®] style, 1913 Picatinny, Smith & Wesson [®] 99/TSW, SIG P320 and Beretta [®] 90-two and (2) CR123A batteries - Black	69260
TLR-1 HL - Includes Rail Locating Keys for use with GLOCK [®] style, 1913 Picatinny, Smith & Wesson [®] 99/TSW, Sig SAUER P320 [®] and Beretta [®] 90-two and (2) CR123A batteries - FDE	69266
TLR-1 HL - Includes Rail Locating Keys for use with GLOCK [®] style, 1913 Picatinny, Smith & Wesson [®] 99/TSW, Sig SAUER P320 [®] and Beretta [®] 90-two and (2) CR123A batteries - FDE Brown	69267
TLR-1 HL - Long Gun Kit - Includes safe off remote door switch, remote pressure switch, mounting clips, standard door switch and (2) CR123A batteries - Black	69262
TLR-1 HL - Dual Remote Kit - Includes dual remote pressure switch, "safe off" door switch, mounting clips and (2) CR123A batteries - Black	69889



Size and Weight	Battery
3.39" (8.61 cm); 4.32 oz (122.5g)	(2) CR123A lithium



TLR-1 HL[®]-X

WHITE LIGHT ILLUMINATOR



Multi-fuel, high-lumen, rail-mounted light with front loading batteries

- Wide peripheral beam pattern gives you a powerful 1,500 lumen light
- Standard and extended switches
- Rapid battery replacement without removing the light from your firearm (as shown below)
- SL-B9 battery pack recharges in 2.5 hours

	SL-B9	CR123A
LUMENS	1,500	1,000
CANDELA	20,000	15,000
DISTANCE	283m	245m
RUN TIME	1 hr	1.5 hrs



Description

TLR-1 HL-X - Includes Rail Locating Keys for use with GLOCK[®] style, 1913 Picatinny, Smith & Wesson[®] 99/TSW, Sig P320 and Beretta[®] 90-two and (2) CR123A batteries - Black

Item

69500

TLR-1 HL-X USB - Includes Rail Locating Keys, (2) SL-B9 battery packs and USB-C cord - Black

69501

Size and Weight

3.45" (8.76 cm); SL-B9: 5.19 oz (147g) //
CR123A: 4.94 oz (140g)

Battery

(2) SL-B9 battery packs or
(2) CR123A lithium

TLR-1[®] HP

WHITE LIGHT ILLUMINATOR



High-candela, gun light for both handguns and long guns

- Secure Mounting: Attaches to handguns with GLOCK[®]-style rails and all MIL-STD-1913 (Picatinny) rails
- Customizable strobe
- Versatile Use: optional long gun kit available for expanded compatibility

LUMENS	1,000
CANDELA	65,000
DISTANCE	510m
RUN TIME	1.75 hrs



Description	Item #
TLR-1 HP - Includes Rail Locating Keys and (2) CR123A batteries - Black	59150
TLR-1 HP - Includes Rail Locating Keys and (2) CR123A batteries - FDE	59151
TLR-1 HP Long Gun Kit - Includes Safe off remote door switch, remote pressure switch, mounting clips, standard door switch and (2) CR123A batteries - Black	59152

Size and Weight	Battery
3.39" (8.61 cm); 4.32 oz (122.5g)	(2) CR123A lithium batteries

TLR-1[®] HP-X


WHITE LIGHT ILLUMINATOR



Multi-fuel, high-candela, rail-mounted light with hinged facecap for quick front loading batteries

- Interchangeable Switches: Customize controls for preferred handling
- Programmable strobe
- Rapid battery replacement without removing the light from your firearm (as shown below)
- SL-B9 recharges in 2.5 hours

	SL-B9	CR123A
LUMENS	1,300	1,000
CANDELA	77,000	53,000
DISTANCE	555m	460m
RUN TIME	1 hr	1.5 hrs



HIGH CANDELA BEAM PATTERN



Description	Item #
TLR-1 HP-X - Includes Rail Locating Keys and (2) CR123A batteries - Black	69167
TLR-1 HP-X USB - Includes Rail Locating Keys, (2) SL-B9 battery packs and USB-C cord - Black	69168

Size and Weight	Battery
3.7" (9.4 cm); SL-B9: 5.43 oz (154g) // CR123A: 5.2 oz (148g)	(2) SL-B9 battery packs or (2) CR123A lithium

TLR-1® // TLR-1®s

WHITE LIGHT ILLUMINATOR

Durable gun light that produces a concentrated beam with optimum peripheral illumination

- Available in standard or strobe models
- Mounts directly to handguns with GLOCK® style rails and all MIL-STD-1913 (Picatinny) rails

Description	Item #
TLR-1 – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG P320 and Beretta® 90-two and (2) CR123A batteries - Black	69110
TLR-1s – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG P320 and Beretta® 90-two and (2) CR123A batteries - Black	69210

Size and Weight	Battery
3.39" (8.61 cm); 4.18 oz (118.6g)	(2) CR123A lithium



IPX7

LUMENS	300
CANDELA	12,000
DISTANCE	219m
RUN TIME	2.5 hrs



TLR-2 HL®

WHITE LIGHT ILLUMINATOR / RED LASER



IPX4

Super bright, 1000 lumen gun light with red aiming laser

- Wide peripheral beam and a 640-660nm red laser
- Unbreakable, scratch-resistant, gasket sealed lens
- Easy, fast battery installation



1000 LUMENS



LUMENS	1,000
CANDELA	20,000
DISTANCE	283m
RUN TIME	1.5 hrs

Laser mode runs 45 hours

Description	Item #
TLR-2 HL - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99 TSW, SIG P320 and Beretta® 90-two and (2) CR123A batteries - Black	69261

Size and Weight	Battery
3.39" (8.61 cm); 4.88 oz (138.4g)	(2) CR123A lithium

TLR-2 HL® G

WHITE LIGHT ILLUMINATOR / GREEN LASER



IPX4

Super bright, 1000 lumen gun light with green aiming laser

- Wide peripheral beam and a 510-530nm green laser
- Unbreakable, scratch-resistant, gasket sealed lens
- Easy, fast battery installation



1000 LUMENS



LUMENS	1,000
CANDELA	20,000
DISTANCE	283m
RUN TIME	1.5 hrs

Laser mode runs 17 hours

Description	Item #
TLR-2 HL G - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG SAUER P320® and Beretta® 90-two and (2) CR123A batteries - Black	69265

Size and Weight	Battery
3.39" (8.61 cm); 4.88 oz (138.4g)	(2) CR123A lithium

TLR-2® // TLR-2®s

WHITE LIGHT ILLUMINATOR / RED LASER



Durable gun light with red laser that securely fits a broad range of weapons

- Wide peripheral beam and a 650-660nm red laser
- Mounts directly to handguns with GLOCK® style rails and to all MIL-STD-1913 (Picatinny) rails

LUMENS	300
CANDELA	12,000
DISTANCE	219m
RUN TIME	2.5 hrs
Laser mode runs 48 hours	



Description	Item #
TLR-2 – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG SAUER P320® and Beretta® 90-two and (2) CR123A batteries - Black	69120
TLR-2s – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG SAUER P320® and Beretta® 90-two and (2) CR123A batteries - Black	69230
Size and Weight	Battery
3.39" (8.61 cm); 4.72 oz (133.8g)	(2) CR123A lithium

TLR-2® G

WHITE LIGHT ILLUMINATOR / GREEN LASER



Durable gun light with green laser that can be seen even in the daylight

- Highly visible beam and a 510-530nm green laser
- User programmable strobe
- Mounts directly to handguns with GLOCK® style rails and all MIL-STD-1913 (Picatinny) rails

LUMENS	300
CANDELA	12,000
DISTANCE	283m
RUN TIME	2.5 hrs
Laser mode: runs 17 hours	



Description	Item #
TLR-2 G - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG SAUER P320® and Beretta® 90-two and lithium batteries - Black	69250
Size and Weight	Battery
3.39" (8.61 cm); 4.72 oz (133.8g)	(2) CR123A lithium

TLR-3®X

WHITE LIGHT ILLUMINATOR



Designed for subcompact and compact handguns, offering 550 lumens and 161 meter beam distance for clear visibility

- Impact and chemical-resistant, heat-stabilized polymer construction
- Reversible jaws for compatibility across compact/sub compact pistols
- One-handed snap on tighten interface keeps hands away from muzzle when attaching and detaching

LUMENS	500
CANDELA	6,500
DISTANCE	161m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Description	Item #
TLR-3X (1913) - Includes mounting kit with keys, paddles, multi-tool and (1) CR123A lithium battery	59100
TLR-3X (1913 Slim) - Includes mounting kit with key, paddles, multi-tool and (1) CR123A lithium battery	59102
TLR-3X (SIG SAUER® P365®/XL closed rail systems) - Includes mounting kit with key, paddles, multi-tool and (1) CR123A lithium battery	59104
TLR-3X USB (1913) - Includes mounting kit with keys, paddles, multi-tool and (1) SL-B9 battery pack	59101
TLR-3X USB (1913 Slim) - Includes mounting kit with key, paddles, multi-tool, and (1) SL-B9 battery pack	59103
TLR-3X USB (SIG SAUER® P365®/XL closed rail systems) - Includes mounting kit with key, paddles, multi-tool and (1) SL-B9 battery pack	59105



Size and Weight	Battery
2.75" (6.99 cm); SL-B9: 2.25 oz (63.8g) // CR123A: 2.15 oz (60.9g)	(1) SL-B9 battery pack or (1) CR123A lithium battery

TLR-4® // TLR-4® G

WHITE LIGHT ILLUMINATOR / RED LASER or GREEN LASER



Both polymer rail-mounted tactical lights with either 640-660nm red laser or TLR-4 G with 510-530nm green laser

- Ambidextrous momentary/constant on operation
- Models also available for H&K USP compact frame and H&K USP full size frame

LUMENS	170
CANDELA	3,300
DISTANCE	115m
RUN TIME	1.5 hrs
Laser mode runs 15 hours	



LUMENS	160
CANDELA	3,200
DISTANCE	113m
RUN TIME LED	1.75 hrs
RUN TIME LED + LASER	1.25 hrs
Laser mode runs 4 hours	



Description	Item #	Description	Item #
TLR-4 - Includes Rail Locating Keys and (1) CR2 lithium battery - Black	69240	TLR-4 G - Includes Rail Locating Keys for use with Picatinny or GLOCK® style rails and (1) CR2 lithium battery - Black	69245
TLR-4 - H&K USP Compact - Includes (1) CR2 lithium battery - Black	69241	TLR-4 G H&K USP Compact - Includes (1) CR2 lithium battery - Black	69246
TLR-4 - H&K USP Full-Size - Includes (1) CR2 lithium battery - Black	69242	TLR-4 G H&K USP Full-Size - Includes (1) CR2 lithium battery - Black	69247

Size and Weight	Battery
2.73" (6.93 cm); 2.81 oz (79.7g)	(1) CR2 lithium

TLR-6®

WHITE LIGHT ILLUMINATOR / RED LASER



Designed to securely attach to a variety of subcompact handguns; features 640-660nm red laser

- Tool-less battery replacement without removal from the weapon or the need to re-sight the laser
- Ambidextrous push-button switches on either side for easy operation
- Securely attaches to the trigger guard on hand guns
- Models available without laser

LUMENS	100
CANDELA	2,000
DISTANCE	89m
RUN TIME	1 hr
Laser mode run 11 hours	

Description	Item #
TLR-6 (GLOCK® 42/43) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black	69270
TLR-6 (GLOCK® 26/27/33) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black	69272
TLR-6 Universal Kit* – Includes LED/Laser module and select TLR-6 body housings – Black	69277
TLR-6 (M&P® Shield™ 40/9) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black	69273
TLR-6 (GLOCK® 42/43) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Flat Dark Earth	69278
TLR-6 (SIG SAUER® P365) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black	69284
TLR-6 (GLOCK® 43X/48 MOS) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black	69286
TLR-6 (SA Hellcat®) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black	69287
TLR-6 (Taurus GX4™) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black	69288
TLR-6 (GLOCK® 17/19/21) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black	69290
TLR-6 (SA XD®) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black	69291
TLR-6 (S&W M&P®) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black	69293
NON-LASER MODELS	
TLR-6 (GLOCK® 42/43) Without Laser – White LED – Includes (2) CR 1/3N lithium batteries – Black	69280
TLR-6 (GLOCK® 26/27/33) Without Laser – White LED – Includes (2) CR 1/3N lithium batteries – Black	69282
TLR-6 (M&P® Shield™) Without Laser – White LED – Includes (2) CR 1/3N lithium batteries – Black	69283
TLR-6 (SIG SAUER® P365®/XL) Without Laser – White LED – Includes (2) CR 1/3N lithium batteries – Black	69285



*Universal Kit includes one LED/laser aiming module and the following shells: GLOCK 42, GLOCK 26, M&P Shield, KAHR ARMS, SIG SAUER, KIMBER Micro. (Flat Dark Earth, Rail Mount, 1911 & Non Laser models not included)

All Rights Reserved. M&P Shield™, GLOCK®, SIG SAUER®, Springfield Army®, KIMBER®, Colt®, Ruger®, & KAHR® are registered trademarks of Smith & Wesson, GLOCK, Inc., SIG SAUER, Springfield Inc., Colt, Ruger, KIMBER, IP LLC & Saeilo Enterprises, Inc. Streamlight has not sought endorsement of this product from Smith & Wesson®, GLOCK®, Springfield Inc., SIG SAUER®, KIMBER®, KAHR® Arms or Saeilo Enterprises, Inc.

Size and Weight	Battery
2.3" (5.84 cm); 1.27 oz (36g) <i>Size & Weight vary by model</i>	(2) CR-1/3 N Lithium

TLR-6 HL[®]

WHITE LIGHT ILLUMINATOR / RED LASER OR GREEN LASER



IPX4

Ultra-compact weapon light with a high-power LED and integrated aiming laser features a rechargeable battery system powering 300 lumens of bright light

- Designed to securely attach to multiple variations of weapons
- Includes three easy-to-swap batteries to triple your run time
- Portable charging case conveniently stores and charges batteries without the need to tether your gun


LUMENS	300
CANDELA	4,250
DISTANCE	130m
RUN TIME	20 min
Red laser runs 9 hours	
Green laser runs 5 hours	



Description	Item #
TLR-6 HL (GLOCK [®] 42/43) White LED/Red Laser – Includes (3) SL-B2 batteries and charger - Black	69340
TLR-6 HL (GLOCK [®] 42/43) White LED/Red Laser – Includes (3) SL-B2 batteries and charger - Flat Dark Earth	69341
TLR-6 HL (M&P [®] Shield™ 40/9) White LED/Red Laser – Includes (3) SL-B2 batteries and charger - Black	69342
TLR-6 HL (G43X/48) White LED/Red Laser – Includes (3) SL-B2 batteries and charger – Black	69345
TLR-6 HL (GLOCK [®] Rail Mount) White LED/Red Laser – Includes (3) SL-B2 batteries and charger - Black	69343
TLR-6 HL (SIG SAUER [®] P365/XL) White LED/Red Laser – Includes (3) SL-B2 batteries and charger - Black	69344
TLR-6 HL G (GLOCK [®] 42/43) White LED/Green Laser – Includes (3) SL-B2 batteries and charger - Black	69350
TLR-6 HL G (GLOCK [®] 42/43) White LED/Green Laser – Includes (3) SL-B2 batteries and charger - Flat Dark Earth	69351
TLR-6 HL G (M&P [®] Shield™ 40/9) White LED/Green Laser – Includes (3) SL-B2 batteries and charger - Black	69352
TLR-6 HL G (GLOCK [®] Rail Mount) White LED/Green Laser – Includes (3) SL-B2 batteries and charger - Black	69353
TLR-6 HL G (SIG SAUER [®] P365/XL) Without Laser – White LED – Includes (3) SL-B2 batteries and charger - Black	69354
TLR-6 HL G (G43X/48) White LED/Green Laser – Includes (3) SL-B2 batteries and charger – Black	69355

All Rights Reserved. M&P Shield™, GLOCK®, SIG SAUER®, Springfield Armory®, KIMBER®, Colt®, Ruger®, & KAHR® are registered trademarks of Smith & Wesson, GLOCK, Inc., SIG SAUER, Springfield Inc., Colt, Ruger, KIMBER, IP LLC & Saeilo Enterprises, Inc. Streamlight has not sought endorsement of this product from Smith & Wesson®, GLOCK®, Springfield Inc., SIG SAUER®, KIMBER®, KAHR® Arms or Saeilo Enterprises, Inc.

Size and Weight	Battery
2.5" (6.35 cm); 1.12 oz (31.8g) <i>Size & Weight vary by model</i>	(1) SL-B2 battery

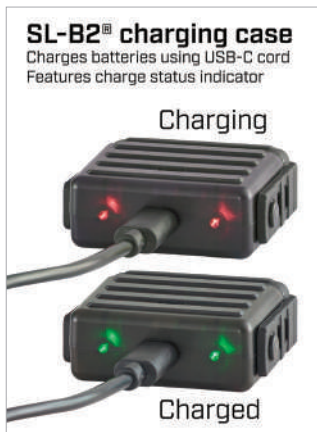

TLR-7® X

WHITE LIGHT ILLUMINATOR



Multi-fuel rail-mounted light

- User-interchangeable paddle switches to accommodate your shooting style
- Accepts either SL-B9 or CR123A batteries
- SL-B9 battery pack recharges in 2.5 hours
- Front loading batteries

	SL-B9	CR123A
LUMENS	725	550
CANDELA	9,500	7,200
DISTANCE	195m	170m
RUN TIME	1 hr	1.5 hrs

Description	Item #
TLR-7 X - Includes low switch, high switch, (1) CR123A lithium battery and key kit - Black	69424
TLR-7 X - Includes low switch, high switch, (1) CR123A lithium battery and key kit - FDE	69429
TLR-7 X USB - Includes key kit, high/low paddle switches, (1) SL-B9 battery pack and USB-C cord - Black	69455
TLR-7 X USB - Includes key kit, high/low paddle switches, (1) SL-B9 battery pack and USB-C cord - FDE	69456

Size and Weight	Battery
2.58 in (6.55 cm); SL-B9: 2.64 oz (74.8g) // CR123A: 2.48g (70.3g)	(1) SL-B9 battery pack or (1) CR123A lithium battery



TLR-7® X CONTOUR REMOTE

WHITE LIGHT ILLUMINATOR



Designed for one-handed shooting – ideal for dog handlers, SWAT teams, door breaching and close-quarter operations

- Rail grip clamp system lets you attach and remove quickly and securely — no tools needed, no hands near the muzzle
- Ambidextrous rear on/off switch; pressure-controlled grip switch provides momentary operation
- Front loading batteries
- Cannot be retrofitted with existing TLR-7 X products

	SL-B9	CR123A
LUMENS	725	550
CANDELA	9,500	7,200
DISTANCE	195m	170m
RUN TIME	1 hr	1.5 hrs

Description	Item #
TLR-7 X Contour Remote - for GLOCK® GEN 4 or GEN 5 models - Includes mounting key and (1) CR123A battery - Black	69428
TLR-7 X Contour Remote - for SIG SAUER® P320® XCARRY frame - Includes mounting key and (1) CR123A battery - Black	69480

Size and Weight	Battery
4.6" (11.68 cm); SL-B9: 2.85 oz (80.7g) // CR123A: 2.69 oz (76.3g)	(1) CR123A lithium battery or (1) SL-B9 battery pack



Streamlight's "X" Series indicates they are multi-fuel lights - you have the option to choose our rechargeable batteries which could save you money and reduce waste!

Rechargeable batteries can be used over and over, leaving fewer batteries to be manufactured (and transported) than with disposable batteries, helping to reduce both air and water pollution. Consuming up to 23 times less non-renewable natural resources they are making a positive impact on the environment and helping to reduce global warming.



STANDARD BATTERIES

- Very costly to replace
- Must be replaced often
- Create more packaging
- Create more downstream waste

VS.

STREAMLIGHT RECHARGEABLE BATTERIES

- Only need to be replaced every 2 - 5 years
- Reduce downstream waste
- Excellent performance
- 2 year battery warranty

SL-B9[®] PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK

The battery that transforms multi-fuel, high performance gun lights into rechargeable systems

- Features USB-C input and charge status indicators; recharges in 2.5 hours
- Integrated safety circuit protects battery from overcharge



Description	Item #
SL-B9 Li-Ion USB rechargeable battery pack - 2pk	20237
SL-B9 Li-Ion USB rechargeable battery pack - 8pk	20238
SL-B9 Li-Ion USB rechargeable battery pack - 100pk	20239
SL-B9 8-Unit Bank Charger - 12V - batteries not included	20230
SL-B9 8-Unit Bank Charger - 120V - batteries not included	20231
SL-B9 8-Unit Bank Charger - 12V - Includes (8) SL-B9 batteries	20233
SL-B9 8-Unit Bank Charger - 120V - Includes (8) SL-B9 batteries	20234
22" (55.88 cm) USB-C Cord	22084

Size and Weight	Battery
1.36" x 0.67" (3.45 x 1.7 cm); 0.7 oz (19.8g)	850mAh SL-B9 protected Li-Ion USB rechargeable battery pack



CHARGING

CHARGED



TLR-7[®] HL-X USB

WHITE LIGHT ILLUMINATOR



High-lumen, high-candela, multi-fuel tactical light

- Facecap engineered to produce a longer reaching, tighter beam
- User-interchangeable switches to accommodate your shooting style
- User-programmable output modes
- Front loading batteries

	SL-B9 DEFAULT	SL-B9 PROGRAMMABLE	CR123A
LUMENS	1,100	550	550
CANDELA	23,000	11,000	11,000
DISTANCE	303m	210m	210m
RUN TIME	30 min	1 hr	1.5 hrs

Description	Item #
TLR-7 HL-X USB – Includes high and low paddle switches, Rail Locating Keys, (1) SL-B9 battery pack and USB-C cord - Black	69458
TLR-7 HL-X USB – Includes high and low paddle switches, Rail Locating Keys, (1) SL-B9 battery pack and USB-C cord - FDE	69459

Size and Weight	Battery
2.9" (7.37 cm); SL-B9: 2.88 oz (81.6g) // CR123A: 2.8 oz (79.4g)	(1) SL-B9 battery pack or CR123A lithium battery



Safe Off feature prevents accidental activation; saves batteries

TLR-7® HL-X SUB

WHITE LIGHT ILLUMINATOR

Multi-fuel, high-lumen tactical light

- Features a specialized clamp system
- Includes high and low paddle switches to match your shooting style

Description	Item #
TLR-7 HL-X sub USB (GLOCK® 43X/48 MOS 43X/48 Rail) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black	69503
TLR-7 HL-X sub USB (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black *Does not fit the P365® XMACRO	69504
TLR-7 HL-X sub USB (1913) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black	69505
TLR-7 HL-X sub USB (19130S) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black	69506

Size and Weight	Battery
2.51" (6.38 cm); SL-B9: 2.49 oz (70.6g) // CR123A: 2.39 oz (67.8g)	(1) SL-B9 battery or (1) CR123A lithium battery



IPX7

	SL-B9 DEFAULT	SL-B9 PROGRAMMABLE	CR123A
LUMENS	1,000	550	550
CANDELA	13,000	7,300	7,300
DISTANCE	228m	171m	171m
RUN TIME	30 min	1 hr	1.5 hrs



Safe Off feature prevents accidental activation; saves batteries

TLR-7® X SUB

WHITE LIGHT ILLUMINATOR

Multi-fuel weapon light for subcompact handguns

- Ultra-compact and lightweight
- Fits on select railed subcompact pistols
- Includes interchangeable paddle switches

Description	Item #
TLR-7 X sub (GLOCK® 43X/48 MOS 43X/48 Rail Models Only) - Includes mounting kit with key and CR123A lithium battery - Black	69400
TLR-7 X sub (SIG SAUER® P365/XL Closed Rail System) - Includes mounting kit with key and CR123A lithium battery - Black	69401
TLR-7 X sub (1913) - Includes mounting kit with key and CR123A lithium battery - Black	69402
TLR-7 X sub (19130S) - Includes mounting kit with keys and CR123A lithium battery - Black	69404
TLR-7 X sub USB (GLOCK® 43X/48 MOS 43X/48 Rail Models Only) - Includes mounting kit with key and SL-B9 battery pack - Black	69405
TLR-7 X sub USB (SIG SAUER® P365/XL Closed Rail System) - Includes mounting kit with key and SL-B9 battery pack - Black	69406
TLR-7 X sub USB (1913) - Includes mounting kit with key and SL-B9 battery pack - Black	69407
TLR-7 X sub USB (19130S) - Includes mounting kit with keys and SL-B9 battery pack - Black	69408



IPX7

	SL-B9	CR123A
LUMENS	725	550
CANDELA	7,700	5,000
DISTANCE	176m	140m
RUN TIME	1 hr	1.5 hrs



Safe Off feature prevents accidental activation; saves batteries

Size and Weight	Battery
2.51" (6.38 cm); SL-B9: 2.64 oz (74.8g) // CR123A: 2.39 oz (67.8g)	(1) SL-B9 battery or (1) CR123A lithium battery

TLR-8[®] HL-X



WHITE LIGHT ILLUMINATOR / RED LASER

Rechargeable, high-lumen, multi-fuel tactical light with 640-660nm red laser

- Facecap engineered to produce a longer reaching, tighter beam
- User interchangeable paddle switches to accommodate your shooting style
- User-programmable output modes
- Front loading batteries

	SL-B9 DEFAULT	SL-B9 PROGRAMMABLE	CR123A
LUMENS	1,000	500	500
CANDELA	22,000	11,000	11,000
DISTANCE	297m	210m	210m
RUN TIME	30 min	1 hr	1.5 hrs

Laser mode runs 29 hours



Safe Off feature prevents accidental activation; saves batteries

Description

Item

TLR-8 HL-X USB – Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black

69465

Size and Weight

Battery

2.9" (7.37 cm); SL-B9: 3.14 oz (89g) // CR123A: 3.04 oz (86.2g)

(1) SL-B9 battery pack or (1) CR123A lithium battery

TLR-8[®] HL-X G

WHITE LIGHT ILLUMINATOR / GREEN LASER

Rechargeable, high-lumen, multi-fuel tactical light with 510-530nm green laser

- Facecap engineered to produce a longer reaching, tighter beam
- Includes rear paddle switches to accommodate your shooting style
- User-programmable output modes
- Front loading batteries

	SL-B9 DEFAULT	SL-B9 PROGRAMMABLE	CR123A
LUMENS	1,000	500	500
CANDELA	22,000	11,000	11,000
DISTANCE	297m	210m	210m
RUN TIME	30 min	1 hr	1.5 hrs

Laser mode runs 10 hours



Safe Off feature prevents accidental activation; saves batteries

Description

Item

TLR-8 HL-X G USB – Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black

69475

Size and Weight

Battery

2.9" (7.37 cm); SL-B9: 3.14 oz (89g) // CR123A: 3.04 oz (86.2g)

(1) SL-B9 battery pack or (1) CR123A lithium battery



TLR-8® HL-X SUB

WHITE LIGHT ILLUMINATOR / RED LASER



Multi-fuel, high-lumen tactical light

- Features a specialized clamp system
- Includes high and low paddle switches to match your shooting style

Description	Item #
TLR-8 HL-X sub USB (GLOCK® 43X/48 MOS 43X/48 Rail) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black	69466
TLR-8 HL-X sub USB (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black *Does not fit the P365® XMACRO	69467
TLR-8 HL-X sub USB (1913) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord- Black	69468
TLR-8 HL-X sub USB (19130S) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black	69469

Size and Weight	Battery
2.51" (6.38 cm); SL-B9: 2.87 oz (81.4g) // CR123A: 2.77 oz (78.5g)	(1) SL-B9 battery pack or (1) CR123A lithium battery

	SL-B9 DEFAULT	SL-B9 PROGRAMMABLE	CR123A
LUMENS	1,000	500	500
CANDELA	10,000	5,000	5,000
DISTANCE	200m	141m	141m
RUN TIME	30 min	1 hr	1.5 hrs

Laser mode run 29 hours



Safe Off feature prevents accidental activation; saves batteries

TLR-8® HL-X G SUB

WHITE LIGHT ILLUMINATOR / GREEN LASER



Multi-fuel, high-lumen tactical light

- Features a specialized clamp system
- Includes high and low paddle switches to match your shooting style

Description	Item #
TLR-8 HL-X G sub USB (GLOCK® 43X/48 MOS 43X/48 Rail) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black	69476
TLR-8 HL-X G sub USB (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black *Does not fit the P365® XMACRO	69477
TLR-8 HL-X G sub USB (1913) - Includes mounting kit with key, multi-tool, (1) SL-B9 rechargeable battery pack and USB-C cord - Black	69478
TLR-8 HL-X G sub USB (19130S) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black	69479

Size and Weight	Battery
2.51" (6.38 cm); SL-B9: 2.87 oz (81.4g) // CR123A: 2.77 oz (78.5g)	(1) SL-B9 battery pack or (1) CR123A lithium battery

	SL-B9 DEFAULT	SL-B9 PROGRAMMABLE	CR123A
LUMENS	1,000	500	500
CANDELA	10,000	5,000	5,000
DISTANCE	200m	141m	141m
RUN TIME	30 min	1 hr	1.5 hrs

Laser mode run 10 hours



Safe Off feature prevents accidental activation; saves batteries

TLR-8[®] X SUB

WHITE LIGHT ILLUMINATOR / RED LASER



Multi-fuel gun light with red laser designed to fit select railed subcompact pistols

- Features integrated 640-660nm red laser
- User interchangeable rear paddle switches
- Front loading batteries

LUMENS	500
CANDELA	5,000
DISTANCE	141m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Laser mode: runs 60 hours

Description	Item #
TLR-8 X sub (GLOCK [®] 43X/48 MOS 43X/48 Rail) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery - Black	69411
TLR-8 X sub (SIG SAUER [®] P365 [®] /XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery <i>*Does not fit the P365[®] XMACRO</i>	69417
TLR-8 X sub (1913) - Includes mounting kit with keys, multi-tool and (1) CR123A lithium battery - Black	69418
TLR-8 X sub (19130S) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery - Black	69419

Size and Weight	Battery
2.51" (6.38 cm); CR123A: 2.77 oz (78.53g) // SL-B9: 2.87 oz (81.4g)	(1) SL-B9 battery pack or (1) CR123A lithium



Safe Off feature prevents accidental activation; saves batteries

TLR-8[®] X G SUB

WHITE LIGHT ILLUMINATOR / GREEN LASER



Multi-fuel gun light with green laser designed to fit select railed subcompact pistols

- Features integrated 510-530nm green laser
- User interchangeable paddle switches
- Front loading batteries

LUMENS	500
CANDELA	5,000
DISTANCE	141m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Laser mode runs 11 hours

Description	Item #
TLR-8 X G sub (GLOCK [®] 43X/48 MOS 43X/48 Rail) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery	69431
TLR-8 X G sub (SIG SAUER [®] P365 [®] /XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery <i>*Does not fit the P365[®] XMACRO</i>	69437
TLR-8 X G sub (1913) - Includes mounting kit with keys, multi-tool and (1) CR123A lithium battery	69438
TLR-8 X G sub (19130S) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery	69439

Size and Weight	Battery
2.51" (6.38 cm); CR123A: 2.77 oz (78.53g) // SL-B9: 2.87 oz (81.4g)	(1) SL-B9 battery pack or (1) CR123A lithium



Safe Off feature prevents accidental activation; saves batteries

TLR-8[®] X

WHITE LIGHT ILLUMINATOR / RED LASER



Compact, multi-fuel rail-mounted light with red laser

- Features integrated 640-660nm red laser
- User interchangeable paddle switches
- Front loading batteries



Safe Off feature prevents accidental activation; saves batteries

LUMENS	500
CANDELA	5,000
DISTANCE	141m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Laser mode runs 36 hours (SL-B9)
Laser mode runs 60 hours (CR123A)

Description	Item #
TLR-8 X – Includes high switch mounted on light plus low switch in package, (1) CR123A battery and key kit - Black	69414

Size and Weight	Battery
2.58" (6.55 cm); CR123A: 2.64 oz (74.8g) // SL-B9: 2.74 oz (77.7g)	(1) SL-B9 battery pack or (1) CR123A lithium

TLR-8[®] X G

WHITE LIGHT ILLUMINATOR / GREEN LASER



Compact, multi-fuel rail-mounted light with green laser

- Features integrated 510-530nm green laser
- User interchangeable paddle switches
- Front loading batteries



Safe Off feature prevents accidental activation; saves batteries

LUMENS	500
CANDELA	5,000
DISTANCE	141m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Laser mode runs 11 hours

Description	Item #
TLR-8 X G – Includes high switch mounted on light plus low switch in package, (1) CR123A battery and key kit - Black	69434

Size and Weight	Battery
2.58" (6.55 cm); CR123A: 2.64 oz (74.8g) // SL-B9: 2.74 oz (77.7g)	(1) SL-B9 battery pack or (1) CR123A lithium

TLR-9[®]

WHITE LIGHT ILLUMINATOR



Slim designed, rail-mounted light that rapidly attach/detaches from full frame weapons

- Produces a concentrated beam with optimum peripheral illumination
- Rail grip clamp securely attaches/detaches without putting your hands in front of the muzzle
- User interchangeable paddle switches
- Front loading batteries

LUMENS	1,000
CANDELA	10,000
DISTANCE	200m
RUN TIME	1.5 hrs

Strobe runs 3 hours



Safe Off feature prevents accidental activation; saves batteries

Description	Item #
TLR-9 - Includes Rail Locating Keys and (2) CR123A lithium batteries with high/low switches - Black	69464

Size and Weight	Battery
3.87" (9.83 cm); 4.26 oz (120.8g)	(2) CR123A lithium

TLR-10®

WHITE LIGHT ILLUMINATOR / RED LASER



Rail-mounted light with 640-660nm red laser that rapidly attaches/detaches from full frame weapons

- Fits on select railed subcompact pistols
- User interchangeable rear paddle switches
- Front loading batteries

LUMENS	1,000
CANDELA	10,000
DISTANCE	200m
RUN TIME	1.5 hrs

Laser mode runs 60 hours



Safe Off feature prevents accidental activation; saves batteries

Description	Item #
TLR-10 - Includes high switch (mounted), low switch, (2) CR123A lithium batteries and key kit - Black	69470

Size and Weight	Battery
3.87" (9.82 cm); 4.62 oz (131g)	(2) CR123A lithium

TLR-10® G

WHITE LIGHT ILLUMINATOR / GREEN LASER



Rail-mounted light with green laser that rapidly attaches/detaches from full frame weapons

- Features a white LED and 510-530nm green laser
- Front-loading battery capability
- User interchangeable paddle switches

LUMENS	1,000
CANDELA	10,000
DISTANCE	200m
RUN TIME	1.5 hrs

Laser mode runs 11 hours



Safe Off feature prevents accidental activation; saves batteries

Description	Item #
TLR-10 G - Includes high switch (mounted), low switch, (2) CR123A lithium batteries and key kit - Black	69473

Size and Weight	Battery
3.87" (9.82 cm); 4.62 oz (131g)	(2) CR123A lithium

SPEEDLOCKER®

Portable, locking storage container that provides you with swift and direct access

- Patented mechanical keypad with 31 user selectable combinations; requires no batteries
- Rugged, water-resistant construction with convenient carry handle
- Accommodates various fire arms
- Air travel suitable with supplied padlock

Description	Item #
SpeedLocker - Includes padlock and Allen Key	59000
Padlock with 3 keys	59001
3' (91.44 cm) Security Cable	59002

Size and Weight
Internal: 8" x 7.1" (20.3 x 18 cm) //
External: 12.4" x 8.2" x 2.78" (31.5 x 20.8 x 7.1 cm); 2.6 lbs (1.2 kg)

Notice: The SpeedLocker® is not an approved firearm safe. It is the user's responsibility to determine the suitability for the specific situation and need.





TLR-VIR® II

WHITE LIGHT/ IR/ IR LASER COMBO ILLUMINATOR

White LED weapon light with infrared LED and laser options

- Two lighting modes available
- IR requires night vision goggles
- Windage and Elevation adjustment screws with tactile indication
- Securely fits M17/M18 pistols and all long guns with MIL-STD-1913 rails



IPX7



LUMENS	300
CANDELA	5000
DISTANCE	600mW/sr
VISIBLE RUN TIME	1.5 hrs
IR RUN TIME	12 hrs

Description	Item #
TLR-VIR II - Visible LED/IR Illuminator/IR Laser - Includes Rail Locating Keys and CR123A lithium battery - Coyote	69191
TLR-VIR II - Visible LED/IR Illuminator/IR Laser - Includes Rail Locating Keys and CR123A lithium battery - Black	69192

Size and Weight	Battery
3.3" (8.39 cm); 3.82 oz (108g)	(1) CR123A lithium



TLR[®] RM 1 HL-X



COMPACT RAIL MOUNTED LIGHTING SYSTEM

Lightweight and compact, multi-fuel TLR light

- Designed to provide increased candela while maintaining lumen output
- Independently operating push-button and remote pressure switches
- System is packaged as a kit

	SL-B9	CR123A
LUMENS	1,000	500
CANDELA	22,000	11,000
DISTANCE	297m	210m
RUN TIME	30 min	1.5 hrs



Safe Off feature prevents accidental activation; saves batteries



Optional M-LOK[®] mount sold separately

Description	Item #	COO	TAA
TLR RM 1 HL-X USB - System - Includes straight momentary pressure switch, key kit, USB-C cord and (1) SL-B9 battery pack - Black	69483	US	YES
TLR RM 1 HL-X USB - Light Only - Includes key kit and (1) SL-B9 battery pack - Black	69484	US	YES

Size and Weight	Battery
3.64" (9.25 cm); SL-B9: 3.12 oz (88.5g) // CR123A: 3.02 oz (85.6g)	(1) SL-B9 battery pack or (1) CR123A lithium battery

TLR[®] RM 1



COMPACT RAIL MOUNTED LIGHTING SYSTEM

Compact light, built for long guns, delivering a powerful, far-reaching beam without sacrificing lumens

- Designed to provide increased candela while maintaining high-lumen output
- Independently operating push-button and remote pressure switches
- System is packaged as a kit

LUMENS	500
CANDELA	11,000
DISTANCE	210m
RUN TIME	1.5 hrs
Strobe runs 3 hours	



Safe Off feature prevents accidental activation; saves batteries



Optional M-LOK[®] mount sold separately

Description	Item #	COO	TAA
TLR RM 1 - System - Includes remote door switch, remote pressure switch, mounting clips & CR123A lithium battery - Black <i>(image shown to the right)</i>	69440	US	YES
TLR RM 1 - Light Only - Includes key kit & (1) CR123A lithium battery - Black	69441	US	YES
TLR RM 1 - with Dual Remote Switch	69442	US	YES

Size and Weight	Battery
3.64" (9.25 cm); 3.02 oz (85.6g)	(1) CR123A lithium





TLR[®] RM 2

COMPACT RAIL MOUNTED LIGHTING SYSTEM

Rail mounted light delivers superior performance with a focused long-range, high-candela beam all while sustaining a powerful lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit

LUMENS	1,000
CANDELA	22,000
DISTANCE	297m
RUN TIME	1.5 hrs
Strobe runs 3 hours	

Description	Item #	COO	TAA
TLR RM 2 - System - Includes remote pressure switch, mounting clips and (2) CR123A lithium batteries - Black <i>(image shown to the right)</i>	69450	US	YES
TLR RM 2 - Light Only - Includes CR123A lithium battery - Black	69451	US	YES

Size and Weight	Battery
4.97" (12.6 cm); 4.68 oz (132.7g)	(2) CR123A lithium


IPX7


1000
LUMENS



Safe Off feature prevents accidental activation; saves batteries



Optional M-LOK[®] mount sold separately



TLR[®] RM 1 LASER

WHITE LIGHT ILLUMINATOR / RED LASER



Designed for long guns, this compact light projects a far-reaching, high-candela beam - without compromising overall lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit with front loading batteries
- 640-660nm red laser

LUMENS	500
CANDELA	11,000
DISTANCE	210m
RUN TIME	1.5 hrs
Strobe runs 3 hours	
Laser runs 60 hours	



Safe Off feature prevents accidental activation; saves batteries



Optional M-LOK[®] mount sold separately



Description	Item #	COO	TAA
TLR RM 1 Laser - System - Includes remote pressure switch, mounting clips, (1) CR123A lithium battery - Black <i>(image shown to the right)</i>	69445	US	YES
TLR RM 1 Laser - Light Only - Includes key kit and (1) CR123A lithium battery - Black	69446	US	YES

Size and Weight	Battery
3.64" (9.25 cm); 3.24 oz (91.9g)	(1) CR123A lithium

TLR[®] RM 2 LASER

WHITE LIGHT ILLUMINATOR / RED LASER



Long-range, focused, high-candela light with 640-660nm red laser - all while sustaining a powerful lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading batteries

LUMENS	1,000
CANDELA	22,000
DISTANCE	297m
RUN TIME	1.5 hrs
Strobe runs 3 hours	
Laser runs 60 hours	



Safe Off feature prevents accidental activation; saves batteries



Optional M-LOK[®] mount sold separately



Description	Item #	COO	TAA
TLR RM 2 Laser - System - Includes remote pressure switch, mounting clips and (2) CR123A lithium batteries - Black <i>(image shown to the right)</i>	69447	US	YES
TLR RM 2 Laser - Light Only - Includes key kit and (2) CR123A lithium batteries - Black	69448	US	YES

Size and Weight	Battery
4.97" (12.6 cm); 5.11 oz (144.7g)	(2) CR123A lithium

TLR[®] RM 1 LASER-G

WHITE LIGHT ILLUMINATOR / GREEN LASER



Low-profile long gun light featuring a longer reaching, tighter beam and green laser

- Designed to provide increased candela while maintaining lumen output
- Independently operating push-button and remote pressure switches
- System is packaged as a kit

LUMENS	500
CANDELA	11,000
DISTANCE	210m
RUN TIME	1.5 hrs
Strobe runs 3 hours	
Laser runs 11 hours	

Description	Item #	COO	TAA
TLR RM 1 Laser-G - System - Includes remote pressure switch, mounting clips, CR123A lithium battery - Black <i>(image shown to the right)</i>	69443	US	YES
TLR RM 1 Laser-G - Light Only - Includes key kit and (1) CR123A lithium battery - Black	69444	US	YES

Size and Weight	Battery
3.64" (9.25 cm); 3.24 oz (91.9g)	(1) CR123A lithium



Safe Off feature prevents accidental activation; saves batteries



Optional M-LOK[®] mount sold separately



TLR[®] RM 2 LASER-G

WHITE LIGHT ILLUMINATOR / GREEN LASER



Larger rail mount light with longer-reaching, tighter beam and even greater candela production, all while maintaining high-lumen output

- Designed to provide increased candela while maintaining lumen output
- Independently operating push-button and remote pressure switches
- System is packaged as a kit

LUMENS	1,000
CANDELA	22,000
DISTANCE	297m
RUN TIME	1.5 hrs
Strobe runs 3 hours	
Green laser runs 11 hours	

Description	Item #	COO	TAA
TLR RM 2 Laser-G - System - Includes remote pressure switch, mounting clips, CR123A lithium battery - Black <i>(image shown to the right)</i>	69453	US	YES
TLR RM 2 Laser-G - Light Only - Includes key kit and (1) CR123A lithium battery - Black	69454	US	YES

Size and Weight	Battery
4.97" (12.6 cm); 5.11 oz (144.7g)	(2) CR123A lithium



Safe Off feature prevents accidental activation; saves batteries



Optional M-LOK[®] mount sold separately





TLR-1 HPL®

WHITE LIGHT ILLUMINATOR



High-candela, long-range, rail-mounted tactical light that produces an intensely bright, far-reaching wide beam

- Deep dish parabolic reflector produces long-range targeting beam with optimum peripheral illumination
- Available with either standard door switch or remote door switch

LUMENS	1,000
CANDELA	60,000
DISTANCE	490m
RUN TIME	1.5 hrs



Description	Item #
TLR-1 HPL Standard Switch - Includes Rail Locating Keys and lithium batteries - Black	69215
TLR-1 HPL Remote Switch - Includes Rail Locating Keys, remote switch, door switch and lithium batteries - Black	69216
TLR-1 HPL Long Gun Kit - Includes "safe off" remote door switch, remote pressure switch, mounting clips, standard door switch and lithium batteries - Black	69219

Size and Weight	Battery
4.83" (12.27 cm); 5.6 oz (158.8g) //	(2) CR123A
With Remote: 5.25" (13.34 cm); 5.9 oz (167.3g)	lithium batteries

TL-RACKER®



IPX7

All-in-one integrated shotgun forend light that reduces snag by eliminating the need for remote cords

- Ideal for shotgun breaching and close-quarter operations
- Ease of access with momentary and constant on modes
- Elongated switch pad accommodates virtually any hand size



Models available for Mossberg 500®/590® and Remington 870™

LUMENS	1,000
CANDELA	20,000
DISTANCE	283m
RUN TIME	1.5 hrs



Description	Item #
TL-Racker - Mossberg 500/590 - Includes (2) CR123A lithium batteries - Black	69600
TL Racker - Remington 870 - Includes (2) CR123A lithium batteries - Black	69601
TL Racker - Mossberg 590 Shockwave with strap - Includes (2) CR123A lithium batteries - Black	69602
TL Racker - Mossberg 500/590 - Includes (2) CR123A lithium batteries - Orange	69610
TL Racker - Remington 870 - Includes (2) CR123A lithium batteries - Orange	69611
TL-Racker Forend Wrench	69603

Note: For TL Rackers #69610 and #69611, orange designed for less lethal options





Size and Weight	Battery
8" (20.32 cm); 12.1 oz (343g)	(2) CR123A lithium batteries

TLR ACCESSORIES

	ITEM #	TLR-1 HL-X TLR-1 HP-X	TLR-1 HP TLR-1 HL TLR-2 HL	TLR-2 G TLR-2 HL G	TLR-1 TLR-1s	TLR-2 TLR-2s	TLR-3X	TLR- VIR II	TLR-6	TLR-6 HL TLR-6 HL G	TLR-7 X USB	TLR-7 HL-X USB
Ambidextrous Vertical Grip with Rail	69114	√	√	√	√	√						
TLR 12 ga. Mag Mount Mag Tube/Mossberg Rail	69901	√	√	√	√	√	√				√	√
Remington 870 Mount	69906	√	√	√	√	√	√				√	√
TLR-1 and TLR-2 Key Kit	69175		√	√	√	√						
TLR-7 X/TLR-8 X/TLR-9/TLR-10 Key Kit	69177										√	√
TLR-1 HL-X Key Kit	69178	√										
TLR M-LOK® Mount	88301	√	√	√	√	√						
Contour Remote - GLOCK®	69300		√	√	√	√						
Contour Remote - M&P®	69310		√	√	√	√						
Contour Remote - SIG SAUER® P320®	69481		√	√	√	√						
TLR-1/TLR-2 Remote Door Switch	69130		√	√	√	√						
Door Switch with Safe Off	69161		√	√	√	√						
Tail Switch Kit TLR-7 X and TLR-9	69490										√	√
Tail Switch Kit TLR-8 X/TLR-8 X G/TLR-10/TLR-10 G	69491											
Tail Switch Kit TLR-7 X sub	69492											
Tail Switch Kit TLR-8 X sub/TLR-8 X G sub	69493											
Tape Switch	69132		√	√	√	√						
Coil Pressure Switch	69134		√	√	√	√						
Straight Momentary Pressure Switch	69135		√	√	√	√						
Straight Latching Pressure Switch	89008		√	√	√	√						
Dual Remote Switch	69138		√	√	√	√						
Remote Retaining Clips	88178		√	√	√	√		√				
Red Flip Lens	69115	√	√	√	√	√		√				
Blue Flip Lens	69116	√	√	√	√	√		√				
Green Flip Lens	69117	√	√	√	√	√		√				
IR Flip Lens	69118	√	√	√	√	√		√				
Opaque Flip Lens	69124	√	√	√	√	√		√				
CR123A Batteries - 2pk	85175	√	√	√	√	√	√	√			√	√
CR123A Batteries - 8pk	85180	√	√	√	√	√	√	√			√	√
CR123A Batteries - 12pk	85177	√	√	√	√	√	√	√			√	√
CR123A Batteries - 400pk	85179	√	√	√	√	√	√	√			√	√
CR1/3N Batteries - 2pk	69271								√			
CR1/3N Batteries - 12pk	69281								√			
SL-B9 Battery Pack - 2pk	20237	√					√				√	√
SL-B2 Battery - 2pk	22121									√		
SL-B2 Charging Case	22120									√		



TLR-8 HL-X TLR-8 HL-X G	TLR-8 X TLR-8 X G	TLR-7 X SUB	TLR-8 X SUB TLR-8 X G SUB	TLR-7 HL-X SUB TLR-8 HL-X SUB TLR-8 HL-X G SUB	TLR-7 X CONTOUR REMOTE	TLR-9	TLR-10 TLR-10 G	TLR RM 1 HL-X USB	TLR RM 1 TLR RM-2 SERIES	TLR-1 HPL
										✓
	✓					✓	✓			✓
	✓					✓	✓			✓
										✓
	✓					✓	✓	✓	✓	
								✓	✓	✓
										✓
										✓
						✓				
✓	✓						✓			
		✓		✓ (TLR-7 HL-X subs)						
			✓	✓ (TLR-8 HL-X subs)						
										✓
										✓
								✓	✓	✓
								✓	✓	✓
								✓	✓	✓
						✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓			✓		





PROTAC® RAIL MOUNT SERIES

PROTAC® RAIL MOUNT 1L-X



// PROTAC® RAIL MOUNT 1L-X PRO



Compact, multi-fuel, high-output tactical light designed for short-barreled rifles, carbines, and submachine guns available in two models

With Remote Pressure Switch installed

With Standard button switch installed

- **1L-X Pro:** Jack-Cap® tailcap switch that offers operational switch redundancy with push-button operation or remote pressure switch operation
- **1L-X:** Uses a standard push button tail switch (as seen in image to the right) for ease of activation without a pressure pad
- TEN-TAP® Programmable
- MIL-STD-1913 Picatinny rail and M-LOK® mounts included



SL-B9	HIGH	LOW
LUMENS	850	100
CANDELA	30,000	3,400
DISTANCE	346m	117m
RUN TIME	0.5 hrs	4.5 hrs
Strobe runs 1.25 hours		

CR123A	HIGH	LOW
LUMENS	500	100
CANDELA	18,000	3,400
DISTANCE	268m	117m
RUN TIME	1.75 hrs	6.5 hrs
Strobe runs 2.5 hours		

Description	Item #
ProTac Rail Mount 1L-X - Includes tailcap switch, mounting hardware, M-LOK® mount and (1) CR123A lithium battery - Black	89026
ProTac Rail Mount 1L-X USB - Includes tailcap switch, mounting hardware, M-LOK® mount and (1) SL-B9 battery pack and USB cord - Black	89027

Description	Item #
ProTac Rail Mount 1L-X Pro - Includes Jack Cap®, M-LOK® Kit, Momentary Switch, Hardware Kit, 2.5 mm Allen Wrench, (1) CR123A lithium battery - Black	89024
ProTac Rail Mount 1L-X USB Pro - Includes Jack Cap®, M-LOK® Kit, Momentary Switch, Hardware Kit, 2.5 mm Allen Wrench, (1) SL-B9 battery pack and USB cord - Black	89025

Size and Weight

4.64" (11.79 cm); CR123A: 5.5 oz (155.9g) // SL-B9: 5.6 oz (158.8g)

Battery

(1) CR123A lithium or (1) SL-B9 battery pack

PROTAC® RAIL MOUNT 1

Long gun light featuring a fixed mount for MIL-STD-1913 (Picatinny) rails or M-LOK® mount

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- Multi-fuel; uses either a lithium or alkaline battery
- TEN-TAP® Programmable

CR123A	HIGH	LOW	ALKALINE	HIGH	LOW
LUMENS	350	40	LUMENS	150	40
CANDELA	12,000	1,380	CANDELA	4,950	1,380
DISTANCE	219m	19m	DISTANCE	141m	19m
RUN TIME	1.75 hrs	14.5 hrs	RUN TIME	1.5 hrs	8 hrs

Strobe runs 3 hours

Strobe runs 2.75 hours

Description	Item #
ProTac Rail Mount 1 - Includes remote pressure switch, tailcap switch, mounting hardware, M-LOK mount, (1) AA alkaline battery and (1) CR123A lithium battery - Black	88058

M-LOK® is a registered trademark of Magpul Industries Corp.

Size and Weight	Battery
4.25" (10.8 cm); CR123A: 4.3 oz (121.9g) // Alkaline: 4.5 oz (127.57g)	(1) CR123A lithium or (1) AA alkaline



IPX4

With Remote Pressure Switch installed



IPX7

With Standard button switch installed



PROTAC® RAIL MOUNT 2

Lightweight, rugged long gun light equipped with a fixed mount compatible with MIL-STD 1913 Picatinny rails or M-LOK mount for flexible installment operations

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- TEN-TAP® Programmable

	HIGH	LOW
LUMENS	625	60
CANDELA	22,000	2,000
DISTANCE	297m	89m
RUN TIME	2 hrs	21 hrs

Strobe runs 2.75 hours

Description	Item #
ProTac Rail Mount 2 - Includes remote pressure switch, tailcap switch, mounting hardware, M-LOK® mount and (2) CR123A lithium batteries - Black	88059

Size and Weight	Battery
5" (12.7 cm); 5 oz (141.7g)	(2) CR123A lithium batteries



IPX4

With Remote Pressure Switch installed



IPX7

With Standard button switch installed



PROTAC® RAIL MOUNT HL-X PRO

Long range, low-profile, long gun light with a Jack-Cap® tailcap switch (as seen in image below) that offers operational switch redundancy with both push-button operation or remote pressure switch operation

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- MIL-STD-1913 or M-LOK® compatible rails
- TEN-TAP® Programmable



	HIGH	LOW
LUMENS	1,000	60
CANDELA	50,000	3,100
DISTANCE	447m	111m
RUN TIME CR123A	1.25 hrs	21 hrs
RUN TIME SL-B26	1.75 hrs	24 hrs

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

Description	Item #
ProTac Rail Mount HL-X Pro - Includes Jack-Cap®, momentary remote switch, remote retaining clips, mounting hardware, M-LOK mount and (2) CR123A lithium batteries - Black	88126
ProTac Rail Mount HL-X Pro USB - Includes Jack-Cap®, M-LOK® kit, momentary switch, hardware kit, 2.5 mm Allen Wrench, (1) SL-B26 battery pack and USB cord - Black	88127
ProTac Rail Mount HL-X Pro USB - Includes Jack-Cap®, M-LOK® kit, momentary switch, hardware kit, 2.5 mm Allen Wrench, (1) SL-B26 battery pack and USB cord - Desert Tan	89028
ProTac Rail Mount HL-X Pro - Light Only - Includes Jack-Cap®, M-LOK mount and (2) CR123A lithium batteries - Black	88128
ProTac Rail Mount HL-X Pro USB - Light Only - Includes Jack-Cap®, M-LOK mount, (1) SL-B26 battery pack and USB cord - Black	88129

Size and Weight	Battery
5.43" (13.8 cm); CR123A: 6.6 oz (187.1g) // SL-B26: 7.2 oz (204.1g)	(2) CR123A lithium or (1) SL-B26 battery pack



IP54

With Remote Pressure Switch installed



IP67

With Standard button switch installed

NEW
COLOR



PROTAC® RAIL MOUNT HL-X LASER



High-lumen long gun light with integrated red aiming laser with windage and elevation adjustments

- Unique functionality with its double switches; push button tailcap or remote pressure switch
- Multi-fuel innovation; available as USB rechargeable system or lithium battery version
- Rail grabber is separate from light so you can rotate it within the clamp and maintain windage and elevation settings
- TEN-TAP® Programmable

	HIGH	LOW
LUMENS	1,000	60
CANDELA	18,200	1,100
DISTANCE	270m	66m
RUN TIME CR123A	1.25 hrs	20 hrs
RUN TIME SL-B26	1.5 hrs	23 hrs

Strobe runs 2.5 hours (CR123A) // 3.25 hours (SL-B26)

Description	Item #
ProTac Rail Mount HL-X Laser - Includes remote pressure switch, tailcap switch, remote retaining clips, mounting hardware and (2) CR123A lithium batteries - Black	88089
ProTac Rail Mount HL-X Laser USB - Includes remote pressure switch, tailcap switch, remote retaining clips, mounting hardware and (1) SL-B26 battery pack and USB cord - Black	88090

Size and Weight	Battery
6.56" (16.7 cm); SL-B26: 10.8 oz (306g) // CR123A: 10.3 oz (292g)	(2) CR123A lithium or (1) SL-B26 battery pack



IP54

With Remote Pressure Switch installed



IP67

With Standard button switch installed

PROTAC® RAIL MOUNT HL-X

High-lumen long gun light featuring a fixed mount for MIL-STD-1913 (Picatinny) rails or with M-LOK® mount allowing for alternative mounting options

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- TEN-TAP® Programmable

	HIGH	LOW
LUMENS	1,000	60
CANDELA	50,000	3,100
DISTANCE	447m	111m
RUN TIME CR123A	1.25 hrs	21 hrs
RUN TIME SL-B26	1.75 hrs	24 hrs

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)



Description	Item #
ProTac Rail Mount HL-X - Includes remote pressure switch, tailcap switch, mounting hardware, M-LOK® mount and (2) CR123A lithium batteries - Black	88066
ProTac Rail Mount HL-X USB - Includes remote switch, tail switch, remote retaining clips mounting hardware, M-LOK mount, (1) SL-B26 battery pack and USB cord - Black	88071

M-LOK® is a registered trademark of Magpul Industries Corp.

Size and Weight	Battery
5.43" (13.8 cm); CR123A: 6.4 oz (181.4g) // SL-B26: 6.9 oz (195.6g)	(2) CR123A lithium or (1) SL-B26 battery pack

PROTAC® RAIL MOUNT HP-X PRO



IPX4

With Remote Pressure Switch installed



IPX7

With Standard button switch installed

Long range, high-candela long gun light with Jack-Cap® switch

- Jack-Cap® tailcap switch (as shown in the image below) offers operational switch redundancy with both push-button operation or remote pressure switch operation
- TEN-TAP® Programmable



Description	Item #
ProTac Rail Mount HP-X Pro - System - Includes Jack-Cap tail cap switch, M-LOK mount, mounting hardware, Allen wrench, straight momentary pressure switch and (2) CR123A lithium batteries	89015
ProTac Rail Mount HP-X Pro USB - System - Includes Jack-Cap tail cap switch, M-LOK® mount, mounting hardware, Allen wrench, straight momentary pressure switch, (1) SL-B26 battery pack and USB-C cord - Black	89016
ProTac Rail Mount HP-X Pro USB - System - Includes Jack-Cap tail cap switch, M-LOK® mount, mounting hardware, Allen wrench, straight momentary pressure switch, (1) SL-B26 battery pack and USB-C cord - Desert Tan	89029
ProTac Rail Mount HP-X Pro - Light Only - Includes Jack-Cap tail cap switch, M-LOK mount, Allen wrench and (2) CR123A lithium batteries - Black	89017
ProTac Rail Mount HP-X Pro USB - Light Only - Includes Jack-Cap tailcap switch, M-LOK mount, Allen wrench, (1) SL-B26 battery pack and USB cord - Black	89018

Size and Weight	Battery
5.63" (14.3 cm); SL-B26: 7 oz (198g) // CR123A: 6.4 oz (181g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries

	HIGH	LOW
LUMENS	800	55
CANDELA	105,000	7,600
DISTANCE	648m	174m
RUN TIME SL-B26	2 hrs	26 hrs
RUN TIME CR123A	1.5 hrs	18 hrs

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

NEW

COLOR



PROTAC® 2.0 RAIL MOUNT



IPX4

With Remote Pressure Switch installed



IP67

With Standard Button Switch installed

High-performance tactical light that produces 2,000 lumens without sacrificing run time

- Rechargeable SL-B50 battery pack that charges inside the light using a USB-C cord
- MIL-STD 1913 or M-LOK® compatible rails
- TEN-TAP® Programmable

	HIGH	LOW
LUMENS	2,000	250
CANDELA	17,700	2,150
DISTANCE	266m	93m
RUN TIME	2.5 hrs	11 hrs

Strobe runs 4.5 hours

Description	Item #
ProTac 2.0 Rail Mount - System - Includes straight momentary pressure switch, (1) SL-B50 battery pack, mounting hardware, USB-C cord and M-LOK® mount - Black	89009
ProTac 2.0 Rail Mount - Light Only - Includes (1) SL-B50 battery pack, USB-C cord and M-LOK® mount - Black	89003

Size and Weight	Battery
6.3" (16 cm); 9.06 oz (257g)	(1) SL-B50 rechargeable battery pack





PROTAC® 2.0 RAIL MOUNT HP



High-performance tactical light offers a perfect blend of 2,000 lumens and 85,000 candela

- Powered by our proprietary SL-B50 rechargeable battery pack
- Charges inside the light, no need to remove from your weapon
- TEN-TAP® Programmable



	HIGH	LOW
LUMENS	2,000	250
CANDELA	85,000	11,500
DISTANCE	583m	214m
RUN TIME	2.5 hrs	11 hrs

Strobe runs 4.5 hours



Description	Item #
ProTac 2.0 Rail Mount HP - System - Includes straight momentary pressure switch, (1) SL-B50 battery pack, mounting hardware, USB-C cord and M-LOK® - Black	89014
ProTac 2.0 Rail Mount HP - Light Only - Includes (1) SL-B50 battery pack, USB-C cord and M-LOK mount - Black	89013

Size and Weight	Battery
6.3" (16 cm); 9.06 oz (257g)	(1) SL-B50 rechargeable battery pack

PROTAC® RAIL MOUNT VIR PRO



IPX4

With Remote Pressure Switch installed



IPX7

With Standard button switch installed

Rail mount VIR gun light delivers both white light and IR illumination, easily selectable via a head-mounted, mode selector switch

- Positional Head
- Jack-Cap® tailcap switch offers operational switch redundancy with both push-button operation or remote pressure switch operation
- Integrated IR to white light safety cutoff
- Integrated rail clamp attaches to MIL-STD-1913 Picatinny rail or M-LOK® compatible rails

White LED and 940nm iR LED



Mode Selector Switch



Jack-Cap®



Description	Item #
ProTac Rail Mount VIR Pro - Includes Jack Cap®, M-LOK® Kit, Momentary Switch, Hardware Kit, 2.5 mm Allen Wrench, and (2) CR123A lithium batteries - Black	88138
ProTac Rail Mount VIR USB Pro - Includes Jack Cap®, M-LOK® Kit, Momentary Switch, Hardware Kit, 2.5 mm Allen Wrench, (1) SL-B26 battery pack, 101.6 cm (40 in) USB Cord - Black	88139

M-LOK® is a registered trademark of Magpul Industries Corp.

	HIGH	MEDIUM	LOW	IR HIGH	IR LOW
LUMENS	1,100	540	120	2,300mW	600mW
CANDELA	40,000	19,000	4,200	---	---
DISTANCE	400m	276m	130m	---	---
RUN TIME SL-B26	2 hrs	3.75 hrs	14 hrs	2 hrs	9 hrs
RUN TIME CR123A	1.5 hrs	2.75 hrs	11 hrs	1.25 hrs	7.25 hrs

- TEN-TAP® Programmable:
- White light high only/IR high only (default)
 - White light medium only/IR high-low
 - White light low-high/IR low-high

Size and Weight	Battery
5.65" (14.4 cm); SL-B26: 8.8 oz (249g) // CR123A: 8.2 oz (231g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries



PROTAC RAIL MOUNT ACCESSORIES

DESCRIPTION	ITEM #	PROTAC RAIL MOUNT 1 RAIL MOUNT 2	PROTAC RAIL MOUNT HL-X	PROTAC RAIL MOUNT HL-X LASER	PROTAC RAIL MOUNT 1L-X SERIES	PROTAC RAIL MOUNT 1L-X PRO SERIES	PROTAC 2.0 RAIL MOUNT SERIES	PROTAC RAIL MOUNT HL-X PRO RAIL MOUNT HP-X PRO RAIL MOUNT VIR PRO
CR123A Lithium Batteries - 2pk	85175	√	√	√	√	√		√
CR123A Lithium Batteries - 6pk	85177	√	√	√	√	√		√
CR123A Lithium Batteries - 12pk	85179	√	√	√	√	√		√
CR123A Lithium Batteries - 400pk	85180	√	√	√	√	√		√
SL-B26 Battery Pack Charger Kit, USB (Includes (2) SL-B26 battery packs and USB cord)	22010		√	√				√
SL-B26 Battery Pack Charger Kit, 120V AC (Includes (2) SL-B26 battery packs and USB cord)	22011		√	√				√
8-Unit SL-B26 Bank Charger - 120V DC (For more information on SL-B26 Bank Charger, visit page 107)	20224		√	√				√
SL-B26 Battery Pack - 1pk	22101		√	√				√
SL-B50 Battery Pack - 1pk	22111						√	
SL-B9 Battery Pack - 2pk	20237				√	√		
120V AC USB Charge Cord	22071		√	√				
22" (55.88 cm) USB-C Cord	22084		√	√	√	√	√	√
Red Filter	69115	√						
Blue Filter	69116	√						
Green Filter	69117	√						
IR Filter	69118	√						
Opaque Filter	69124	√						
M-LOK® Mount	88300	√	√		√	√	√	√
Jack-Cap®	88130							√
ProTac® 2.0 RM Tail Switch	89020						√	
Remote Retaining Clips	88178	√	√	√		√	√	√
Remote Switch	88125			√				
Remote Switch	88098	√						
Straight Momentary Pressure Switch	69135					√	√	√
TLR Dual Remote Switch	69138					√	√	
Straight Latching Switch	89008					√	√	√





WEDGE® SERIES



Powerful, pocket friendly, rechargeable, everyday carry flashlight available in multiple colors

- Outfitted with an intuitive rotating thumb switch, providing tactile control over constant-on or THRO® modes (as shown in the image above)
- Ergonomic design fits comfortably in your hand
- Grooved for a suregrip

	THRO	CONSTANT-ON
LUMENS	1,000	300
CANDELA	3,000	1,200
DISTANCE	110m	69m
RUN TIME	35 sec	3 hrs



Description	Item #
Wedge - Includes USB-C cord, lanyard - Box - Black	88810
Wedge - Includes USB-C cord, lanyard - Box - Coyote	88811
Wedge - Includes USB-C cord, lanyard - Box - Red	88814
Wedge - Includes USB-C cord, lanyard - Box - Blue	88817
Wedge - Includes USB-C cord, lanyard - Box - Purple	88818
Wedge - Includes USB-C cord, lanyard - Box - Orange	88820
Wedge - Includes USB-C cord, lanyard - Box - Lime Green	88821



Battery charge indicator located in the on/off switch
Charge indication:

Red – Charging // Green – Charged
 Recharges in 3 hours

Size and Weight	Battery
5.46" (13.87 cm); 3.3 oz (93.5g)	Lithium Polymer

WEDGE® SL



Ultra-thin, unibody constructed, uniquely shaped EDC inspection flashlight

- Four LED Battery Status Indicator LED (Flashing: Charging // 4 Solid-Segment/ Stage Charge Indication shown in image below): 4 LEDs = 75%; 3 LEDs = 50-75%; 2 LEDs = 25-50%; 1 LED = 10-25%
- Recharges in 4 hours
- TEN-TAP® programming switch allows user selection of high (factory default) or low intensity for constant on
- Aluminum body for strength and lightweight durability



	THRO	HIGH	LOW
LUMENS	500	100	50
CANDELA	1,600	300	150
DISTANCE	80m	35m	24m
RUN TIME	---	1.75 hrs	3.5 hrs

Description	Item #
Wedge SL - Includes Bite Boot - Black	88840
Wedge SL - Includes Bite Boot - Coyote	88841
Wedge SL - Includes Bite Boot - Silver	88842

Size and Weight	Battery
5.65" (14.36 cm); 1.14 oz (32.3g)	Lithium Polymer



WEDGE® XT



Ultra-compact everyday carry flashlight

- Push-button tail switch for one-handed operation
- FIVE-TAP® lockout system prevents accidental activation inside your pocket or bag
- TEN-TAP® Programmable

	HIGH	LOW
LUMENS	500	50
CANDELA	1,900	200
DISTANCE	87m	28m
RUN TIME	2 hrs	11 hrs

Description	Item #
Wedge XT - Includes USB-C cord, lanyard - Black	88812
Wedge XT - Includes USB-C cord, lanyard - Coyote	88813
Wedge XT - Includes USB-C cord, lanyard - Silver	88819

Size and Weight	Battery
4.25" (10.8 cm); 2.62 oz (74.3g)	Lithium Polymer



Charge indication LED:
Red – Charging; Green – Charged

Lithium polymer battery charges in 6 hours



PROTAC® SERIES

PROTAC® 1L-1AA



Ultra-compact, everyday carry flashlight

- TEN-TAP® Programmable
- Multi-fuel - accepts multiple battery sources

AA	HIGH	LOW
LUMENS	150	40
CANDELA	2,750	720
DISTANCE	105m	53m
RUN TIME Alkaline	1 hr 20 min	7.5 hrs
RUN TIME Lithium	4.25 hrs	14 hrs

Strobe runs 3.5 hours (Alkaline) // 8 hours (Lithium)

CR123A	HIGH	LOW
LUMENS	350	40
CANDELA	6,400	720
DISTANCE	160m	53m
RUN TIME	1.5 hrs	14 hrs

Strobe runs 3 hours

Description	Item #
ProTac 1L-1AA - Includes (1) AA alkaline and CR123A lithium batteries - Black	88061
ProTac 1L-1AA - Includes (1) AA alkaline and CR123A lithium batteries - Coyote	88073

Size and Weight	Battery
4.25" (10.8 cm); CR123A: 2.5 oz (71g) // Alkaline: 2.8 oz (79g) // Lithium: 2.4 oz (68g)	(1) CR123A lithium, (1) AA alkaline or (1) AA lithium



PROTAC® 2.0



IP67

High-performance light that produces 2,000 lumens without sacrificing run time

- TEN-TAP® Programmable
- Durable anodized machined aircraft aluminum construction
- Battery recharges inside the light

	HIGH	MEDIUM	LOW
LUMENS	2,000	570	100
CANDELA	17,300	5,000	890
DISTANCE	262m	142m	60m
RUN TIME	2.5 hrs	4.5 hrs	25 hrs

Strobe runs 4 hours 25 minutes



Slide sleeve back to access USB-C port.

SL-B50 battery pack charges in 6 hours.

Description	Item #
ProTac 2.0 - Includes (1) SL-B50 battery pack, USB-C cord and nylon holster - Black	89000

Size and Weight	Battery
6.1" (15.49 cm); 8.25 oz (234g)	(1) SL-B50 battery pack

PROTAC® 2.0 HP



IP67

High-candela flashlight strikes the ideal balance between candela and lumens, ensuring both reach and brightness without compromise

- TEN-TAP® Programmable
- One-handed option of momentary, variable intensity or strobe mode
- Slide sleeve back to charge battery while inside the light; fully recharges in 6 hours

	HIGH	MEDIUM	LOW
LUMENS	2,000	550	100
CANDELA	85,000	22,500	4,400
DISTANCE	583m	300m	132m
RUN TIME	2.5 hrs	5 hrs	31 hrs

Strobe runs 2 hours



Slide sleeve back to access USB-C port.

SL-B50 battery pack charges in 6 hours.

Description	Item #
ProTac 2.0 HP - Includes (1) SL-B50 battery pack, USB-C cord and nylon holster - Black	89023

Size and Weight	Battery
6.1" (15.49 cm); 8.25 oz (234g)	(1) SL-B50 battery pack

PROTAC® 2AA-X



Multi-fuel, personal carry tactical flashlight

- TEN-TAP® Programmable
- About the size of a marker, it conveniently fits in your pocket
- Multi-function, push-button tail switch

Lithium Polymer	HIGH	LOW
LUMENS	550	40
CANDELA	10,250	740
DISTANCE	203m	54m
RUN TIME	2.25 hrs	16 hrs

Strobe runs 4.5 hours

AA	HIGH	LOW
LUMENS	270	18
CANDELA	5,000	400
DISTANCE	141m	40m
RUN TIME	2.5 hrs	48 hrs

Strobe runs 5 hours


Description	Item #
ProTac 2AA-X USB - Includes lithium polymer battery pack, USB-C cord and holster - Black	88135
ProTac 2AA-X USB - Includes lithium polymer battery pack, USB-C cord and holster - Coyote	88137
ProTac 2AA-X - Includes (2) AA alkaline batteries and holster - Black	88033
ProTac 2AA-X - Includes (2) AA alkaline batteries and holster - Coyote	88072

Size and Weight	Battery
6" (15.3 cm); 3.5 oz. (99g)	Lithium Polymer USB rechargeable battery or (2) AA alkaline batteries



6.0 in. (15.3 cm)


INCLUDED



NYLON HOLSTER



(1) RECHARGEABLE LITHIUM POLYMER BATTERY



REMOVEABLE POCKET CLIP

PROTAC® 2L



IPX7

A compact and lightweight tactical light

- TEN-TAP® Programmable
- Maximum light output throughout battery life
- Push-button tail switch for momentary or constant on operation

	HIGH	LOW
LUMENS	350	30
CANDELA	6,300	600
DISTANCE	159m	49m
RUN TIME	3.25 hrs	35 hrs

Strobe runs 6 hours



Description	Item #
ProTac 2L - Includes (2) CR123A lithium batteries and holster - Black	88031

Size and Weight	Battery
4.77" (12.12 cm); 2.8 oz (79g)	(2) CR123A lithium batteries



PROTAC® 2L-X



IPX7

Multi-fuel tactical light

- Multi-battery versatility
- Push-button tail switch for momentary or constant on operation
- Pocket clip for convenience

Description	Item #
ProTac 2L-X - Includes (2) CR123A lithium batteries and holster - Clam - Black	88062
ProTac 2L-X - Includes (2) CR123A lithium batteries and holster - Box - Black	88063
ProTac 2L-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Clam - Black	88082
ProTac 2L-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Box - Black	88083

Size and Weight	Battery
5.14" (13 cm); SL-B26: 4.4 oz (125g) // CR123A: 3.9 oz (111g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries

	HIGH	LOW
LUMENS	500	40
CANDELA	6,800	600
DISTANCE	165m	49m
RUN TIME CR123A	2.75 hrs	30 hrs
RUN TIME SL-B26	3.25 hrs	30 hrs

Strobe runs 3.25 hours (CR123A) // 4.5 hours (SL-B26)



PROTAC® HL-X



Multi-fuel flashlight with a high-lumen beam

- TEN-TAP® Programmable
- Pocket clip for convenience
- Anti-roll head design

Description	Item #
ProTac HL-X - Includes (2) CR123A lithium batteries and holster - Box - Black	95313
ProTac HL-X - Includes (2) CR123A lithium batteries and holster - Clam - Black	88064
ProTac HL-X - Includes (2) CR123A lithium batteries and holster - Box - Black	88065
ProTac HL-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Box - Black	95314
ProTac HL-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Clam - Black	88084
ProTac HL-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Box - Black	88085

Size and Weight	Battery
5.43" (13.8 cm); SL-B26: 6.2 oz (176g) // CR123A: 5.7 oz (162g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries

CR123A	HIGH	MEDIUM	LOW
LUMENS	1,000	400	65
CANDELA	27,100	10,000	1,600
DISTANCE	330m	200m	80m
RUN TIME	1.25 hrs	3 hrs	20 hrs

Strobe runs 2.5 hours



SL-B26	HIGH	MEDIUM	LOW
LUMENS	1,300	420	70
CANDELA	35,000	11,000	1,800
DISTANCE	374m	210m	85m
RUN TIME	1.5 hrs	3.75 hrs	25 hrs

Strobe runs 3.25 hours



PROTAC® HP-X



Unique combination of compact size, high candela and long distance performance flashlight

- Extreme beam reach to penetrate through smoke, fog and photonic barriers at long distances
- TEN-TAP® Programmable
- Multi-fuel - SL-B26 battery pack or CR123A lithium batteries

	HIGH	MEDIUM	LOW
LUMENS	800	240	45
CANDELA	105,000	34,000	6,300
DISTANCE	648m	369m	159m
RUN TIME CR123A	1.5 hrs	4.25 hrs	24 hrs
RUN TIME SL-B26	2 hrs	5 hrs	31 hrs

Strobe runs 3 hours (CR123A) // 4.25 hours (SL-B26)



Description	Item #
ProTac HP-X - Includes (2) CR123A lithium batteries and holster - Box - Black	89021
ProTac HP-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Box - Black	89022

Size and Weight	Battery
5.55" (14.1 cm); SL-B26: 5.9 oz (168g) // CR123A: 5.4 oz (154g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries



PROTAC® HL



A tactical flashlight that produces a high-lumen beam

- TEN-TAP® Programmable
- Pocket clip for convenience
- Anti roll head design

	HIGH	LOW
LUMENS	750	35
CANDELA	18,300	900
DISTANCE	270m	60m
RUN TIME	1.25 hrs	18 hrs

Strobe runs 2.5 hours



Description	Item #
ProTac HL - Includes (2) lithium batteries and holster - Black	88040

Size and Weight	Battery
5.4" (13.7 cm); 5.6 oz (158g)	(2) CR123A lithium batteries

PROTAC® 90X



Multi-fuel, right angle, everyday carry light

- Features a right angle head that gives extra lighting capability
- TEN-TAP® Programmable
- Carry in your hand, attach to belt, harnesses or other gear

	HIGH	MEDIUM	LOW
LUMENS	1,000	300	65
CANDELA	7,350	2,060	450
DISTANCE	171m	91m	42m
RUN TIME CR123A	2.5 hrs	4 hrs	21 hrs
RUN TIME SL-B26	1.75 hrs	4.75 hrs	24 hrs

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

Description	Item #
ProTac 90X - Includes (2) CR123A lithium batteries and holster - Black	88094
ProTac 90X USB - Includes (1) SL-B26 battery pack and holster - Black	88095

Size and Weight	Battery
4.39" (11.1 cm); SL-B26: 4.9 oz (139g) // CR123A: 4.4 oz (125g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries



PROTAC HL® 6



Full-size, heavy duty flashlight delivers powerhouse illumination with 2 hours of run time

- TEN-TAP® Programmable
- Recharges in 5 hours
- Sure grip rubber sleeve provides thermal insulation

Description	Item #
ProTac HL 6 - Includes 120V AC Adapter, (2) SL-B48 battery packs, "Y" USB-C cord and wrist lanyard - Black	88131
ProTac HL 6 - Includes (2) SL-B48 battery packs, "Y" USB-C cord and wrist lanyard - Black	88132

Size and Weight	Battery
10.5" (26.6 cm); 1.3 lbs (590g)	(2) SL-B48 battery pack

	HIGH	MEDIUM	LOW
LUMENS	5,300	1,500	450
CANDELA	80,000	23,000	6,700
DISTANCE	566m	303m	164m
RUN TIME	2 hrs	3.75 hrs	12.5 hrs

Strobe runs 4 hours



PROTAC HL® 5-X



Super-bright, heavy-duty multi-fuel flashlight

- Features a sure grip rubber sleeve
- Includes lanyard to ensure you'll never lose your grip
- TEN-TAP® Programmable

Description	Item #
ProTac HL 5-X - Includes (4) CR123A lithium batteries and wrist lanyard - Box - Black	88074
ProTac HL 5-X USB - Includes (2) SL-B26 battery packs, "Y" USB Cord and wrist lanyard - Box - Black	88081

Size and Weight	Battery
9.53" (23.65 cm); SL-B26: 1 lb 3.4 oz (550g) // CR123A: 1 lb 2.4 oz (522g)	(4) CR123A lithium batteries or (2) SL-B26 battery packs

SL-B26	HIGH	MEDIUM	LOW
LUMENS	3,500	1,000	250
CANDELA	51,000	14,100	3,620
DISTANCE	452m	237m	120m
RUN TIME	1.25 hrs	3 hrs	11.5 hrs

Strobe runs 1.25 hours

CR123A	HIGH	MEDIUM	LOW
LUMENS	2,500	1,000	250
CANDELA	37,000	14,100	3,620
DISTANCE	385m	237m	120m
RUN TIME	1.5 hrs	2.5 hrs	10.5 hrs

Strobe runs 1.5 hours



PROTAC HPL® USB



IPX4

High performance, high-candela hand held flashlight

- Self-adjusting battery cradle secures multiple battery sizes and eliminates battery rattle
- USB rechargeable (battery charges in the light)
- TEN-TAP® Programmable

	HIGH	MEDIUM	LOW
LUMENS	1,000	400	65
CANDELA	35,000	14,100	2,250
DISTANCE	374m	237m	95m
RUN TIME	1.5 hrs	3.5 hrs	24 hrs

Strobe runs 3 hours

Description	Item #
ProTac HPL USB - Includes lithium-ion battery, USB cord and holster - Clam - Black	88076
ProTac HPL USB - Includes lithium-ion battery, USB cord and holster - Box - Black	88077

Size and Weight	Battery
7.08" (18 cm); 9.24 oz (262g)	Lithium-ion uses the same battery (#74175) as the Strion, also accepts SL-B26 battery pack or (2) CR123A lithium batteries



PROTAC HL® USB



IPX4

High-lumen, USB rechargeable tactical light

- Self-adjusting battery cradle secures multiple battery sizes and eliminates battery rattle
- TEN-TAP® Programmable

	HIGH	MEDIUM	LOW
LUMENS	1,000	380	65
CANDELA	12,000	4,420	700
DISTANCE	219m	133m	53m
RUN TIME	1.5 hrs	3.5 hrs	23 hrs

Strobe runs 1.5 hours


Description	Item #
ProTac HL USB - 120V AC/12V DC and holster - Black	88054
ProTac HL USB - Includes USB cord - Black	88052

Size and Weight	Battery
6.5" (16.5 cm); 7.2 oz (204g)	Lithium-ion battery - uses the same battery (#74175) as the Strion; also SL-B26 battery pack or (2) CR123A lithium



PROTAC® // POLYTAC® ACCESSORIES

DESCRIPTION	ITEM #	PROTAC 1L-1AA	PROTAC 2AA-X USB	PROTAC 2.0 SERIES	PROTAC 2L	PROTAC 2L-X	PROTAC HL	PROTAC HL USB	PROTAC HL-X	PROTAC HPL USB	PROTAC HL 6	POLYTAC 1X	POLYTAC X	POLYTAC X
CR123A Batteries - 2pk	85175	✓			✓	✓	✓	✓	✓	✓		✓	✓	✓
CR123A Batteries - 6pk	85180	✓			✓	✓	✓	✓	✓	✓		✓	✓	✓
CR123A Batteries - 12pk	85177	✓			✓	✓	✓	✓	✓	✓		✓	✓	✓
CR123A Batteries - 400pk	85179	✓			✓	✓	✓	✓	✓	✓		✓	✓	✓
SL-B26 Battery Pack - 1pk	22101					✓	✓	✓	✓	✓				✓
SL-B50 Battery Pack - 1pk	22111			✓										
Lithium Polymer Battery Pack	88136		✓											
SL-B48 Battery Pack - 2pk	88133										✓			
SL-B9 Battery Pack	20237											✓		
Lithium-ion Battery	74175						✓	✓		✓				
Li-Ion USB Battery Charge Cradle	22100					✓		✓	✓	✓				✓
120V AC Charge Cord	22071					✓			✓	✓				✓
22" (55.88 cm) USB-C Cord	22084		✓	✓		✓			✓	✓				✓
"Y" USB-C Cord	22090										✓			
Nylon Holster	88036	✓			✓									
Nylon Holster	88038		✓											
Nylon Holster	88043						✓		✓					
Nylon Holster	88086			✓										
Nylon Holster	85905											✓	✓	✓
Tactical Holster	88051						✓	✓						
Helmet Mount	68085												✓	✓
Poly Mount Kit	68089												✓	✓
Filter - Red	69115											✓		✓
Filter - Blue	69116											✓		✓
Filter - Green	69117											✓		✓
Filter - IR	69118											✓		✓
Flip Lens - Red	88115												✓	✓
Flip Lens - Blue	85116												✓	✓
Flip Lens - Green	85117												✓	✓
Flip Lens - IR	74039												✓	✓
Red Safety Wand	88057			✓			✓	✓	✓					
Red Safety Wand	61311							✓				✓		
Red Safety Wand	74903												✓	✓
Yellow Safety Wand	74904												✓	✓
Glow in the Dark Safety Wand	74913												✓	✓
Rubber Helmet Strap	99075												✓	✓

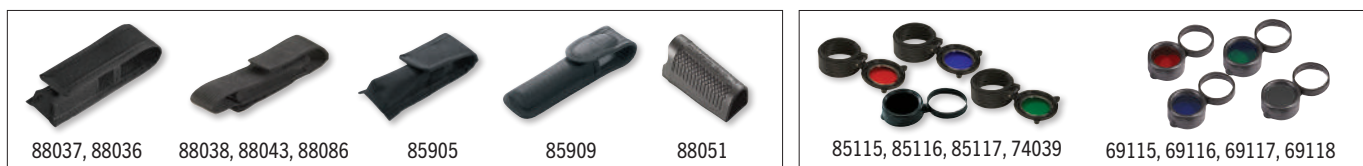

STREAMLIGHT®



POLYTAC® 1X

POLYTAC® 1X



Professional quality, multi-fuel flashlight with polymer construction for lightweight durability

- SL-B9 recharges in 2.5 hours via USB-C cord
- TEN-TAP® Programmable
- Removable, two way pocket clip

	SL-B9		CR123A		AA	
	HIGH	LOW	HIGH	LOW	HIGH	LOW
LUMENS	500	40	350	40	150	40
CANDELA	18,000	1,000	12,000	1,000	5,000	1,000
DISTANCE	268m	63m	219m	63m	141m	63m
RUN TIME	1 hrs	8 hrs	1.5 hrs	14 hrs	5 hrs	14 hrs

Strobe runs SL-B9: 1.75 hours // CR123A: 2.25 hours // AA: 7 hours



Description	Item #	COO	TAA
PolyTac 1X - Includes (1) CR123A lithium and (1) AA alkaline battery - Black	86000	US	YES
PolyTac 1X - Includes (1) CR123A lithium and (1) AA alkaline battery - Yellow	86002	US	YES
PolyTac 1X USB - Includes (1) SL-B9 battery pack - Black	86001	US	YES
PolyTac 1X USB - Includes (1) SL-B9 battery pack - Yellow	86003	US	YES

Size and Weight

4.71" (11.96 cm); SL-B9: 3.03 oz (85.9g) // CR123A: 2.93 oz (83.1g) // AA: 3.2 oz (90.7g)

Battery

(1) SL-B9 battery pack or (1) CR123A lithium battery



POLYTAC® X



Rugged, multi-fuel flashlight with polymer construction

- High-impact, super-tough nylon polymer with “rocky stipple” texture for a sure grip
- TEN-TAP® Programmable
- Removable, multi-position pocket clip

	HIGH	MEDIUM	LOW
LUMENS	600	260	35
CANDELA	11,485	4,930	675
DISTANCE	205m	135m	50m
RUN TIME CR123A	2.75 hrs	5.5 hrs	34 hrs
RUN TIME SL-B26	3.5 hrs	5.75 hrs	36 hrs

Strobe runs 5.5 hours (CR123A) // 8 hours (SL-B26)



Description	Clam	Box
PolyTac X - Includes (2) CR123A lithium batteries - Black	88600	88603
PolyTac X - Includes (2) CR123A lithium batteries - Yellow	88601	88604
PolyTac X - Includes (2) CR123A lithium batteries - Coyote	88602	88605
PolyTac X USB - Includes (1) SL-B26 battery pack and USB cord - Black	88610	88613
PolyTac X USB - Includes (1) SL-B26 battery pack and USB cord - Yellow	88611	88614
PolyTac X USB - Includes (1) SL-B26 battery pack and USB cord - Coyote	88612	88615

NFPA

Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)

Size and Weight

5.46" (13.87 cm); SL-B26: 4.9 oz (139g) // CR123A: 4.4 oz (125g)

Battery

(1) SL-B26 battery pack or
(2) CR123A lithium batteries

POLYTAC 90[®] X



Flexible, rugged flashlight with a right angled head

- Durable construction
- Integrated carabiner style D-ring for a variety of attachment methods
- Multi-fuel with built in battery life indicator

	HIGH	LOW
LUMENS	500	85
CANDELA	7,000	1,050
DISTANCE	167m	64m
RUN TIME CR123A	2.5 hrs	12 hrs
RUN TIME SL-B26	3.75 hrs	19 hrs

Description	Orange	Yellow	Black
PolyTac 90 X - Includes (2) CR123A lithium batteries	88834	88831	88830
PolyTac 90 X - Includes (2) CR123A lithium batteries and Gear Keeper	88832	--	--
PolyTac 90 X USB - Includes (1) SL-B26 battery pack and USB cord	88838	88836	88835
PolyTac 90 X USB - Includes (1) SL-B26 battery pack, Gear Keeper and USB cord	88837	--	--

Size and Weight	Battery
4.43" (11.25 cm); SL-B26: 4.8 oz (136g) // CR123A: 4.3 oz (122g)	(1) SL-B26 battery pack; or (2) CR123A lithium batteries



NFPA

Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)

POLYTAC[®]



All purpose flashlight designed for the broadest range of lighting applications at the best value

- Superior grip texture for comfortable/slip resistant feel
- TEN-TAP[®] Programmable
- Maximum light output throughout battery life

Description	Item #
PolyTac - Includes (2) CR123A lithium batteries - Black	88850
PolyTac - Includes (2) CR123A lithium batteries - Coyote	88851
PolyTac - Includes (2) CR123A lithium batteries - Yellow	88853

Size and Weight	Battery
5.34" (13.56 cm); 4.2 oz (121g)	(2) CR123A lithium batteries

	HIGH	MEDIUM	LOW
LUMENS	600	260	35
CANDELA	11,500	4,900	675
DISTANCE	214m	140m	52m
RUN TIME	2.75 hrs	5.5 hrs	34 hrs

Strobe runs 5.5 hours



NFPA

Meets requirements of NFPA 1970-14.2 (2025)

IMPROVE SUSTAINABILITY & LOWER COST THROUGH STREAMLIGHT RECHARGEABILITY

Switching just one alkaline battery powered flashlight to a Streamlight rechargeable can save hundreds of pounds of carbon emissions and chemical battery waste per year.

99%

Carbon Footprint Reduction
Switching from AA Alkaline to
Rechargeable

20%

Life Cycle Cost Savings in
the First Year

42 LBS.

Chemical Battery Waste
Spared from Landfills

SL-B50[®] PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK


The battery that was designed for select Streamlight products

- Features USB-C input and charge status indicators; recharges in 6 hours
- Integrated safety circuit protects battery from overcharge



Description	Item #
SL-B50 Li-Ion USB rechargeable battery pack - 1pk	22111
SL-B50 Li-Ion USB rechargeable battery pack - 2pk	22112
22" (55.88 cm) USB-C Cord	22084

Size and Weight	Battery
3.26" (8.28 cm); 3 oz (85g)	3.6V, 4900mAh protected lithium-ion USB rechargeable battery pack

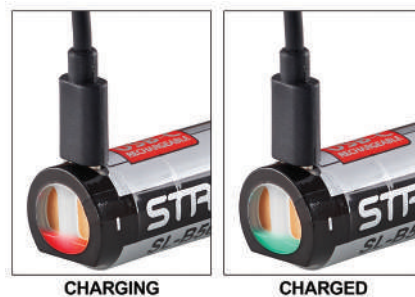


SL-B26[®] PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK

The battery that transforms multi-fuel, high performance lighting tools into rechargeable systems

- Features USB-C input and charge status indicators; recharges in 5 hours
- Integrated safety circuit protects battery from overcharge
- Charge via USB source or optional charge cradle

Description	Item #
SL-B26 Li-Ion USB Rechargeable Battery Pack - 1pk	22101
SL-B26 Li-Ion USB Rechargeable Battery Pack - 2pk	22102
SL-B26 Li-Ion USB Rechargeable Battery Pack - 2pk - Box	22104
SL-B26 Li-Ion USB Rechargeable Battery Pack - 8pk	22105
SL-B26 Charge Cradle	22100
SL-B26 Charger Kit - Includes USB Cord and (2) SL-B26 battery packs	22010
SL-B26 Charger Kit - Includes 120V AC and (2) SL-B26 battery packs	22011
40" (106.1 cm) USB Cord - for use with the charger kit	22070
22" (55.88 cm) USB Cord - for use with the charger kit	22081
40" (106.1 cm) USB-C Cord - for use with the SL-B26 battery pack	22091
22" (55.88 cm) USB-C Cord - for use with the SL-B26 battery pack	22084

Size and Weight	Battery
2.75" (7 cm); 1.7 oz (48g) - Battery	2600mAh SL-B26 protected
4.5" (11.4 cm); 2.4 oz (68g) - Cradle	Li-Ion USB rechargeable battery pack

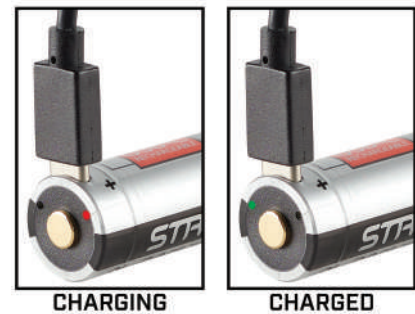

Charge status LEDs:
Red = charging Green = charged



EIGHT-UNIT SL-B26[®] BANK CHARGER

Charge up to eight batteries with Streamlight's lithium-ion bank charger

- Charge indicators over each battery; recharges in 5.25 hours
- Each charge bay securely holds the battery in place
- Ideal for mounting on trucks; 1" (2.54 cm) low profile housing

Description	Item #
8-Unit SL-B26 Bank Charger - 120V AC	20221
8-Unit SL-B26 Bank Charger - 12V DC	20220
8-Unit SL-B26 Bank Charger - Includes (8) SL-B26 batteries - 120V AC	20224
8-Unit SL-B26 Bank Charger - Includes (8) SL-B26 batteries - 12V DC	20223
120V AC Cord	44909
12V DC Cord	44923

Size and Weight
10.45 x 4.74 x 1 in (26.54 x 12.06 x 2.54 cm)
7.6 oz (216g) with batteries // 20.88 oz (592g) without batteries



NFPA

Meets requirements of
NFPA 1900-11.1.11.2 (2024);
mounted in upright position



SIDEWINDER® SERIES

SIDEWINDER STALK®



IP67


Military helmet light system with flexible stalk

- Provides ultimate maneuverability, multiple mounting options, and a flexible stalk to aim the beam
- Features white, IR, red, blue, and green LEDs – all located in the head mounted on a flexible stalk – each with low, medium, high, and strobe modes along with an additional IR/IFF beacon
- A separate Identification Friend or Foe (IFF) switch lets you use both the main light and IFF when needed



Thumb Screw to lock into ARC rail slot

White, red, green, blue and IR LEDs

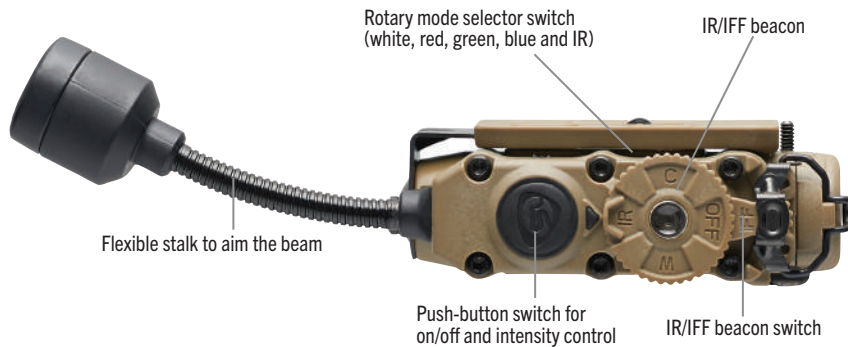

Rotary mode selector switch (white, red, green, blue and IR)

IR/IFF beacon

Flexible stalk to aim the beam

Push-button switch for on/off and intensity control

IR/IFF beacon switch



The Sidewinder Stalk can be configured to mount on any type of combat, vehicle crew or aviation helmet system and/or MOLLE vest platform, or be directly attached to the brim of a patrol cap.

#14303 - Sidewinder Stalk Helmet Clip

Durable belt/clothing clip with integral helmet mount features



#14304 - Sidewinder Stalk ARC Rail Clip

ARC Rail Clip



#14305 - Sidewinder Stalk ARC Rail Mount

Hook and loop adapter plate



High 100% Output - CR123A

	WHITE LED	IR LED	RED LED	BLUE LED	GREEN LED	3535 IFF IR IED
LUMENS	76	5.0 lmW/sr (min) radiant intensity	9	8	20	5.0 lmW/sr (min) radiant intensity
DISTANCE	28m	---	7m	8m	12m	---
RUN TIME	5.6 hrs	32 hrs	19 hrs	13 hrs	13 hrs	21 hrs

High 100% Output - AA LITHIUM/ALKALINE

	WHITE LED	IR LED	RED LED	BLUE LED	GREEN LED	3535 IFF IR IED
LUMENS	57	5.0 lmW/sr (min) radiant intensity	9	8	20	5.0 lmW/sr (min) radiant intensity
DISTANCE	23m	---	7m	8m	12m	---
RUN TIME Lithium	6 hrs	33 hrs	19 hrs	13 hrs	13 hrs	32 hrs
RUN TIME Alkaline	3.8 hrs	20 hrs	10 hrs	6 hrs	5 hrs	19 hrs

Description	Item #
Sidewinder Stalk - Includes helmet clip, (1) CR123A and (1) AA alkaline batteries - Coyote - Mailer	14300
Sidewinder Stalk - Includes helmet clip, (1) CR123A and (1) AA alkaline batteries - Black - Mailer	14310
Sidewinder Stalk - Includes helmet clip, ARC rail mount and assembly, (1) CR123A and (1) AA alkaline battery - Coyote - Mailer	14301
Sidewinder Stalk - Includes helmet clip, ARC rail mount and assembly, (1) CR123A and (1) AA alkaline battery - Black - Mailer	14311
Sidewinder Stalk - Includes helmet clip, E-Mount, (1) CR123A and (1) AA alkaline batteries - Coyote - Mailer	14302
Sidewinder Stalk - Includes helmet clip, (1) CR123A and (1) AA alkaline batteries - Coyote - Retail Box	14306
Sidewinder Stalk - Includes ARC rail mount and assembly, (1) CR123A and (1) AA alkaline batteries - Coyote - Retail Box	14307
Sidewinder Stalk - Includes helmet clip, E-Mount, (1) CR123A and (1) AA alkaline batteries - Coyote - Retail Box	14308

Size and Weight	Battery
5.5" (14 cm); AA battery w/Loop and Hook Adapter: 2.88 oz (81.65g) // CR123A battery w/Loop and Hook Adapter: 3.2 oz (90.7g)	(1) AA alkaline or lithium or (1) CR123A lithium batteries

SIDEWINDER STALK BATTERY RUN TIME				
CR123A LITHIUM BATTERY				
LED	LOW	MEDIUM	HIGH	STROBE
WHITE	95 hrs	15 hrs	5.6 hrs	11 hrs
RED	112 hrs	36 hrs	19 hrs	34 hrs
GREEN	80 hrs	27 hrs	13 hrs	25 hrs
BLUE	80 hrs	27 hrs	13 hrs	25 hrs
IR	174 hrs	57 hrs	32 hrs	61 hrs
IR W/ IFF BEACON	150 hrs	40 hrs	21 hrs	43 hrs
AA LITHIUM / ALKALINE BATTERY				
WHITE	79 hrs (lith) 66 hrs (alk)	16 hrs (lith) 8 hrs (alk)	6 hrs (lith) 3.8 hrs (alk)	11 hrs (lith) 5.5 hrs (alk)
RED	109 hrs (lith) 85 hrs (alk)	36 hrs (lith) 24 hrs (alk)	19 hrs (lith) 10 hrs (alk)	36 hrs (lith) 25 hrs (alk)
GREEN	84 hrs (lith) 55 hrs (alk)	26 hrs (lith) 15 hrs (alk)	13 hrs (lith) 5 hrs (alk)	23 hrs (lith) 17 hrs (alk)
BLUE	77 hrs (lith) 61 hrs (alk)	25 hrs (lith) 16 hrs (alk)	13 hrs (lith) 6 hrs (alk)	25 hrs (lith) 18 hrs (alk)
IR	173 hrs (lith) 145 hrs (alk)	55 hrs (lith) 39 hrs (alk)	33 hrs (lith) 20 hrs (alk)	60 hrs (lith) 41 hrs (alk)
IR W/ IFF BEACON	187 hrs (lith) 115 hrs (alk)	51 hrs (lith) 38 hrs (alk)	32 hrs (lith) 19 hrs (alk)	47 hrs (lith) 35 hrs (alk)

SIDEWINDER® X



Multi-fuel, high-output military light with 185° tilting head

- Anti-reflective coated faceplate to eliminate signature from direct and ambient light sources
- Pull-to-turn locking rotary knob prevents accidental mode changes
- Cord attachment holes on body, capable of supporting 50 lbs. of load
- Fits existing Sidewinder helmet mounts and adapters

	HIGH	MEDIUM 2	MEDIUM 2	LOW
LUMENS	275	80	35	5
CANDELA	3,200	900	400	50
DISTANCE	113m	60m	40m	14m
RUN TIME Alkaline	4.75 hrs	13 hrs	30 hrs	150+ hrs
RUN TIME CR123A	2.75 hrs	8 hrs	19 hrs	100+ hrs

Strobe runs 10.5 hours (AA) // 5.75 hours (CR123A)



MILITARY MODEL





AVIATION MODEL



USER CONFIGURABLE MODEL



(user chooses between red, green, or blue)

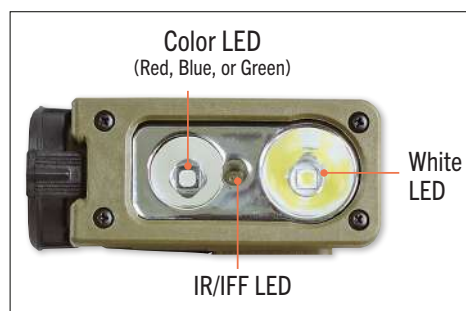

Push button on/off switch and rotary selector knob

Gear clip with integrated helmet mount features

Multiple mounting options for your helmet



Description	Item #
Sidewinder X - UC (User Configurable) Model - Includes (2) AA alkaline batteries - Coyote	14803
Sidewinder X - Military Model - Includes E-Mount and (2) AA alkaline batteries - Coyote	14800
Sidewinder X - Military Model - Includes (2) AA alkaline batteries - Coyote	14801
Sidewinder X - Aviation Model - Includes MOLLE retainer and (2) AA alkaline batteries - Coyote	14802

****Military Model: white, red, blue IR LEDs // Aviation Model: white, green, blue IR LEDs // UC Model: user chooses between red, green, or blue**

Size and Weight	Battery
2.4" (11.7 cm); CR123A: 3.3 oz (93.6g) // AA: 4.4 oz (124.7g)	(2) AA alkaline batteries or (1) CR123A lithium for extended operation in extreme temps (-40°F to +150°F)

IR & Color LEDs					
		IR	RED	BLUE	GREEN
HIGH MODE	LUMENS	50mW	6.5	2.0	8.0
	CANDELA	---	40	12	83
	DISTANCE	---	13m	7m	18m
	RUN TIME Alkaline	40 hrs	50 hrs		
	RUN TIME CR123A	20 hrs	30 hrs		
LOWER MODE	MED 2 (60%)	130 hrs (AA) 65 hrs (CR123A)	100 hrs (AA) // 70 hrs (CR123A)		
	MED 1 (25%)	330 hrs (AA) 170 hrs (CR123A)	250 hrs (AA) // 150 hrs (CR123A)		
	LOW (5%)	600+ hrs (AA) 300+ hrs (CR123A)	300+ hrs (AA) // 200+ hrs (CR123A)		
	STROBE	100+ hrs (AA) // 50+ hrs (CR123A)			





SIDEWINDER BOOT®



Durable, hands-free task flashlight used as a standard light for boot camp, recruit/basic training and wherever extra military instruction occurs

- Super-tough, high-impact polymer case that's durable and weather resistant
- Includes an integrated red filter that slides into place when needed



Description	Item #
Sidewinder Boot - Includes (2) AA alkaline batteries - Coyote	14975
Size and Weight	Battery
4.29" (10.9 cm); Lithium: 2.88 oz (82g) // Alkaline: 3.52 oz (100g)	(2) AA alkaline or AA lithium

	HIGH	LOW
LUMENS	55	7
CANDELA	1000	140
DISTANCE	63m	24m
RUN TIME	8 hrs	90 hrs

SIDEWINDER COMPACT® III



Extremely versatile military light with 185° tilting head for multiple tasks

- White, red, blue, green and IR LEDs (see below for specific model)
- Fits in the palm of your hand or clips to MOLLE vest, belt, hat or pocket
- Cord attachment holes on body, capable of supporting 50 lbs. of load
- Meets MIL-STD-810H, METHOD 512.4



Optional helmet mount accessories available

Description	Item #
Sidewinder Compact III User Configurable (UC) Model - Includes high offset ARC rail mount, (1) AA alkaline battery and (1) CR123A lithium battery - Coyote	14210
Sidewinder Compact III User Configurable (UC) Model - Includes Hook & Loop Mount, headstrap, (1) AA alkaline battery and (1) CR123A lithium battery - Coyote	14211
Sidewinder Compact III User Configurable (UC) Model - Includes E-Mount, headstrap, (1) AA alkaline battery and (1) CR123A lithium battery - Coyote	14519
Sidewinder Compact III User Configurable (UC) Model - Includes (1) AA alkaline battery and (1) CR123A lithium battery - Coyote	14213
Sidewinder Compact III Military Model - Includes E-mount, (1) AA alkaline battery and (1) CR123A lithium battery - Coyote	14510
Sidewinder Compact III Military Model - Includes E-mount, headstrap, (1) AA alkaline battery and (1) CR123A lithium battery - Coyote	14513
Sidewinder Compact III Military Model - Includes (1) AA alkaline battery and (1) CR123A lithium battery - Coyote	14516
Sidewinder Compact III Aviation Model - Includes NVG mount (works with HGU-84 rotary wing air crew helmets), (1) AA alkaline battery and (1) CR123A lithium battery - Coyote	14533

****Military Model: white, red, blue IR LEDs // Aviation Model: white, green, blue IR LEDs // UC Model: user chooses between red, green, or blue**

Size and Weight	Battery
2" (5.1 cm); AA: 3 oz (85g) // CR123A: 2.7 oz (76.5g)	(1) CR123A lithium, (1) AA alkaline, or (1) AA lithium battery

	Alkaline White LED				CR123A White LED			
	HIGH	MED 2	MED 1	LOW	HIGH	MED 2	MED 1	LOW
LUMENS	140	85	35	4	275	80	35	5
CANDELA	1,800	1,000	450	60	3,200	900	400	50
DISTANCE	85m	63m	42m	15m	113m	60m	40m	14m
RUN TIME	4 hrs	6 hrs	10 hrs	70+ hrs	2.75 hrs	8 hrs	19 hrs	100+ hrs

Strobe runs 8 hrs (Alkaline) // 5.75 hrs (CR123A)

		IR and Color LEDs			
		IR	RED	BLUE	GREEN
HIGH MODE	LUMENS	50mW	6.5	2.0	8.0
	CANDELA	---	40	12	83
	DISTANCE	---	13m	7m	18m
	RUN TIME	20 hrs (AA) 20 hrs (CR123A)	25 hrs (AA) // 30 hrs (CR123A)		
LOWER MODE	MED 2 (60%)	65 hrs (AA) 65 hrs (CR123A)	45+ hrs (AA) // 70 hrs (CR123A)		
	MED 1 (25%)	150 hrs (AA) 170 hrs (CR123A)	110+ hrs (AA) // 150 hrs (CR123A)		
	LOW (5%)	250 hrs (AA) 300+ hrs (CR123A)	250+ hrs (AA) // 200+ hrs (CR123A)		
	STROBE	40+ hrs (AA) // 50+ hrs (CR123A)			

SIDEWINDER® ACCESSORIES

DESCRIPTION	ITEM #	SIDEWINDER X	SIDEWINDER COMPACT III	SIDEWINDER STALK	SIDEWINDER BOOT
Helmet Clip - Black	14303			√	
ARC Rail Clip - Coyote	14304			√	
ARC Rail Mount - Coyote	14305			√	
Rail Mount Adapter for Helmet - Coyote	14057	√	√	√	√
Hook and Loop Mount	14073	√	√	√	√
Contour ARC Rail Mount	14114	√	√	√	√
Sidewinder High Offset ARC Mount	14115	√	√	√	
Night Vision Goggle Mount - Tactical (works with DoD, NATO, and ISAF combat helmets)	14155	√	√	√	√
Night Vision Goggle Mount - Aviation (works with HGU-84 rotary wing air crew helmets)	14135	√	√	√	√
Elastic Headstrap	14059	√	√		√
E-Mount (ACH, ECH, MICH, LWH compatible)	14136	√	√	√	√
Paracord	14138	√	√		√
E-Mount Kit - Includes E-mount, headstrap, and MOLLE plate	14112	√	√		√
Rail Mount Kit - Includes rail mount, headstrap and MOLLE plate	14113	√	√		√
MOLLE Retainer Replacement	14030	√	√		
CR123A Lithium Batteries - 2 pack	85175	√	√	√	
CR123A Lithium Batteries - 6 pack	85180	√	√	√	
CR123A Lithium Batteries - 12 pack	85177	√	√	√	
CR123A Lithium Batteries - 400 pack	85179	√	√	√	





HEADLAMP SERIES

ENDURO® PRO USB



IPX4

Rechargeable headlamp with spot and flood beams

- Spot and flood modes- each with high, medium and low
- Multi-function switch remembers the last mode used
- Two mounting options for industrial hard hats - as shown below

Industrial model:

Two hard hat mounting options:

Rubber strap

3M® Dual Lock® for strapless mounting

Spot	HIGH	MEDIUM	LOW
LUMENS	200	90	25
CANDELA	2,080	890	250
DISTANCE	91m	60m	32m
RUN TIME	6.25 hrs	19 hrs	48 hrs



Description	Item #
Enduro Pro USB - Includes USB cord, elastic headstrap - Yellow	61435
Enduro Pro USB - Includes USB cord, elastic and hard hat strap and 3M® Dual Lock® - Yellow	61436

3M® and Dual Lock® are a registered Trademarks of the 3M Company

Size and Weight	Battery
2.19" (5.56 cm); 3.6 oz (102g)	Lithium polymer

Flood	HIGH	MEDIUM	LOW
LUMENS	145	50	15
CANDELA	220	80	30
DISTANCE	30m	18m	11m
RUN TIME	7 hrs	21 hrs	48 hrs

ENDURO® PRO



Compact, multi-purpose headlamp

- Spot and flood modes- each with high, medium and low
- Multi-function switch remembers the last mode used
- Coyote model features white and green LEDs; yellow model features white and red LEDs

Industrial model:

Two hard hat mounting options:

Rubber strap

3M® Dual Lock® for strapless mounting



Description	Item #
Enduro Pro - Includes (3) AAA alkaline batteries and elastic head strap - Clam - Yellow	61420
Enduro Pro - Includes (3) AAA alkaline batteries and elastic head strap - Box - Yellow	61421
Enduro Pro - Includes (3) AAA alkaline batteries and elastic head strap - Clam - Coyote	61425
Enduro Pro - Includes rubber and elastic straps, (3) AAA alkaline batteries and 3M® Dual® Lock - Box - Yellow	61422

3M® and Dual Lock® are registered Trademarks of the 3M Company

Size and Weight	Battery
2.19" (5.56 cm); Alkaline: 3.4 oz (96.38g) // Lithium: 3 oz (85.04g)	(3) AAA alkaline or lithium batteries


Spot	HIGH	MEDIUM	LOW
LUMENS	200	75	25
CANDELA	2,250	825	300
DISTANCE	95m	57m	35m
RUN TIME	6 hrs	14 hrs	38 hrs

Yellow Model:
White /Red LED



Coyote Model:
White /Green LED

Flood	HIGH	MEDIUM	LOW
LUMENS	135	45	15
CANDELA	210	80	20
DISTANCE	29m	18m	9m
RUN TIME	6 hrs	14 hrs	38 hrs

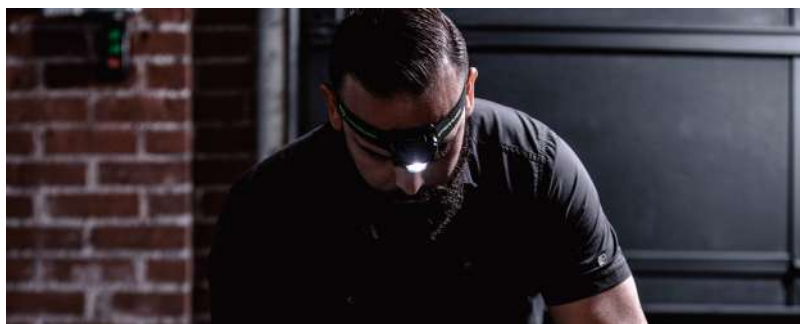

ENDURO®



Lightweight and super comfortable headlamp

- Low profile headlamp
- Integrated rubber/elastic head strap for versatility
- Unbreakable polycarbonate lens

Description	Item #
Enduro - Includes (2) AAA alkaline batteries, visor clip and elastic headstrap - Black	61400

Size and Weight	Battery
1.6" (4 cm); 2.75 oz (78.5g)	(2) AAA alkaline batteries

	HIGH	LOW
LUMENS	50	10
CANDELA	1,100	285
DISTANCE	66m	33m
RUN TIME	5.5 hrs	25 hrs





SL-SIDESADDLE® // SL-SIDESADDLE® USB



Universal helmet light designed to mount directly to a wide variety of head gear including hard hats, helmets and baseball hats

- Charge and/or replace the batteries without removing from the mount
- Use the “quick release” tab to detach the light for hand-held use while the strap system remains securely in place
- Universal strap leaves slots open/available to integrate with other accessories
- Integrated tail switch with blue LED for easy control and enhanced visibility
- Push-button switch with mode memory recalls your last setting



ALKALINE MODEL



USB MODEL



	SPOT		FLOOD		COMBO	
	HIGH	LOW	HIGH	LOW	HIGH	LOW
LUMENS	250	60	235	60	300	110
CANDELA	2,500	715	215	55	1,900	660
DISTANCE	100m	53m	29m	15m	87m	51m
RUN TIME	6.75 hrs	12 hrs	6.5 hrs	16 hrs	5 hrs	6.75 hrs

	SPOT		FLOOD		COMBO	
	HIGH	LOW	HIGH	LOW	HIGH	LOW
LUMENS	350	100	325	85	400	160
CANDELA	4,250	1,200	300	75	2,400	960
DISTANCE	130m	69m	35m	17m	98m	62m
RUN TIME	6.25 hrs	12 hrs	7 hrs	12 hrs	5 hrs	7 hrs

Description	Yellow	Black
SL-SideSaddle - Includes hard hat mount kit (baseplate, slot strap and universal Y-strap) and (3) AAA alkaline batteries	61630	61620
SL-SideSaddle Hat Light - Includes (3) AAA alkaline batteries and hat mount	61636	61626

Size and Weight	Battery
3" (7.6 cm); 3.4 oz (95g)	(3) AAA alkaline batteries

Description	Yellow	Black
SL-SideSaddle USB - Includes hard hat mount kit (baseplate, slot strap and universal Y-strap), USB-C cord and (1) lithium polymer battery	61631	61621
SL-SideSaddle USB Hat Light - Includes (1) lithium polymer battery, USB-C cord and hat mount	61637	61627

Size and Weight	Battery
3" (7.6 cm); 3.1 oz (88g)	(1) Lithium polymer battery




A UNIVERSAL FIT
SL-SIDESADDLE®,
ADAPTABLE. RELIABLE. HAT & HELMET COMPATIBLE.

Safety Helmets



Accessories included:



1. Feed the "Y" strap (A) through the bottom of the helmet, ensuring the logo is facing out
2. Loop the baseplate (B) onto the slotted strap
3. Pull the strap back through the accessory slot
4. Attach the strap clip (fits around the earmuff) by feeding it back through the accessory slot
5. Pull rubber band tight
6. Simply slide the SL-SideSaddle into the mount

Hats and Bump Caps



Accessories included:




1. Unscrew the threaded pins on the rear mounting bracket (C)
2. Place in desired location on the inside of the hat
3. Place the top mounting bracket (D) on top of the pins and lock the thumb screws in place
4. Swivel and adjust the light to where you want it

Full Brim Hard Hats



Accessories included:



1. Feed the strap (E) through the bottom of the hard hat, ensuring the logo is facing out
2. Loop the baseplate (B) onto the slotted strap
3. Pull the strap back through the accessory slot
4. Attach the strap clip (F) by feeding it back through the accessory slot
5. Pull rubber band tight
6. Simply slide the SL-SideSaddle into the mount

Traditional Hard Hats



ENDURO® PRO HAZ-LO®



Intrinsically safe with spot and flood modes

- Class 1, Div. 1 safety ratings
- Multi-function switch
- 45° tilting head

	SPOT	FLOOD	COMBO
LUMENS	160	160	235
CANDELA	1,320	100	--
DISTANCE	73m	20m	--
RUN TIME	5 hrs	5 hrs	4.75 hrs



Class I, II, Div. 1, Grps. A, B, C, D, E, F, G;
Class III, Class 1, Zn O, Grps. IIC, Exia
T-Code: T4



Permissible Portable Headlamp Assembly
App. No. 20-A07001-0
Tested for use in methane-air mixtures only

Description	Item #
Enduro Pro HAZ-LO - Includes (3) AAA alkaline batteries, elastic headstrap, rubber hard hat strap and 3M® Dual Lock® - Yellow	61424

Size and Weight	Battery
2.19" (5.56 cm); 3.5 oz (99.2g)	(3) AAA alkaline

Two hard hat mounting options:

Rubber strap

3M® Dual Lock® for strapless mounting



3AA HAZ-LO® HEADLAMP



Intrinsically safe alkaline battery operated headlamp

- Class 1, Div. 1 safety ratings
- Long-running, high performance headlamp
- Exceptional light output

LUMENS	270
CANDELA	5,600
DISTANCE	150m
RUN TIME	8 hrs



Description	Item #
3AA HAZ-LO - Includes rubber and elastic headstraps and (3) alkaline AA batteries - Yellow	61200

Size and Weight	Battery
3.08" (7.82 cm); 7.1 oz (202g)	(3) AA alkaline batteries



Class I, Div. 1, Grps. A, B, C, D;
Class II, Div. 1, Grps. E, F, G
Class III, T-Code: T4



USB HAZ-LO® HEADLAMP



Rechargeable, Class 1, Div 1 headlamp

- Multiple modes cover a variety of tasks with just one light; spot, flood and combo
- Charge indicator LEDs: Red=charging; Green=charged; charges in 4.5 hours
- Multi-function switch is easy to use

	SPOT	FLOOD	COMBO
LUMENS	190	120	250
CANDELA	2,000	90	--
DISTANCE	89m	19m	--
RUN TIME	7.5 hrs	13 hrs	7 hrs



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G
Class III, CL 1, Zn 0, IIC
T-Code: T4

Description	Item #
USB HAZ-LO Headlamp - Includes 120V AC cord, elastic headstrap, rubber hard hat strap and 3M® Dual Lock® - Yellow	61460
USB HAZ-LO Headlamp - 120V AC charge cradle, elastic headstrap, rubber hard hat strap and 3M® Dual Lock® - Yellow	61463

Size and Weight	Battery
1.72" (4.36 cm); 4.1 oz (116.2g)	Lithium-ion

Two hard hat mounting options:

Rubber strap

3M® Dual Lock® for strapless mounting





PROTAC® HL USB HEADLAMP



These high-lumen headlamps are the perfect flashlight for when your task requires both hands and a bright light with a wide beam; rechargeable and non-rechargeable options available

- Multi-fuel design; uses the same battery as the Strion (#74175) or SL-B26 rechargeable battery pack
- TEN-TAP® Programmable
- 90° tilting head reduces head fatigue



PROTAC® HL HEADLAMP

- Offers a broad beam for maximum light coverage
- TEN-TAP® Programmable
- 90° tilting head reduces head fatigue



	HIGH	MEDIUM	LOW
LUMENS	1,000	400	65
CANDELA	13,500	5,400	900
DISTANCE	232m	147m	60m
RUN TIME	1.5 hrs	2.75 hrs	20 hrs



	HIGH	MEDIUM	LOW
LUMENS	635	105	20
CANDELA	8,500	1,450	280
DISTANCE	184m	76m	33m
RUN TIME	1.75 hrs	8 hrs	36 hrs

Description	Item #
ProTac HL USB Headlamp - Clam - Black	61305
ProTac HL USB Headlamp - Box - Black	61307

Size and Weight	Battery
4.03" (10.24 cm); 8.1 oz (230g)	Lithium-ion; also accepts SL-B26 battery pack

Description	Item #
ProTac HL Headlamp - Includes rubber and elastic headstraps and (2) CR123A lithium batteries - Black	61304

Size and Weight	Battery
3.66" (9.29 cm); 6.6 oz (187g)	(2) CR123A lithium

PROTAC® 2.0 HEADLAMP



Ultra-powerful, rechargeable headlamp

- Powered by our SL-B50® rechargeable battery pack
- USB-C rechargeable, inside of the light; recharges in 6 hours
- TEN-TAP® Programmable



	HIGH	MEDIUM	LOW
LUMENS	2,000	650	110
CANDELA	14,500	4,200	750
DISTANCE	241m	130m	55m
RUN TIME	2.25 hrs	4.5 hrs	25 hrs

Description	Item #
ProTac 2.0 Headlamp - Includes (1) SL-B50 battery pack, USB-C cord, elastic and rubber straps - Black	89001
Size and Weight	Battery
4.92" (12.5 cm); 10.48 oz (297.1g)	(1) SL-B50 battery pack



TRIDENT®



IPX4

Multi-purpose headlamp with a long run time on low

- Versatility of switching between modes
- Multi-function switch remembers the last mode used
- 90° tilting head



White LED	HIGH	MEDIUM	LOW
LUMENS	80	35	11
CANDELA	4,000	385	120
DISTANCE	126m	39m	22m
RUN TIME	5 hrs	10 hrs	53 hrs

Green LED	HIGH	MEDIUM	LOW
LUMENS	80	25	6
CANDELA	4,000	275	55
DISTANCE	126m	33m	15m
RUN TIME	5 hrs	19.5 hrs	63 hrs



Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G
Class III, T-Code: T5

Description	Item #
Trident - White LEDs - Includes rubber and elastic headstraps and (3) alkaline AAA batteries - Yellow	61050
Trident - White and Green LEDs - Includes rubber and elastic headstraps and (3) alkaline AAA batteries - Green	61051

Size and Weight	Battery
2.4" (6.9 cm); 5.5 oz (156g)	(3) AAA alkaline batteries

SEPTOR®



IPX4

Flood light headlamp for close up tasks or arm's length

- Soft, wide beam illuminates your work area
- Multi-function switch remembers the last mode used
- 90° tilting head

	HIGH	MEDIUM	LOW
LUMENS	120	45	13
CANDELA	900	375	100
DISTANCE	60m	35m	20m
RUN TIME	3.5 hrs	10 hrs	55 hrs



Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G
Class III, T-Code: T5

Description	Item #
Septor - Includes rubber and elastic headstraps and (3) alkaline AAA batteries - Yellow	61052

Size and Weight	Battery
2.4" (6.9 cm); 5.5 oz (156g)	(3) AAA alkaline batteries

ARGO®



IPX4

Tilting headlamp for your work place

- Intense, long-distance beam
- Down range illumination with three levels of output
- 90° tilting head

	HIGH	MEDIUM	LOW
LUMENS	150	100	45
CANDELA	9,250	6,375	2,750
DISTANCE	190m	160m	103m
RUN TIME	3 hrs	4.5 hrs	30 hrs



Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G
Class III, T-Code: T5

Description	Item #
Argo - Includes rubber and elastic headstraps and (3) alkaline AAA batteries - Yellow	61301

Size and Weight	Battery
2.4" (6.9 cm); 5.4 oz (153g)	(3) AAA alkaline batteries

BANDIT® PRO



IPX4

Lightweight, long lasting headlamp

- Snap-in clip adaptor attaches to a pocket, jacket or to the visor on a hat; adds additional downward adjustability
- USB rechargeable with battery life indicator; recharges in 3.5 hours
- Smooth and diffused light for up close tasks



	HIGH	LOW
LUMENS	180	35
RUN TIME	4.5 hrs	21 hrs
Emergency flash - 180 lumens		

Description	Item #
Bandit Pro - Includes USB cord - Clam - Yellow	61710
Bandit Pro - Includes USB cord - Clam - Black	61714
Bandit Pro - Includes elastic headstrap, rubber hard hat strap, 3M® Dual Lock® and USB cord - Box - Yellow	61716

Size and Weight	Battery
2.7" (6.85 cm); 1.6 oz (45.4g)	Rechargeable lithium polymer

BANDIT®



IPX4

Ultra-lightweight, low-profile headlamp

- Large button for easy actuation
- USB rechargeable battery
- Snap-in clip adaptor attaches to a pocket, jacket or to the visor on a hat; adds additional downward adjustability
- Delivers a wide even beam with minimum shadows, perfect for close-up work

Yellow & Black Models: White LED



White LED	HIGH	LOW
LUMENS	180	35
RUN TIME	2 hrs	9.5 hrs
Emergency flash - 180 lumens		

Coyote Models: White/Red LED
White/Green LED



Green LED	HIGH	LOW
LUMENS	135	25
RUN TIME	3 hrs	13.5 hrs
Red LED	HIGH	LOW
LUMENS	45	10
RUN TIME	2.5 hrs	10 hrs

Description	Item #
Bandit - Includes USB cord - Clam - Yellow	61700
Bandit - Includes USB cord - Clam - Black	61702
Bandit - Includes USB cord - Clam - Coyote with Red LED	61706
Bandit - Includes USB cord - Clam - Coyote with Green LED	61707
Bandit - Includes elastic headstrap, rubber hard hat strap, 3M® Dual Lock® and USB cord - Box -Yellow	61703

Size and Weight	Battery
2.7" (6.85 cm); 1.3 oz (36.8g)	Rechargeable lithium polymer



SLEDGE®



IPX4

Low profile, multi-fuel flood headlamp

- Delivers up to 600 lumens of consistent output, with THRO® mode providing a short burst of 1,000 lumens
- Multi-function push-button switch easy to use with gloves
- 45° tilting head

	THRO	HIGH	MEDIUM	LOW
LUMENS	1,000	600	300	100
CANDELA	3,000	1,800	850	310
DISTANCE	110m	85m	58m	35m
RUN TIME	60 sec	4.25 hrs	9.25 hrs	13 hrs



Description	Item #
Sledge - Includes elastic and rubber hard hat headstrap, (1) SL-B26 battery pack and USB-C cord - Black	89019
Size and Weight	Battery
1.57" (4 cm); 4.6 oz (121.9g)	(1) SL-B26 battery pack

SLEDGE®

-RUGGED, MULTI-FUEL
FLOOD HEADLAMP

-1,000 LUMENS

DOUBLE CLUTCH® USB



IPX4

Multi-fuel, dual-function, dual-output headlamp

- Facecap twists for easy functionality even with gloves
- 60° tilting head
- Flexibility to shift between beams and modes to fit your task

	HIGH	LOW
LUMENS	125	30
SPOT CANDELA	1,700	400
SPOT DISTANCE	82m	40m
FLOOD CANDELA	250	70
FLOOD DISTANCE	31m	4m
RUN TIME Lithium Polymer	3.5 hrs	10 hrs
RUN TIME Alkaline	6 hrs	18 hrs

Description	Item #
Double Clutch USB - 120V AC - Yellow	61602
Double Clutch USB - 120V AC - Black	61603
Double Clutch USB - Includes USB-C cord - Yellow	61600
Double Clutch USB - Includes USB-C cord - Black	61601
Double Clutch - Alkaline Model - Includes (3) alkaline batteries - Yellow	61607
Double Clutch - Alkaline Model - Includes (3) alkaline batteries - Black	61608

Size and Weight	Battery
2.5" (6.35 cm); 3.7 oz (105g)	Lithium Polymer or (3) alkaline batteries



HEADLAMP ACCESSORIES

DESCRIPTION	ITEM #	SL-SIDESADDLE	PROTAC HL HEADLAMP	PROTAC HL USB HEADLAMP	SLEDGE	PROTAC 2.0 HEADLAMP	DOUBLE CLUTCH USB	ENDURO PRO	ENDURO PRO USB	ENDURO PRO HAZ-LO	USB HAZ-LO HEADLAMP	BANDIT SERIES
CR123A Batteries - 2pk	85175		√									
CR123A Batteries - 6pk	85180		√									
CR123A Batteries - 12pk	85177		√									
CR123A Batteries - 400pk	85179		√									
Li-ion Battery Stick	74175			√								
SL-B26 Battery Pack - 1pk	22101			√	√							
SL-B26 Battery Pack - 2pk	22102			√	√							
SL-B26 Battery Pack - 8pk	22105			√	√							
SL-B50 Battery Pack - 1pk	22111					√						
SL-B50 Battery Pack - 2pk	22112					√						
Lithium Polymer Battery	61604						√					
Li-ion Battery Pack Kit - USB	22010			√								
Li-ion Battery Pack Kit - 120V AC	22011			√								
120V AC USB Charge Cord	22071			√			√		√		√	√
120V AC Bank Charger	61469										√	
Charge Cradle	61465										√	
40" USB Cord	22070			√			√		√			√
22" USB Cord	22081			√			√		√			√
22" USB-C Cord	22084				√	√						
Green Filter	89012					√						
Hard Hat Clips for 1" Strap	61437				√			√	√	√	√	√
Hard Hat Base	61622	√										
Universal Y-Strap	61623	√										
Slot Strap Kit	61624	√										



STREAM™ SERIES



MEGASTREAM® USB



IPX7

Rechargeable flashlight combining intense brightness with long-distance beam reach and long run time

- The hot-swappable battery capability lets you keep going—charge one battery while using another, so you always have a fully charged backup
- Powered by a SL-B34 rechargeable battery; recharges in 5 hours
- Sliding sleeve protects the USB port

	HIGH	MEDIUM	LOW
LUMENS	1,800	500	150
CANDELA	26,000	7,200	2,100
DISTANCE	322m	170m	92m
RUN TIME	2 hrs	3.5 hrs	13 hrs

Description	Item #
MegaStream USB - Includes USB-C cord, holster and SL-B34 battery pack - Black	66210

Size and Weight	Battery
5.3" (13.4 cm); 5.4 oz (152g)	(1) SL-B34 battery pack



MEGASTREAM® HP USB



IPX7

Powerhouse, high-candela, long range flashlight designed for convenience, it slips effortlessly into your bag

- Power up via the charge port in the body or swap out the removable battery to charge while using a fresh one
- Slide the head cover back for USB-C port
- Powered by a SL-B34 rechargeable battery; recharges in 5 hours

	HIGH	MEDIUM	LOW
LUMENS	1,350	470	145
CANDELA	310,000	108,000	32,000
DISTANCE	1,114m	657m	358m
RUN TIME	2 hrs	4 hrs	15 hrs



Description	Item #
MegaStream HP USB - Includes USB-C cord, holster and SL-B34 battery pack - Black	66211

Size and Weight	Battery
6.61" (16.8 cm); 9 oz (254g)	(1) SL-B34 battery pack

MICROSTREAM®



Ultra-compact personal light

- Clip it to your hat or pocket
- Alkaline battery powered

LUMENS	45
CANDELA	420
DISTANCE	41m
RUN TIME	2.25 hrs



Description	Item #
MicroStream - Includes (1) AAA alkaline battery - Black	66318

Size and Weight	Battery
3.6" (9.15 cm); 1.1 oz (31.2g)	(1) AAA alkaline battery

MACROSTREAM® USB



High-power, rechargeable flashlight

- Lithium-ion battery charges in 4 hours
- Durable aluminium construction
- Pocket clip attaches to visor

	HIGH	LOW
LUMENS	500	50
CANDELA	2,000	220
DISTANCE	90m	30m
RUN TIME	2 hrs	8 hrs



Description	Item #
MacroStream USB - Includes lanyard - Black	66320

Size and Weight	Battery
4.5" (11.43 cm); 2.2 oz (62.4g)	Lithium-ion

MICROSTREAM® USB



Rechargeable pocket light

- Discreet light that fits in your pocket
- Clip it to your pocket or hat for hands-free use
- USB rechargeable – metal sleeve protects charge port; slide sleeve forward to reveal charge port

Description	Item #
MicroStream USB - Includes lanyard - Clam - Black	66601
MicroStream USB - Includes lanyard - Box - Black	66604
MicroStream USB - Includes lanyard - Clam - Coyote	66608
MicroStream USB - Includes lanyard - Box - Coyote	66609

Size and Weight	Battery
3.87" (9.83 cm); 1.2 oz (34.1g)	Lithium-ion

	HIGH	LOW
LUMENS	250	50
CANDELA	1,150	250
DISTANCE	68m	31m
RUN TIME	1.5 hrs	3.5 hrs



STYLUS® SERIES

STYLUS PRO®



Compact, durable penlight to carry on a daily basis

- Fits easily in your pocket
- Low battery indicator - strobes when batteries are needed

Description	Item #
Stylus Pro - Includes (2) AAA alkaline batteries - Black	66118
Stylus Pro - Includes (2) AAA alkaline batteries - Silver	66121
Stylus Pro - Includes (2) AAA alkaline batteries - Red	66120
Stylus Pro - Includes (2) AAA alkaline batteries - Blue	66122
Stylus Pro - Includes (2) AAA alkaline batteries - Lime Green	66129
Stylus Pro - Includes (2) AAA alkaline batteries - Orange	66128

Size and Weight	Battery
5.3" (13.4 cm); 1.64 oz (46.9g)	(2) AAA alkaline batteries

LUMENS	100
CANDELA	950
DISTANCE	62m
RUN TIME	8 hrs



STYLUS PRO® USB // STYLUS PRO® USB UV



Rechargeable penlight, ideal for illuminating hard-to-reach spaces

- Recharges in 2.5 hours
- Powers on in "low" mode; press twice for high mode
- UV Model features a purple sleeve for easy identification

Description	Item #
Stylus Pro USB - 120V AC with holster - Black	66133
Stylus Pro USB - Includes holster - Black	66134
Stylus Pro USB UV - 120V AC with holster - Black	66148
Stylus Pro USB UV - Includes holster - Black	66149

Size and Weight	Battery
5.95" (15.1 cm); 1.8 oz (51g)	Lithium-ion

WHITE LED	HIGH	LOW
LUMENS	350	90
CANDELA	2,950	840
DISTANCE	109m	58m
RUN TIME	1.5 hrs	3.5 hrs



400NM UV LED	
OUTPUT	250mW
RUN TIME	2.5 hrs

STYLUS®



Ultra-slim penlight with a long battery life

- Multi-use penlight
- Removable pocket clip

LED Color	WHITE	GREEN	BLUE	RED
LUMENS	11	7	2	2
CANDELA	140	59	110	53
DISTANCE	24m	15m	21m	15m
RUN TIME	24 hrs	24 hrs	24 hrs	24 hrs

Description	Item #
Stylus - Black - Red LED	65006
Stylus - Silver - White LED	65012
Stylus - Black - White LED	65018
Stylus - Black - Green LED	65020
Stylus - Black - Blue LED	65022
Stylus - Gold - White LED	65024
Stylus - Red - White LED	65035
Stylus - Blue - White LED	65050
Stylus - UL Listed - Black - White LED	65058

Size and Weight	Battery
6.21" (15.17 cm); 1.1 oz (31g)	(3) AAAA alkaline batteries

Intrinsic Safety for Haz. Loc.
 Class I, Div. 1,
 Grps. A, B, C, D, T3C
 "Classified"



SAFETY RATED MODEL OFFERED



STYLUS® ACCESSORIES

DESCRIPTION	ITEM #	STYLUS	STYLUS PRO	STYLUS PRO USB
Nylon Holster	66028		√	
Nylon Holster	66029	√		√
USB Power Adapter	22058			√
40" USB Cord	22070			√
Stylus Pro USB Battery	66143			√
AAAA Battery Pack - 6 pk	65030	√		
Glare Guard™	65031	√		
Bite Boot™ - 6 pk	66155			√
Lanyard with Push-Button Slide	72024	√		



STYLUS® REACH



Penlight featuring a flexible cable with a high-intensity white LED

- 7 inch (17.78 cm) extension cable allows for 14 inches (35.6 cm) of reach
- Ideal for seeing into tight spots

LUMENS	11
CANDELA	140
DISTANCE	24m
RUN TIME	24 hrs



SAFETY RATED
MODEL OFFERED



Intrinsic Safety for Haz. Loc.
Class 1, Div. 1,
Grps. A, B, C, D, T3C
"Classified"



Intrinsic Safety for Haz. Loc.
Class 1, Div. 1,
Grps. A, B, C, D, T3C
"Exia"

Description

Item

Stylus Reach - Black - Clam - White LED	65618
Stylus Reach - UL Listed Black - Clam - White LED	65658
Stylus Reach - Silver - Clam - White LED	65612

Size and Weight

Battery

14" (35.6 cm); 1.7 oz (48.19g)	(3) AAAA alkaline
--------------------------------	-------------------

STYLUS REACH® 18



Penlight featuring a flexible cable with a high-intensity white LED

- Provides 25" (63.5 cm) of reach
- Ideal for seeing into even tighter spots

LUMENS	11
CANDELA	140
DISTANCE	24m
RUN TIME	24 hrs



Description

Item

Stylus Reach 18	65418
-----------------	-------

Size and Weight

Battery

25.5" (64.77 cm); 2.5 oz (70g)	(3) AAAA alkaline
--------------------------------	-------------------

CLIPMATE® USB



Multi-function clip light for hands-free use

- Features a white LED and a 620-630nm red LED
- Built-in USB charge tab
- Recharges by plugging into USB port or optional AC wall adapter

Description

Item

ClipMate USB	61125
ClipMate USB - 120V AC	61126
120V AC Wall Adapter	22058

Size and Weight

Battery

3.2" (8.13 cm); 1.9 oz (53.86g)	Lithium polymer cell
---------------------------------	----------------------

	WHITE LED		RED LED	
	HIGH	LOW	HIGH	LOW
LUMENS	70	10	0.5	0.2
CANDELA	500	50	9	3
DISTANCE	44m	14m	6m	3m
RUN TIME	3.5 hrs	24 hrs	16 hrs	65 hrs





JR SERIES

STREAMLIGHT JR F-STOP®




IPX4

Handheld flood to spot work light

- It provides a smooth flood beam to illuminate your work area without tiring your eyes
- Slide the lens forward for a smooth transition to a spot beam for distance lighting

	FLOOD	SPOT
LUMENS	250	220
CANDELA	360	5,600
DISTANCE	38m	150m
RUN TIME Alkaline	6 hrs	6 hrs
RUN TIME Lithium	10 hrs	10 hrs

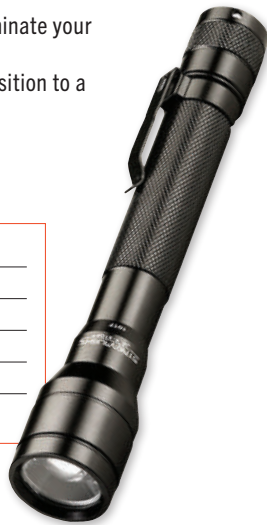

Description	Item #
Streamlight Jr. F-Stop - Includes (2) batteries - Box - Black	71700
Streamlight Jr. F-Stop - Includes (2) batteries - Clam - Black	71701
Nylon Holster	71503
Rubber Helmet Strap	99075

Size and Weight	Battery
6.5" (16.51 cm); 4.4 oz (125g)	(2) AA alkaline or lithium

STREAMLIGHT JR® LED



IPX4

Handheld AA battery-sized flashlight

- Doesn't take up a lot of space in the toolbox
- Push-button switch for momentary or constant on

LUMENS	225
CANDELA	2,700
DISTANCE	104m
RUN TIME Alkaline	6 hrs
RUN TIME Lithium	10 hrs



Description	Item #
Streamlight Jr. LED - Includes (2) AA alkaline batteries and nylon holster - Black	71500
Magnetic Clip Holder	71510
Nylon Holster	71503
Rubber Helmet Strap	99075

Size and Weight	Battery
6.5" (16.51 cm); 4.1 oz (117g)	(2) AA alkaline or lithium



KEY CHAIN SERIES

NANO LIGHT® II



IPX7

Ultra-compact key chain light easily attaches to key rings, zippers, etc.

- Snap hook easily attaches to key rings, zippers, etc.
- Rotating On/Off head switch
- Powered by one easy-to-find AAAA alkaline battery

LUMENS	20
CANDELA	120
DISTANCE	22m
RUN TIME	1 hr



Description	Item #
Nano Light II - Includes (1) AAAA alkaline battery - Black	73020

Size and Weight	Battery
2.2" (5.7 cm); 0.6 oz (18g)	(1) AAAA alkaline

POCKET MATE®



IPX4

Small but powerful hands-free light

- Ultra-compact design makes it easy to always carry with you
- Multi-function push-button switch with charge indicator
- Recharges in 4 hours

	HIGH	LOW
LUMENS	325	45
CANDELA	1,450	200
DISTANCE	76m	28m
RUN TIME	20 min	1 hr

Description	Item #
Pocket Mate - Includes Micro-USB cord - Silver	73300
Pocket Mate - Includes Micro-USB cord - Red	73301
Pocket Mate - Includes Micro-USB cord - Blue	73302
Pocket Mate - Includes Micro-USB cord - Pink	73303

Size and Weight	Battery
2" (5.1 cm); 0.5 oz (14.2g)	Lithium polymer



LIGHTS FOR A CAUSE



The Breast Cancer Research Foundation® is an independent 501 (c) (3) not-for-profit organization whose mission is to advance the world's most promising research to eradicate breast cancer in our lifetime. For more information, visit www.bcrfcure.org.



Description	Item #
Nano Light II - Pink	73022
Wedge XT - Pink	88824



By purchasing this product, you are helping to make a difference in the rebuilding of the lives of surviving families and affected co-workers of law enforcement officers killed in the line of duty. In addition to rebuilding lives, C.O.P.S. (Concerns of Police Survivors) provides training to law enforcement agencies on survivor victimization issues and educates the public of the need to support the law enforcement profession and its survivors. For more information, visit www.nationalcops.org.



Description	Item #
Nano Light II - Blue	73021
Wedge XT - Blue	88825

For every blue Wedge XT sold, Streamlight will donate \$3 to Concerns of Police Survivors, Inc. (C.O.P.S.)
 For every pink Wedge XT sold, Streamlight will donate \$3 to the Breast Cancer Research Foundation® (BCRF)

For every blue Nano Light II sold, we donate \$1 to Concerns of Police Survivors, Inc. (C.O.P.S.)
 For every pink Nano Light II sold, Streamlight will donate \$1 to the Breast Cancer Research Foundation® (BCRF)




STREAMLIGHT

BRILLIANT THINKING®

Streamlight, Inc.
30 Eagleville Road
Eagleville, PA U.S.A. 19403-3996

streamlight.com // streamlightgear.com
(800) 523-7488 Toll-Free
(800) 220-7007 Fax
(610) 631-0600
(610) 631-0712 Fax

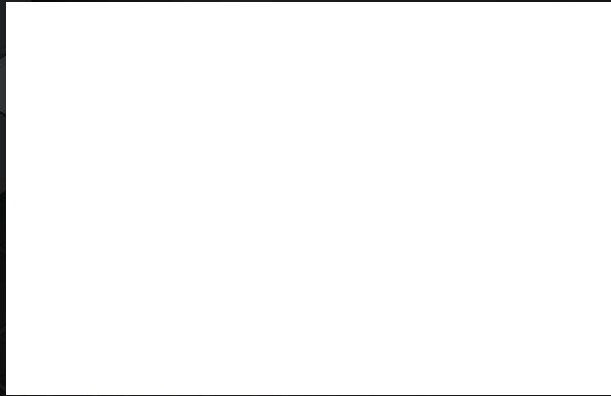

©2026 Streamlight, Inc. ISO 9001:2015 certified 4/26 asi/89871
All rights reserved. Trademarks of companies mentioned herein appear for identification purposes only and are the property of their respective companies.



The shape, style and appearance of the generally triangular feature on the head of the Stinger® Series is a trademark of Streamlight, Inc.



The silver band that encircles the head of the TLR® Series is a trademark of Streamlight, Inc.

